

EXBOX

EXBOX: Box with Exd protection for weighing and data transmission in 2GD ATEX zones



Box with Exd protection completed with weight indicator/transmitter, Zener barriers and intrinsically safe 4-20mA analog output. Fitted with 2 buttons for the main weighing operations with configurable functions, and two programmable electronic outputs for setpoints and levels management. Complete protection: ATEX II 2 (1) GD Ex d [ia Ga] IIC T6 Gb / Ex tb [ia Da] IIIC T85°C Db IP66.

**The best solution
for advanced industrial
applications**

BOX TECHNICAL FEATURES

- Aluminum alloy construction.
- Tempered glass, transparent, frontal porthole for weight reading and electronics checking.
- Painted with epoxy paint.
- 6 cable glands at disposal and standard fitted with 4 ATEX cable glands, for power supply, grounding, load cell cable and analog output.
- Weight: approx. 15kg.
- IP65 protection degree.

ANALOG OUTPUT TECHNICAL FEATURES

- Intrinsically safe Ex i barrier for 4-20mA analog output.
- Atex marking:
II (1) GD [Ex ia Ga] IIC
[Ex ia Da] IIIC (-20°C ≤ Ta ≤ +60°C)
- Ex i electronic parameters:
Um=250V
Uo= 25,2V
Io= 93mA
Po= 585mW
Co= 0,107μF
Lo= 4,30mH
L/R= 62μH/ohm

ZENER BARRIERS TECHNICAL FEATURES


- The system includes 3 Zener barriers for load cells connection. The barriers can manage up to four 350Ohm load cells.
- Atex marking for one barrier:
II (1) GD [Ex ia Ga] IIC [Ex ia Da] IIIC
- Ex i electronic parameters:
Barrier for signal and sense: $U_m=250V$
Fuse: 50mA
 U_o : 17,4V
 I_o : 25mA
 P_o : 0,11W
 C_o : 0,346 μF
 L_o : 56,88mH
 R_{min} : 705,6Ohm
Barrier for supply: $U_m=250V$
Fuse: 100mA
 U_o : 24V
 I_o : 164mA
 P_o : 0,98W
 C_o : 0,125 μF
 L_o : 1,32mH
 R_{min} : 1470hm

INDICATOR MAIN TECHNICAL FEATURES

- DGT1SAN weight indicator with analog output, specific for the reading, diagnostic and transmission of the weight of one or more load cells.
- 5-key mechanic keyboard.
- Red LED display with 6 8-mm digits and 6 LEDs for showing active functions.
- Up to 10.000e or multi-range 2 x 3000e @ 0,3 $\mu V/d$ in CE-M approved version for legal for trade use.
- Up to 100.000 displayable divisions with internal resolution up to 3.000.000 points.
- 1 channel A/D 24-bit sigma-delta conversion, up to 3200 conv./sec. auto-select.
- Fitted with 2 inputs for managing the buttons provided as standard and 2 programmable electronic outputs, for the set points and levels management.

APPLICATION EXAMPLE

- Click to zoom.

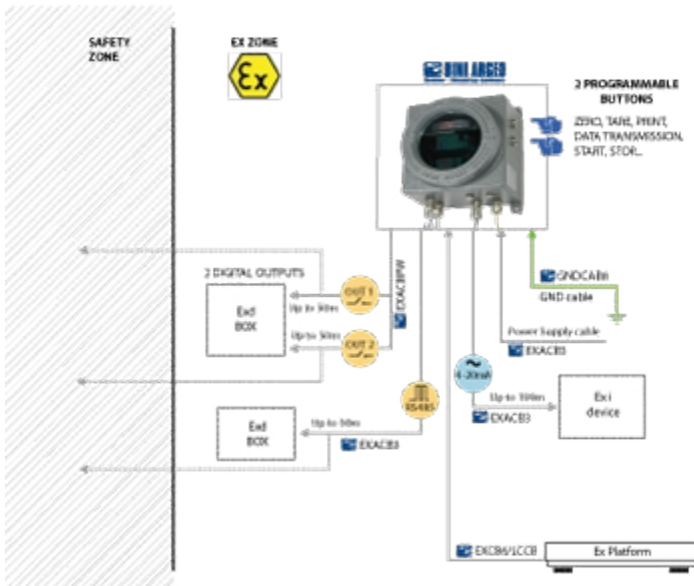



www.diniargeo.com

“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 843418

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 921784

SALES AND TECHNICAL ASSISTANCE SERVICE