

KMB4

"KMB4" BOX WITH PASSIVE SAFETY ZENER BARRIERS, FOR ATEX ENVIRONMENTS



Kit of three intrinsic protection Zener barriers, for connection of devices in ATEX area with devices in safe area, housed in an ABS box.

Marking of single barrier: ATEX II (1) GD [Ex ia Ga] IIC [Ex ia Da] IIIC.

Marking of the whole box with three Zener barriers:

ATEX II 3(1)G Ex nA [ia Ga] IIC T4 Gc ($-20^{\circ}\text{C} \leq T_a \leq +40^{\circ}\text{C}$) for gas

ATEX II 3(1)D Ex tb [ia Da] IIIC T130°C Dc IP65 ($-20^{\circ}\text{C} \leq T_a \leq +40^{\circ}\text{C}$) for dust.

SINGLE CHANNEL FEATURES

- Barrier for signal and sense: $U_m=250V$

Fuse: 50mA

U_o : 17,4V

I_o : 25mA

P_o : 0,11W

C_o : 0,346 μ F

L_o : 56,88mH

R_{min} : 705,6Ohm

- Barrier for supply: $U_m=250V$

Fuse: 100mA

U_o : 24V

I_o : 164mA

P_o : 0,98W

C_o : 0,125 μ F

L_o : 1,32mH

R_{min} : 1470hm

- NOTES:

- Connection with up to 4 load cells of 350 ohm each.

- The combination of two or more Zener barriers (1) GD [Ex ia] implies that the Atex marking of the barriers assembly must be update to (2) GD [Ex ib], as required by the EN 60079-14 standard.



WARNING

The KMB4 kit can be placed in ATEX zone according to its ATEX marking or in alternative in a safe area.




The electric coordination, executed for realizing the DCATEXMB4 certificate, involves the use of the LCCB/EXCB6 cable, maximum length of 200m (greater lengths upon price estimate).

DETAIL 1



DETAIL 2

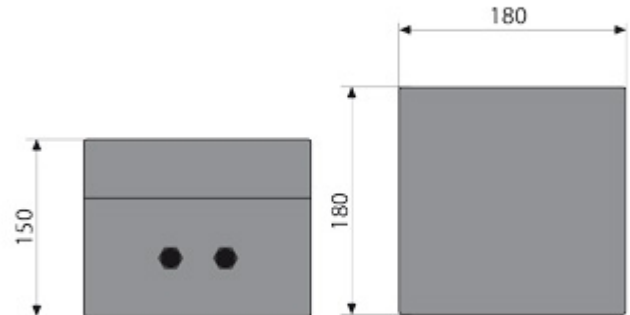

KMB4: dimensions in mm.

DETAIL 3



3 zener barriers for load cell supply, signal, and sense.
Suitable for mounting on a DIN bar in a safe area, or in a hazardous-proof case (Exd) in an ATEX area.



DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 843418

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 921784

SALES AND TECHNICAL ASSISTANCE SERVICE