


WEFL_2017

"WEFL": WALL-E FLOOR SERIES FLOOR SCALES

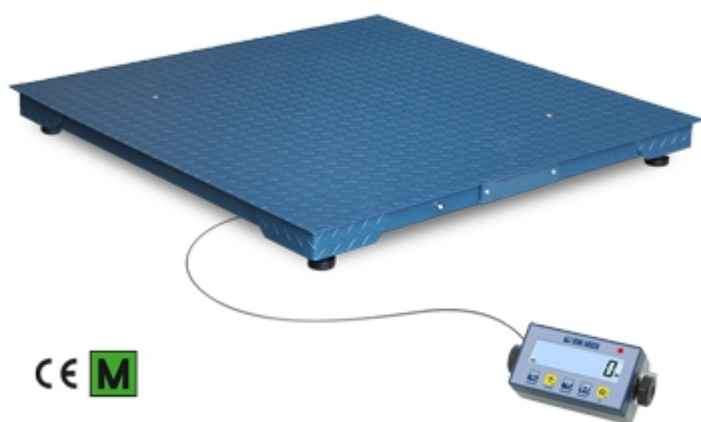

Floor scales characterized by a multifunction, compact weight indicator and a sturdy, monobloc, steel platform. Particularly suitable for industrial and commercial use, guaranteeing precision and reliability. Available also in CE-M approved version according to OIML R-76 / EN 45501 standards.

**The best solution
for advanced industrial
applications**

TECHNICAL FEATURES

- Weight indicator with ABS case, 25mm backlit LCD display with 6 high contrast digits and icons for showing the active functions. 5-key functional waterproof keypad.
- Fitted with fixing bracket with adjustable inclination.
- Functioning with 4 steel load cells, approved according to OIML R60 C3 standards, IP67 protection degree.
- Monobloc structure with oven-fire painted steel tubular, adjustable resting feet, and level.
- Protection reinforcements close to the load cells.
- Fixed load surface in chequered steel, size: see the table.
- Digital calibration and Set-Up from keypad or from PC through DINITOOLS.
- Cable 3m long for the connection between platform and indicator.
- Supplied as standard with 4 AA batteries extractable drawer (batteries not included), and 12V external power adapter (if connected it excludes the battery supply).
- Fitted with high resolution calibration for internal use, with 0.03% accuracy of the maximum capacity (activated as standard and disabled by menu).

SELECTABLE FUNCTIONS

- The user can select the operating modes directly using the dedicated key*:
 - High resolution display x 10
 - Precision weighing with temporary recalibration via a sample weight (for internal factory use)
 - Net/Gross
 - Lb to Kg converter
 - Free conversion factor (for meter and litre counters etc.)
 - Weight totalizer
 - Formulizer
 - +/- controller with quick target and threshold input
 - Percentage weighing
 - Piece counter
 - Hold

The "alibi memory" function is available in combination with the required operating mode and it is activated automatically when installing the relevant optional board.


- Optional functions:
 - PEAK, detection of weight peaks (code DFWPK)
 - Newton to Kg converter (code DFWPK)
- Access to the user menu is gained using the dedicated key* to adjust the weighing filter, date and time, setpoint and tare weight, which the user can access by entering a programmable access password.

** These quick access keys to the menus can be blocked by configuring a dedicated password.*

DETAIL 1



DETAIL 2

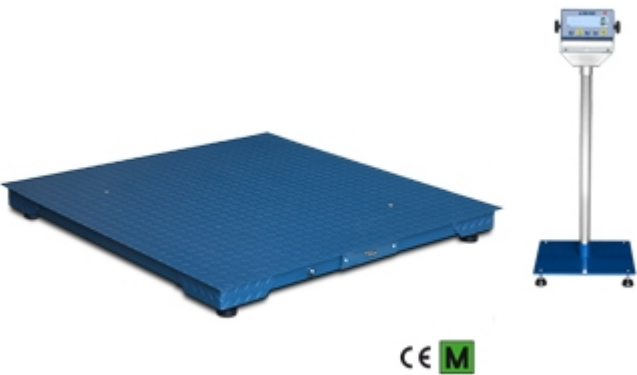

Application with optional column.

Compact multifunction weight indicator, complete with fixing bracket and backlit display.

VERSIONS

Available versions						
	Codice	l x w x h (mm)	N° celle	Max (kg)	d (kg)	<div>CE M</div> 2R (kg)*
	<u>WEFLB1500-1</u>	1250x1250x120	4x1000kg	600/1500	0,2/0,5	0,2/0,5
	<u>WEFLD3000-1</u>	1250x1500x120	4x2000kg	1500/3000	0,5/1	0,5/1
	<u>WEFLE3000-1</u>	1500x1500x120	4x2000kg	1500/3000	0,5/1	0,5/1

(*) These divisions are obtainable only with the relative options.



www.diniargeo.com

“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 843418

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 921784

SALES AND TECHNICAL ASSISTANCE SERVICE