


DAC160\_OLD20210401

"DAC160": 16 BIT ANALOGUE PROGRAMMABLE OUTPUT

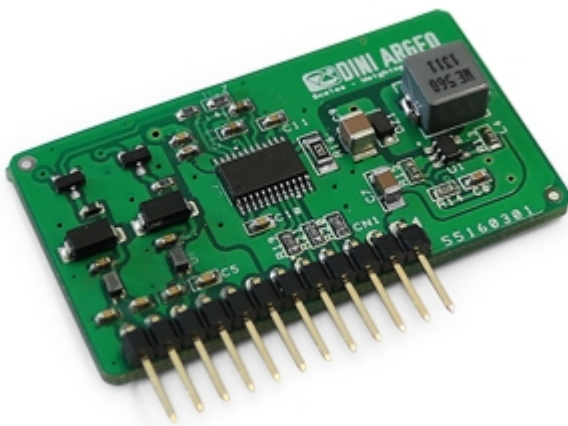

16 bit analogue output, in voltage or in current. Programmable as 0...5/0...10Vdc, 0...20/4...20mA through the **indicator** or through the PC with Dinitools. Particularly suitable for use with PLC's and in industrial environments.

The best solution  
for advanced industrial  
applications

## TECHNICAL FEATURES:

- Output values programmable through the indicator or through the PC Dinitools: 0...5/0...10Vdc or 0...20/4...20mA.
- 16 bit resolution (65536 divisions).
- Update frequency: from 30 to 50Hz (depending on the weight indicator).
- Precision: minimum +/- 0.08%, typical 0.015% in relation to the F.S.O. of the analogue output (operating temperature 25°C).
- Maximum applicable resistance on the output in current: 350 ohm.
- Minimum applicable resistance on the output in voltage: 10 Kohm.
- Easily configurable through the indicator or through the PC using Dinitools.



**DINI ARGEO**  
FRANCE sarl  
France

**DINI ARGEO**  
GMBH  
Germany

**DINI ARGEO**  
UK Ltd  
United Kingdom

**DINI ARGEO WEIGHING**  
INSTRUMENTS Ltd  
China

**DINI ARGEO**  
OCEANIA  
Australia



#### COMPANY HEADQUARTERS

Via Della Fisica, 20  
41042 Spezzano di Fiorano Modena • Italy  
Tel. +39.0536 843418

#### SERVICE ASSISTANCE

Via Dell'Elettronica, 15  
41042 Spezzano di Fiorano Modena • Italy  
Tel. +39.0536 921784

SALES AND TECHNICAL ASSISTANCE SERVICE