


RFITR\_OLD20210719

"RFI": 868MHz RADIO FREQUENCY INTERFACE

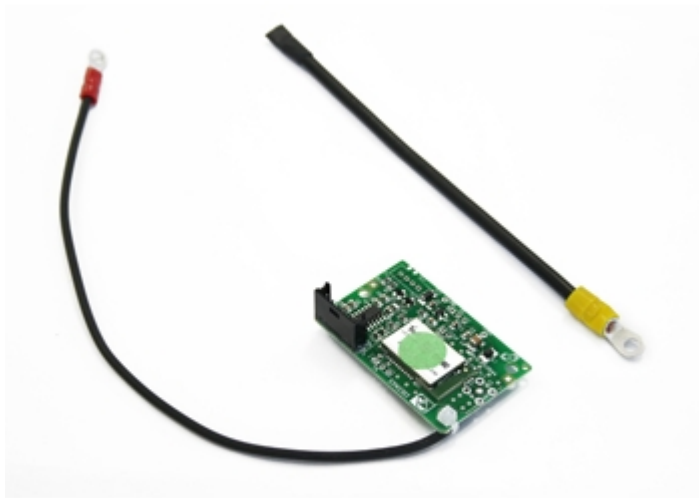

Interface which allows to convert a RS232 signal into an 868MHz radio frequency. Up to 50 transmission channels, configurable through the programme for PC. Thanks to the reduced energy consumption and to the long transmission distance, this is ideal for creating mobile systems or wireless radio transmissions.

**The best solution  
for advanced industrial  
applications**

## TECHNICAL FEATURES:

- Operating frequency from 868 to 870 Mhz, which reduces the risk of interferences with the classic radio frequency systems. This work frequency allows also to install new systems in the same environments in which there are weighing systems fitted with the previous interfaces.
- Up to 50 different channels, easily programmable through a programme on PC, in order to install various independent systems in the same work area.
- Max. functioning distance in appropriate environmental and installation conditions: up to 70m indoors, and up to 150m outdoors.
- Input signal: RS232/USB standard.
- Integrated installation inside the scale.
- Does not require particular communication protocols, trasmission in transparent manner of any character received in input.



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO  
FRANCE sarl  
France

DINI ARGEO  
GMBH  
Germany

DINI ARGEO  
UK Ltd  
United Kingdom

DINI ARGEO WEIGHING  
INSTRUMENTS Ltd  
China

DINI ARGEO  
OCEANIA  
Australia



#### COMPANY HEADQUARTERS

Via Della Fisica, 20  
41042 Spezzano di Fiorano Modena • Italy  
Tel. +39.0536 843418

#### SERVICE ASSISTANCE

Via Dell'Elettronica, 15  
41042 Spezzano di Fiorano Modena • Italy  
Tel. +39.0536 921784

SALES AND TECHNICAL ASSISTANCE SERVICE