


## ADC16I

"ADC16I": 16bit ANALOGUE INPUT

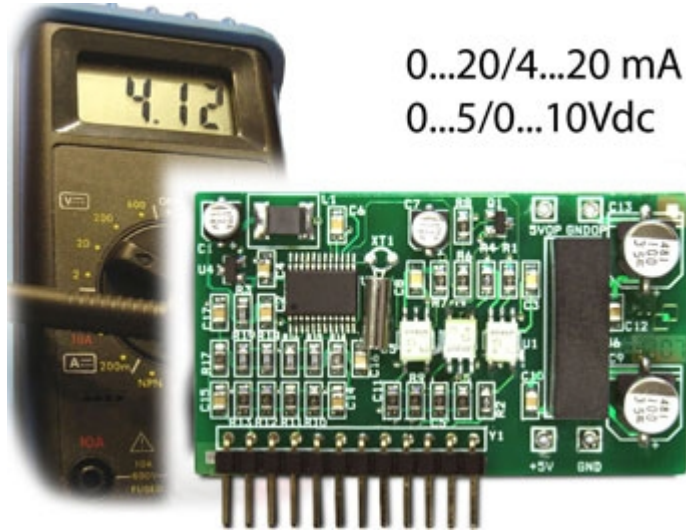

0...20/4...20 mA  
0...5/0...10Vdc

Optoisolated 16 bit analogue input, in voltage or in current. Programmable as 0...5/0...10Vdc, 0...20/4...20mA through the indicator or through the PC with Dinitools. It may be integrated in the indicators for checking the flow and dosage, for remote programming of the setpoint of hourly flow.

**The best solution  
for advanced industrial  
applications**

## TECHNICAL FEATURES:

- Reference values for input sampling programmable from the indicator or from the PC with Dinitools: 0...5/0...10Vdc or 0...20/4...20mA.
- 16 bit resolution (65536 divisions).
- Reading speed: up to 100Hz (depending on the weight indicator).
- Maximum applicable resistance on the input in current: 250 ohm.
- Minimum applicable resistance on the input in voltage: 15 Kohm.
- Easily configurable through the indicator or through the PC using Dinitools.
- Available for: CPWEBELT.
- NOTE: this board is an option available only when ordering the weight indicator.



“YOUR WORLDWIDE PARTNER FOR WEIGHING”

**DINI ARGEO  
FRANCE sarl**  
France

**DINI ARGEO  
GMBH**  
Germany

**DINI ARGEO  
UK Ltd**  
United Kingdom

**DINI ARGEO WEIGHING  
INSTRUMENTS Ltd**  
China

**DINI ARGEO  
OCEANIA**  
Australia



**COMPANY HEADQUARTERS**

Via Della Fisica, 20  
41042 Spezzano di Fiorano Modena • Italy  
Tel. +39.0536 843418

**SERVICE ASSISTANCE**

Via Dell'Elettronica, 15  
41042 Spezzano di Fiorano Modena • Italy  
Tel. +39.0536 921784



**SALES AND TECHNICAL ASSISTANCE SERVICE**