

KSD

KSD series stainless steel digital bench scales



TOLERANCE +/-
  

These bench digital scales are characterized by a solid and versatile stainless steel body with a large plate.

The new multifunctional programme allows the operator to choose the desired mode to carry out checks, piece-counting, percentage weighing and totalisation.

The long lasting battery power supply and the lateral handles allow an easy transport of the scale directly where it is necessary.

**The best solution
for advanced industrial
applications**

DIGITAL SCALES: TECHNICAL FEATURES

- STAINLESS steel digital scales body, resistant and easy to clean.
- Stainless steel load plate, inspectionable and easily cleanable. Dimensions 250x340mm.
- Alluminium load cells.
- 40mm LCD display, with different backlight colors.
- Waterproof keyboard and multifunctional programme.
- IP44 protection.
- Non-slip adjustable feet.
- Ergonomic lateral handle.
- Level positioned under the plate.
- Serial port RS232 for connection to Pc or printer.
- Digital scale power supply: internal rechargeable battery (operating time 40h approximately) or external power supply/battery charger.

DIGITAL SCALES: MAIN CERTIFICATIONS

- KSD scales certificates are:
 - EU Type Examination Certificate (45501:2015)
 - OIML R76


I/O SECTION

- Bidirectional port RS232/C, programmable for connection to printer/labeller, or for printer attached to the indicator.
- Bidirectional port RS232/C (RS485 optional) programmable for PC, PLC, additional remote display or radio modem. RJ connector for rapid linkage.

SELECTABLE FUNCTIONING MODE

- Through the specific key, it is possible to choose the desired functioning mode:
- SELECTABLE FUNCTIONS:
 - High resolution visualization x 10.
 - Precision weighing by standard weight (for internal use).
 - Net/Gross, or lb/kg conversion.
 - Weight totalization.
 - Formulation.
 - +/- check
 - Percentage weigh.
 - Approved weight transmission to PC/PLC or printer.
 - Piece counting.
 - Hold
- OTHER STANDARD FUNCTIONS:
Zeroing, Tare, Preset tare, Automatic tare, Auto switch-off.

DETAIL 1

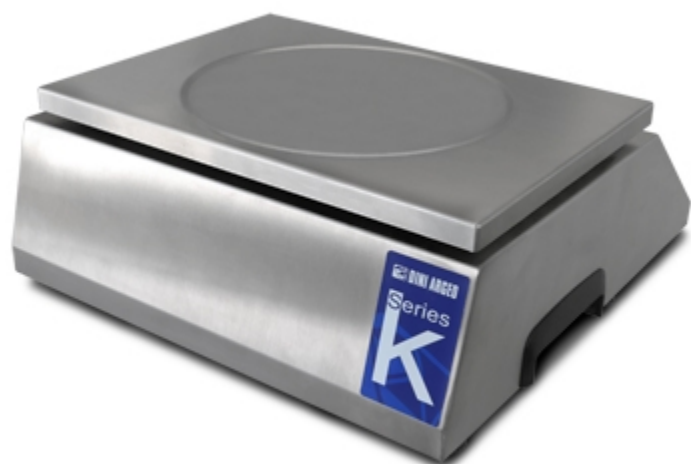

DETAIL 2



DETAIL 3



VERSIONS

Available versions

Codice	Max (kg)	d (g)	 2R (g)*
KSD6C6	3/6	0.5/1	0.5/1
KSD6	3/6	1/2	1/2
KSD15	6/15	2/5	2/5
KSD30	15/30	5/10	5/10

(*) CE-M divisions are obtainable only with the relative options.



DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 843418

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 921784

SALES AND TECHNICAL ASSISTANCE SERVICE