

3590ED

3590ED "COLOUR": EVOLVED WEIGHT INDICATOR WITH 40mm DISPLAY



Digital weight indicator, with high performance 40mm RGB and very intense bright display, for a clear visibility in any environment, indoor or outdoor, thanks to colour and brightness freely configurables. Fitted with 3 serial ports, transmission protocols for data communication, completely configurable printouts, integrated alibi memory and port for connection to barcode/badge reader. The wide range of connectable accessories and printers guarantees the maximum interfaceability and versatility. CE-M approvable (OIML R-76 / EN 45501).

**The best solution  
for advanced industrial  
applications**

## MAIN FEATURES

- 25-key alphanumeric waterproof keyboard.
- Very intense bright dot LED RGB, h=40mm, with intensity and colour quickly configurable through the keyboard.
- Backlit LCD graphic 25x100mm display.
- Easy to clean STAINLESS STEEL waterproof IP68 enclosure; resistant to harsh and corrosive environments.
- Dimensions: 280x132x185 mm.
- Suitable for use on the table, column, or wall.
- Real time clock and permanent data storage.
- Fitted alibi memory, integrated on the motherboard.
- Functions available with DINITOOLS utility
  - Configuration, calibration, data entry and print formatting.
  - Recording and filing of all the information on PC.
  - Complete retrieval of the data saved for quick substitution.
  - Instrument calibration with numeric values.
- Selection of the programme language directly in the set-up.
- 24-bit A/D converter, 4 channels, up to 3200 conv./sec. and up to 8 signal linearisation points.
- 4 independent analogue channels (up to 2 in the E-AF03 version, 1 in the E-AF09 version) for reading of the weight.
- Management of 16 analog load cells of 350 Ohm (45 cells at 1000 Ohm);  
NOTE: for the management of digital load cells for weigh bridges, see the range of [touchscreen indicators](#).
- Up to 10.000e OIML or 3 x 3000e @ 0,3 µV/e CE-M legal for trade.
- Up to 1.000.000 displayable divisions for internal factory use, with internal resolution up to 3.000.000 points.
- Connectable to printers and labellers with the command drivers.
- 110-240 Vac power supply.

## MAIN CERTIFICATIONS

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R134 (AF09)
- NMI S788 certificate

## APPLICATION SOFTWARE

- SUPPLIED AS STANDARD:
- [AEQ1](#): Totalization and formula weighing

### OPTIONAL:

- [AEQ2](#): Pieces/quantity counting
- [AEQ3](#): Weighbridges - Input/Output vehicle
- [AEQ4](#): Statistical checking of prepackaged goods
- [AEQ5](#): Price computing and industrial labelling
- [AEQ8](#): Wheel and axle static weighing with 2 or various platforms
- [AEQ9](#): Dynamic and static axle weighing with 2 platforms
- [BATCH1](#): Single product dosage systems in loading and unloading

## CUSTOMISED APPLICATIONS

Thanks to our integrated development, you can create complete customised applications in autonomy:


- wizards, operator messages
- serial port management, protocols customization
- digital I/O full management
- sequential or simultaneous automations
- data entry, custom archives

Dini Argeo can offer the service of custom development programs.

## I/O SECTION

- 2 RS232 serial ports, for connection to printer, PC or PLC, radio module and optinal interfaces.
- 1 RS232 serial port (optional RS485), for connection to weight repeater, remote scale, badge reader.
- Fitted keyboard emulation input, for barcode/badge readers or external PC keyboard, through cable with mini DIN connector (optional).
- 4 optoisolated outputs (optional).
- 2 optoisolated inputs (optional).
- External Profibus interface (optional), for automation management.
- Modbus RTU protocol.
- Optional Bluetooth connection, for quick wireless programming of the activities and the formulas, through PC, tablet or smartphone.

## DETAIL 1

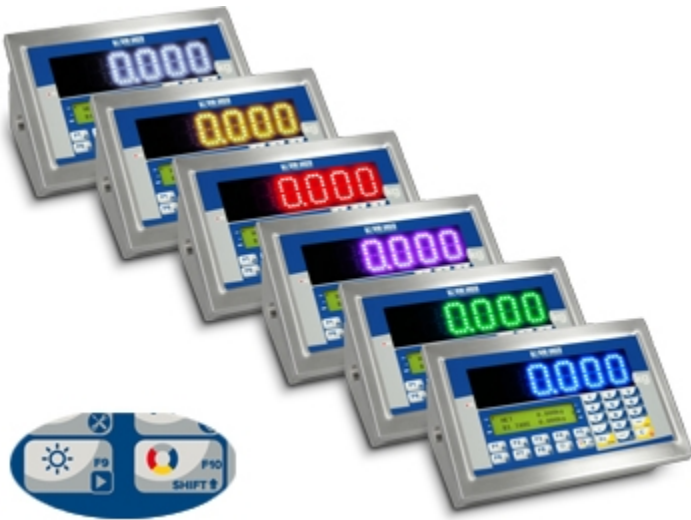



**DINI ARGEO**  
FRANCE sarl  
France

**DINI ARGEO**  
GMBH  
Germany

**DINI ARGEO**  
UK Ltd  
United Kingdom

**DINI ARGEO WEIGHING**  
INSTRUMENTS Ltd  
China

**DINI ARGEO**  
OCEANIA  
Australia



#### COMPANY HEADQUARTERS

Via Della Fisica, 20  
41042 Spezzano di Fiorano Modena • Italy  
Tel. +39.0536 843418

#### SERVICE ASSISTANCE

Via Dell'Elettronica, 15  
41042 Spezzano di Fiorano Modena • Italy  
Tel. +39.0536 921784

SALES AND TECHNICAL ASSISTANCE SERVICE