



WEIGHT INDICATORS

CATALOGUE

WEIGHING SOLUTIONS FOR ANY APPLICATION



Dini Argeo - Headquarters and Production Plant - Fiorano Modenese, Italy

DINI AR GEO is an Italian company specialising in the design and manufacture of scales and weighing systems that have established themselves on the world market for quality, reliability and versatility of use.

This catalogue is a comprehensive guide to Dini Argeo weight indicators. You will find information on specifications, features and benefits, as well as different options that can be adapted to your specific needs.

Weight indicators are essential for monitoring and recording weight measurements, ensuring quality and accuracy in various sectors such as industry, agriculture, trade and logistics.

Regardless of the sector, be it laboratory, transport or industrial production, this catalogue will help you choose reliable and innovative instruments to achieve high levels of precision and control in daily operations.



TABLE OF CONTENTS

INTRODUCTION

p. 4

How to choose the best weight indicator	4
Main factors to consider when choosing a weight indicator	6
Configurability vs programmability	8
Why choose Dini Argeo weight indicators	9

ADVANCED WEIGHT INDICATORS 3590 SERIES

p. 12

Comparison table, 3590 series	14
Weighing programs for 3590 series weight indicators	16
3590EGT HYGIENX®	18
3590ET	21
3590EGT	24
3590EGTT	27
3590ETKR	30
3590EGT3GD	33
3590EGT-IECEX3GD	36
3590ET8	39
3590EGT8	42
3590EGTB8	45
3590EGTBOX8	48
3590ET8D / 3590ETD	51
Options and accessories, 3590 series	54

MULTI-FUNCTION WEIGHT INDICATORS, DFW SERIES

p. 68

Comparison table, DFW series	70
DFWX	73
DFWX HYGIENX®	76
DFWXS	79
DFWK HYGIENX®	82
DFWL	85
DFWLB	88
DFWLI	91
DFWXP	94
DFWKRP	97
DFWDXT	100
DFWKXT	103
DFWIECEX2GD	106
DFWATEX2GD	109
DFWATEX2GDF	112
DFWIECEX3GD	115
DFWATEX3GD	118
DFWIECEX-BATCH1	121
Options and accessories, DFW series	124

INDUSTRIAL PCS, 6116 SERIES p. 146

Comparison table, weight repeaters	148
6116EVO	149
6116EVOBOX	152
Options and accessories, 6116 series	156

OTHER INSTRUMENTS: WEIGHT REPEATERS p. 160

Weight repeaters	162
GLR100	163
GLR100I	165
DGT100	167
DGT60	169
DGT603GD	171
DFWPM	173
Options and accessories, weight repeaters	176

OTHER INSTRUMENTS: WEIGHT TRANSMITTERS p. 184

Comparison table, weight transmitters	186
---------------------------------------	-----

PC SOFTWARE p. 188

MYRIAS®	190
DINITOOLS	195
DINI DISPLAY TOOL	196
XSPEED TOOL	197
WEIMONITOR	198
D-LEGAL	199
DBMANAGER	200

QUALITY AND CERTIFICATIONS p. 201

GENERAL CONDITIONS OF SALE AND WARRANTY p. 202

HOW TO CHOOSE THE BEST WEIGHT INDICATOR

Would you like to maximise the performance of your weighing electronics?

Are you looking for the ideal weight indicators for industrial scales?

Do you need customised software and control solutions?



Dini Argeo boasts a high standard of quality and powerful innovation, both in hardware and software.

These elements give us a leading position in the field of industrial weighing technology.





MAIN FACTORS TO CONSIDER WHEN CHOOSING A WEIGHT INDICATOR

Weight indicator environment

To choose the right weight indicator, it is crucial to consider the environment, taking into account variables such as **humidity**, **temperature** and possible **exposure to chemicals or dust**.

The Dini Argeo weight indicators have sturdy cases with **IP65**, **IP67**, **IP68** and **IP69K** rating and are **available with ATEX/IECEx approval** for hazardous areas 1, 21, 2 and 22. The integrated keypads and displays withstand cleaning agents.

In addition, Dini Argeo offers different installation modes: bench, column, panel or wall-mounted, with specific accessories for different positions.

Which scale should be connected to the weight indicator?

An important element in selecting a weight indicator is to check the **compatibility between the scale and the desired indicator**. Dini Argeo offers a range of products that can be used together, both in terms of physical connections and communication protocols, ensuring a stable and reliable connection between the devices.

Depending on the application, it may be necessary to connect one or more analogue or digital scales to a single weighing terminal.

Ease of use

A clear user interface and an intuitive display significantly simplify using the system.

It is essential that critical functions be easy to access, with clear status indications and tips given in the operator's language to ensure an improved operating experience.

The Dini Argeo weight indicators, designed by professionals in the sector, are constantly evolving and are constantly updated according to the user's needs.

Interface navigation, user experience, ease of use and clarity in communicating content are just some of the aspects our programmers focus on when programming the weight indicators.



Does the weight indicator meet all requirements of my application?

In the context of industrial applications, weight indicators often have to perform additional tasks in addition to measuring weight. For this reason, when selecting a weight indicator, **it is important to check the availability of specific software programs** needed for an application to ensure it is compatible with the indicator.

Dini Argeo's weight indicators offer a wide range of advanced software applications that can be fully customised to meet various needs, including data capture, piece counting, single- and multi-component dosing, vehicle weighing, production control and high-speed checkweighers.

Myrias is our new modular PC software, ideal for every application! Discover all its benefits on page 196.

Is the weighing system intended for use in commercial transactions?

When a scale is used for commercial transactions, legal purposes or tariffs, **it must be approved according to approval standards by a certified body**. In such cases, the choice of weight indicator is of importance, as it must comply with local laws and regulations.

This is particularly important for scales used in weight-based price calculation and the production of pre-packaged goods. The indicator must be classified as verifiable, which means that it must be accompanied by a type examination certificate specifically suited to the application in question.


Our weighing terminals comply with the requirements set out in the recommendations of the International Organization of Legal Metrology (OIML), which qualifies them as non-automatic weighing instruments, for dynamic vehicle low speed weigh-in-motion, for automatic weigh belt weighing, and for gravimetric filling machines.

Dini Argeo weighing systems are approved for use in legal metrology in several countries outside the European Union, including Australia, the United Kingdom and China.

Peripherals, integration and data transfer

Depending on the application, **it is essential to connect various peripherals to the weighing terminal** to facilitate data transfer and integration with other systems. Peripherals may include printers, labellers or weight repeaters. The terminal should support common industrial communication protocols and offer interfaces such as RS232, RS485, Ethernet TCP/IP and USB.

For fieldbuses, options include Profibus, Profinet, EtherNet IP, Modbus TCP and Canopen. For simpler applications, digital and analogue inputs/outputs, and wireless modules such as radio frequency, Wi-Fi or Wireless Personal Area Network (WPAN) are available.

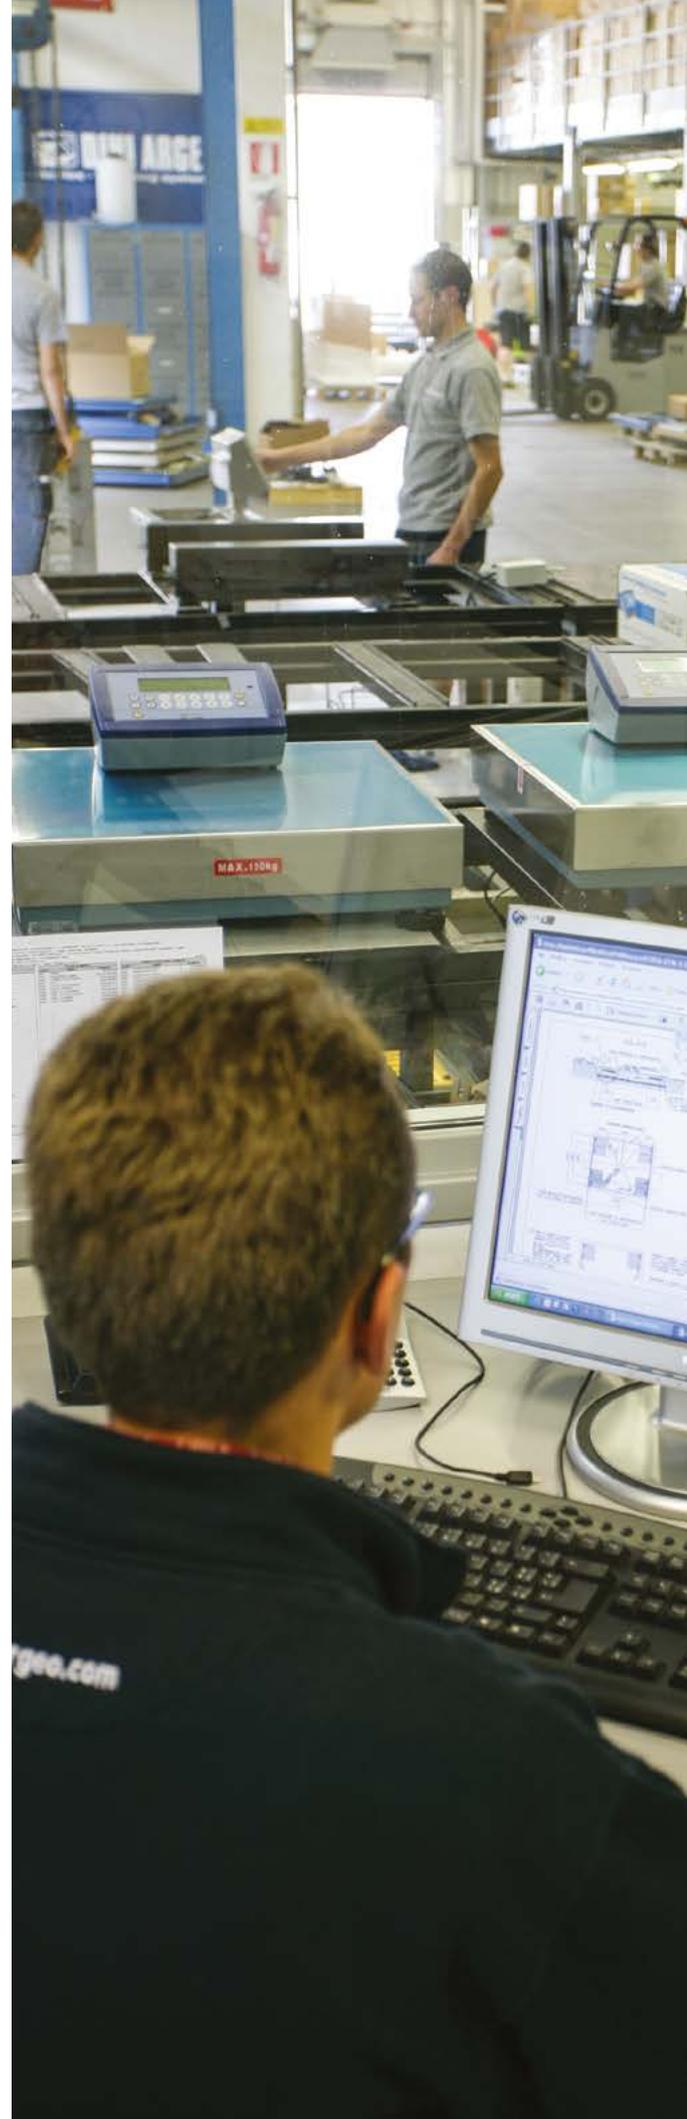

CONFIGURABILITY vs PROGRAMMABILITY

The configurability and programmability of a weight indicator are distinct concepts that refer to the indicator's ability to adapt or be customised to meet specific application needs or requirements.

Configurability refers to the ability to adjust the settings and functions of a weight indicator without requiring new code or software modification. Configurable weight indicators offer a wide range of options and settings that can be adjusted via menus, parameters or default settings.

All Dini Argeo weight indicators are configurable and allow the user to perform everything from simple common weighing operations to more complicated counting and dosing operations via special settings.

For applications with more complex needs, programmability is available.

The **programmability** of a weighing terminal indicates the ability to write, modify or customise code to make software that meets specific requirements. Programmable weight indicators allow developers to create customised applications using programming languages or software development tools. This custom programming may be necessary when the standard functions of the indicator are not enough to meet the needs of the application. The 3590 Touch Screen series weight indicators are programmable and allow the user to have the ideal instrument for their application.

Weighing terminals, also called industrial PCs, of the 6116 series are fully programmable through use in conjunction with our modular Myrias software. The choice between a configurable and a programmable indicator will depend on the specific needs of the application and the level of customisation required.

Dini Argeo offers both configurable and programmable weight indicators, suitable for any type of requirement.



WHY CHOOSE DINI ARGEO WEIGHT INDICATORS

Our weighing systems rely on over a century of experience.

Since 1846, Dini Argeo has played a leading role in the development and production of industrial weight indicators. Dini Argeo's ongoing commitment is to always be one step ahead in the world of weighing technology. Our customers can rely on us for state-of-the-art weighing solutions.

We specialise in the production of industrial weight indicators and dosing controllers, and develop weighing solutions tailored to the needs of scale manufacturers, system integrators and system builders.

We remain attentive to the market and this attention allows us to adapt the Dini Argeo scale, at both the hardware and software level, to meet the most varied and specific needs of our customers.



THE MAIN WEIGHING FUNCTIONS

WEIGHING AND WEIGHT TOTALISATION

This function can be combined with one or more bench or floor scales, creating a weighing and data management station capable of storing all the transactions executed, adding up several weights to calculate the total, issuing receipts and labels with all types of barcodes, and sending the reports to a PC via Ethernet or Wi-Fi.



WEIGHING AND DOSING

This function is designed to guide the operator in the creation of multi-component mixtures, both solid and liquid, to significantly reduce waste and calculation errors, thanks to clear messaging on the display and the out-of-tolerance dosage correction function.



WEIGHING AND PIECE-COUNTING

The counting function is designed for counting and warehouse management applications, indispensable for small parts packaging, inventories and stock monitoring. High precision and resolution of counting and in-line storage of items, each with average unit weight, pre-tare and quantity control thresholds.



CONTINUOUS WEIGHING ON CONVEYOR BELT

Configuration for integrating weighing on a conveyor belt with storage for the quantity of dosed material. Used in solid material handling systems where the control of the stock and volume of goods, both incoming and outgoing, is essential.



TOLERANCE CONTROL

Function used for managing package weighing systems on conveyor belts, by means of static or dynamic weighing and tolerance checking. Thanks to high-performance and advanced filtering functions, a high number of packages/min. can be weighed and stored.



FILLING IN LOADING

Configuration that enables dosing multiple products, in loading or unloading, mixing and formulation, with the possibility of managing mixers, burners or vibrators via dedicated contacts.



SAMPLE WEIGHING OF PRE-PACKAGED GOODS

Configuration for controlling pre-packaged goods of different weights, data management and printouts. The simultaneous control function of several production lines allows up to 10 controls of different items.



VEHICLE AXLE WEIGHT CONTROL

Modular configuration for axle-by-axle weighing of vehicles, both in static mode with the vehicle stationary and dynamic mode with the vehicle in motion. Axle weighing also has the goal of detecting overload on axles, avoiding penalties in the event of checks. Thanks to the entry/exit function, it is also possible to weigh the quantity of material unloaded or loaded and transmit all data to the company computer system.



MULTI-POINT WEIGHING

Portable, battery-operated modular configuration for creating wheel weighing stations, suitable for weighing any type of vehicle in a single operation and for multi-point weighing of objects. The carrying case weight indicator comes standard with a printer for weight receipts complete with all vehicle weight data, weight of each individual wheel, axle, vehicle total, gross, tare, net and centre of gravity.



APPLICATION FOR WEIGHBRIDGES ENTRY/EXIT VEHICLE WEIGHING

Modular configuration for the complete management of one or more vehicle weighbridges with printing of receipts, cards or bills on a continuous form. The entry/exit function makes it possible to monitor the quantity of material unloaded and loaded, and to share data with the company computer system.



INDUSTRIAL LABELLING/PRICING

Function that allows large quantities of packages to be labelled manually in a short time with indication of ingredients, traceability, packaging dates, expiry date and all types of barcodes.





PT W1

NET

34640

11:43
23/10/14

kg

TARE

15360

>0<

>T<

kg

PRODUCT

HYDRAULIC COLLECTORS

VEHICLE

B20 AUR

CUSTOMER

SMITH LTD



LOAD the SCALE and PRESS IN/OUT

DINI AR GEO
Scales - Weighing systems

3590EGT

WEIGHT INDICATORS

3590 SERIES

The Dini Argeo 3590 weight indicators with 5.7" or 8" touchscreen displays are ideal for customised and advanced applications. The various models series meet the weighing needs of advanced industrial, chemical-pharmaceutical and food industry settings, including settings with high hygiene standards or risk of explosion.

The 3590 series includes a wide choice of advanced programs and functions that can be configured to meet customised weighing needs, such as fully configurable databases and printouts, barcode management, RFID readers and badges, multi-language software, internal microSD slot for logos and images, customisable screens, step-by-step procedures and much more.

Thanks to the integrated development area, the 3590 indicators offer the opportunity to create fully custom applications to develop specific weighing systems. Depending on your requirements, you can therefore combine one of the following weighing programs with your own weight indicator, including weight totalisation, piece-counting, software for vehicle weighing systems, single- and multi-component dosing, statistical control of pre-packaged goods, industrial labelling and pricing, weighing of wheels and axles, weighbridges and tolerance control.

5.7" and 8" 3590 SERIES

TOUCHSCREEN

3590EGT
HYGIENX®3590ET /
3590ETD

3590EGT

		3590EGT HYGIENX®	3590ET / 3590ETD	3590EGT
PLUS	Choice of application software	●	●	●
	Fully customisable printouts and labels	●	●	●
	Customised program development environment	●	●	●
	Archives and registries	●	●	●
	Alibi memory	●	●	●
	Internal microSD slot for logos and images*	●	●	●
COMMUNICATION	RS232 serial ports	3	3	3
	RS485 serial port (replacing 1 x RS232 serial port)	○	○ / ●	○
	USB connection for PC	○	○ / -	○
	TCP/IP Ethernet	○	○	○
	Wi-Fi	○	○	○
	USB flash drive to save weighings	○	○	○
	Profibus / Modbus TCP / EtherCAT / DeviceNET / ProfiNET interfaces	○	○	○
	Wireless Personal Area Network (WPAN) interface	○	○	○
IN/OUT	Inputs	○ (x2)	○ (x2)	○ (x2)
	Outputs	○ (x4)	○ (x4)	○ (x4)
	Expansion with 6 inputs / 12 outputs	-	-	○
	Analogue output 0...10 V, 0...20 mA, 4...20 mA	○	○	○
HARDWARE	Colour touchscreen display	5.7"	5.7"	5.7"
	Mechanical keypad and light indicators	●	-	●
	Case	AISI 316 stainless steel	ABS	AISI 304 stainless steel
	IP rating	IP68 and IP69K	IP65 (IP40 with printer) / IP65	IP68
	Power supply	110-240 Vac	110-240 Vac	110-240 Vac
	Multi-language program	●	●	●
	Input for external keypad/barcode reader	○	●	●
	Adjustable tilt bracket	○	○	○
OIML	OIML features			
	Converter			
	Connectable scales			
	No. analogue load cells	16, 350 Ω 45, 1000 Ω	16, 350 Ω 45, 1000 Ω	16, 350 Ω 45, 1000 Ω
	No. digital load cells			
	OIML R76 / R51 - MID / R61 - MID / R134 approvals	●	●	●**

LEGEND: ● Standard ○ Optional - Not available

(1) 4 analogue scales + 1 remote scale, via serial.

(2) Only for vehicle weighing programs (AF03, AF08, AF09).

* MicroSD not included

** Both OIML R51 and R61



3590EGTT	3590ETKR	3590EGT3GD	3590EGT-IECEX3GD	3590EGT8	3590EGTB8	3590EGTBOX8	3590ET8 / 3590ET8D
●	●	●	●	●	●	-	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
3	3	3	3	3	3	3	3
○	○	●	●	○	○	○	○ / 1
○	○	○	-	○	○	○	○
○	○	○	○	●	●	●	●
○	○	○	○	○	-	-	○
○	○	○	○	○	○	○	○
○	-	○	○	○	○	○	○
○	○	-	○	○	○	○	○
● (x2)	○ (x2)	● (x2)	● (x2)	○ (x2)	○ (x2)	○ (x2)	○ (x2)
● (x4)	○ (x4)	● (x4)	● (x4)	○ (x4)	○ (x4)	○ (x4)	○ (x4)
○	-	○	○	8 inputs / 16 outputs	8 inputs / 16 outputs	8 inputs / 16 outputs	-
○	-	○	○	○	○	○	○
5.7"	5.7"	5.7"	5.7"	8"	8"	8"	8"
●	-	●	●	Light indicator only	-	-	-
AISI 304 stainless steel	ABS / Aluminium	AISI 304 stainless steel	AISI 304 stainless steel	AISI 304 stainless steel	AISI 304 stainless steel	AISI 304 stainless steel	ABS
IP68	IP40	IP68	IP68	IP68	IP65 (front)	-	IP65
110-240 Vac	With rechargeable battery	110-240 Vac	110-240 Vac or Max 12-24 Vdc 25.2W	110-240 Vac	12-24 Vdc	110-240 Vac	110-240 Vac
●	●	●	●	●	●	●	●
●	●	-	-	●	●	●	●
●	-	○	○	●	-	-	○
3.000e, 2x3.000e, 3x3.000e, 6.000e, 2x6.000e, 10.000e							
24 bit / 3200 Hz							
5(2)							
16, 350 Ω 45, 1000 Ω	16, 350 Ω 45, 1000 Ω	16, 350 Ω 45, 1000 Ω	16, 350 Ω 45, 1000 Ω	16, 350 Ω 45, 1000 Ω	16, 350 Ω 45, 1000 Ω	-	16, 350 Ω 45, 1000 Ω
16(3)							
●**	●	●	●**	●**	●**	●	●

3590 SERIES

WEIGHT INDICATORS

DRAW SERIES

INDUSTRIAL PCS
6116 SERIES

WEIGHT REPEATERS

OTHER INSTRUMENTS

WEIGHT TRANSMITTERS

PC SOFTWARE

WEIGHING PROGRAMS

FOR 3590 SERIES WEIGHT INDICATORS

The Dini Argeo weight indicators offer many functions, from the simplest to the most complex and dedicated, thanks to the weighing programs. One of the following software programs can be configured for each scale, which will facilitate the operator's work, to perform specific tasks.


Many programs to choose from and infinite options for customisation.

Over the years, Dini Argeo has developed a series of weighing programs for its advanced indicators, so that they can be perfectly suited to the application to create. These programs contain all the most advanced functions in the field of weighing and automated data management. Depending on users' needs, it is possible to match and fully customise one of the following software programs to their weight indicator.




AF01

Weight totalisation and formulation

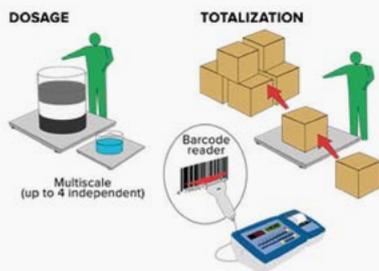


AF02

Weighing and piece-counting

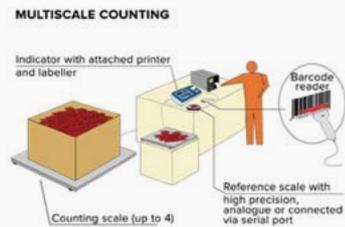


AF03 - ENTERPRISE

Simple weighing

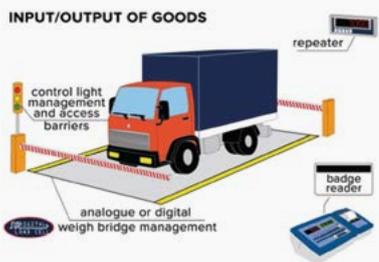


AF03GT - TOUCH

Simple weighing of trucks on weighbridges

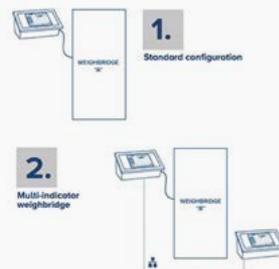

AF04 - ENTERPRISE

Sample weighing of pre-packaged goods

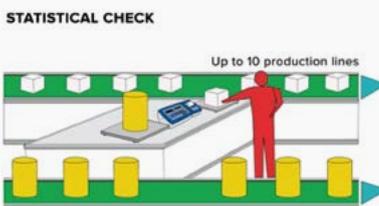

AF04 - TOUCH

Sample weighing of pre-packaged goods

NET		60.0		W1
+T+	g	Max=600.0g	d=0.1g	Min=2.0g
5	OK/4	OK/3	<TU1/2	OK/1
60.0 g	60.0 g	60.0 g	60.0 g	60.0 g
LINE	LOT	1	WEIGHS	000/030
OPERATOR	ARTICLE		STD. DEVIATION	0.0 g
TU2	TU1		AVERAGE WEIGHT	0.0 g
TU1	TARGET	58.8 g	<TU1	0
TO1	TU2	59.4 g	<TU	0
TO2	TU1	60.0 g	OK	0
TARE	TO1	60.6 g	>TO	0
	TO2	61.2 g	>TO1	0
		10.0 g	>TO2	0
LINE	OPERATOR	ARTICLE	PT	
START	CHECK	STOP	>>	
+0+	WAITING SAMPLE 001/030			+T+

WEIGHT INDICATORS | 3590 SERIES | WEIGHING PROGRAMS
 INDUSTRIAL PCS | 6116 SERIES | DFV SERIES | WEIGHT REPEATERS | WEIGHT TRANSMITTERS | OTHER INSTRUMENTS | PC SOFTWARE



AF05
Industrial labelling/pricing

INDUSTRIAL LABELLING / PRICE COMPUTING



AF08
Multi-point weighing

WHEEL WEIGHING SYSTEMS




AF09
Dynamic or static axle weighing on 1 or 2 platforms

DYNAMIC OR STATIC VEHICLE AXLE WEIGHING




BATCH1
Single-component dosing in loading and unloading

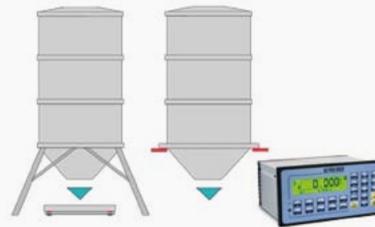


BATCH
Multi-component dosing in loading and unloading




BELT
Reading and adjusting capacity on conveyor belt

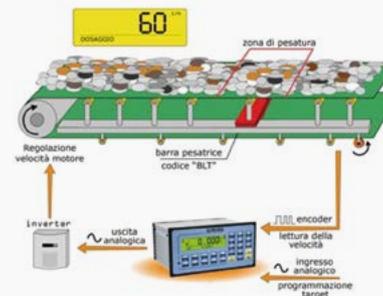

CHECK
Weighing packages on conveyor belt

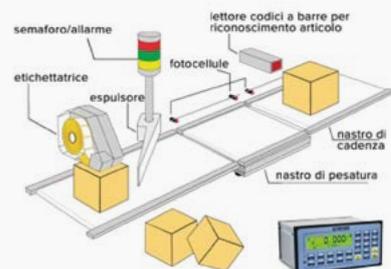

LW
Continuous dosing from silos, cisterns, hoppers

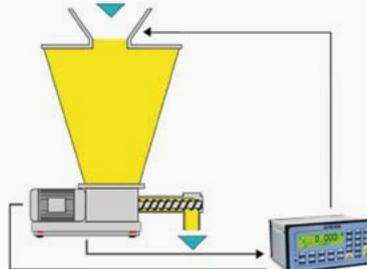

3590EGT HYGIENX®

5.7-INCH TOUCHSCREEN DISPLAY

Weight indicator with advanced weighing program, suitable for environments that require high hygiene standards and thorough cleaning with high temperature and pressure water jets. Featuring a 5.7" touchscreen display, it also stands out for its sturdiness, thanks to the AISI 316 stainless steel case. Our 3590 HYGIENX® ensures traceability, data entry, database, saving and wireless transmission of weights. The 3590EGT8 Weight Indicator is the ideal solution for maximum precision and versatility in industrial weighing.



HYGIENX®



Version codes

	DESCRIPTION	CODE	
	5.7" colour touchscreen indicator with AF01 program, specifically for environments with high hygiene requirements. Casing in AISI 316 stainless steel with IP68/IP69K rating.	3590EGT-HGX	

Why choose

- Clear view of data thanks to backlit 5.7" touchscreen display.
- AISI 316 stainless steel case with IP68 and IP69K protection rating.
- Supplied standard with 3 serial ports, data transmission communication protocols, fully configurable data entry and printouts, alibi memory as standard, and input for barcode/badge reader.
- The 3590EGT HYGIENX® indicator, in addition to your choice of weighing program, also includes a dedicated area for developing customised application programs.
- With fully customisable work screens, you can create an interface tailor-made for each application.
- Multi-language software, in Italian, English, German, French and Spanish. Option to enter your own translation, thanks to new "CUSTOM LANGUAGE TOOL" software program.
- CE-M certifiable (OIML R-76 / R-51 MID / EN 45501).

Main features

STANDARD APPLICATIONS:

- **AF01:** Totalisation and formulation

USER CUSTOMISABLE:

- Wizards, messages for the operator.
- Management of serial ports, customisation of communication protocols.
- Full management of digital I/O.
- Sequential or simultaneous automations.
- Tailor-made data entry, archives.

UPON REQUEST:

Dini Argeo also offers the program development service (upon request).

Technical features

Choice of application software	•
Fully customisable printouts and labels	•
Customised program development environment	•
Archives and registries	•
Alibi memory	•
Internal microSD slot for logos and images*	•
RS232 serial ports	3
RS485 serial port (replacing 1 x RS232 serial port)	○
USB connection for PC	○
TCP/IP Ethernet	○
Wi-Fi	○
USB flash drive to save weighings	○
Profibus / Modbus TCP / EtherCAT / DeviceNET / ProfiNET interfaces	○
Wireless Personal Area Network (WPAN) interface	○
Inputs	○x2
Outputs	○x4
Expansion with 6 inputs / 12 outputs	-
Analogue output 0...10 V, 0...20 mA, 4...20 mA	○
8" colour touchscreen display	•
Mechanical keypad and light indicators	•
Case	AISI 316 stainless steel
IP rating	IP68 and IP69K
Power supply	110-240 Vac
Multi-language program	•
Input for external keypad/barcode reader	○
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 2x6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	5 ⁽¹⁾
No. analogue load cells	16, 350 Ω 45, 1000 Ω
No. digital load cells	16 ⁽²⁾
OIML R76 / R51 - MID / R134 approvals	•

(1) 4 analogue scales + 1 remote scale, via serial.


(2) Only for vehicle weighing programs (AF03, AF08, AF09).

* MicroSD not included

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R134
- Australian Pattern Approval (NMI)

Technical drawing (mm)

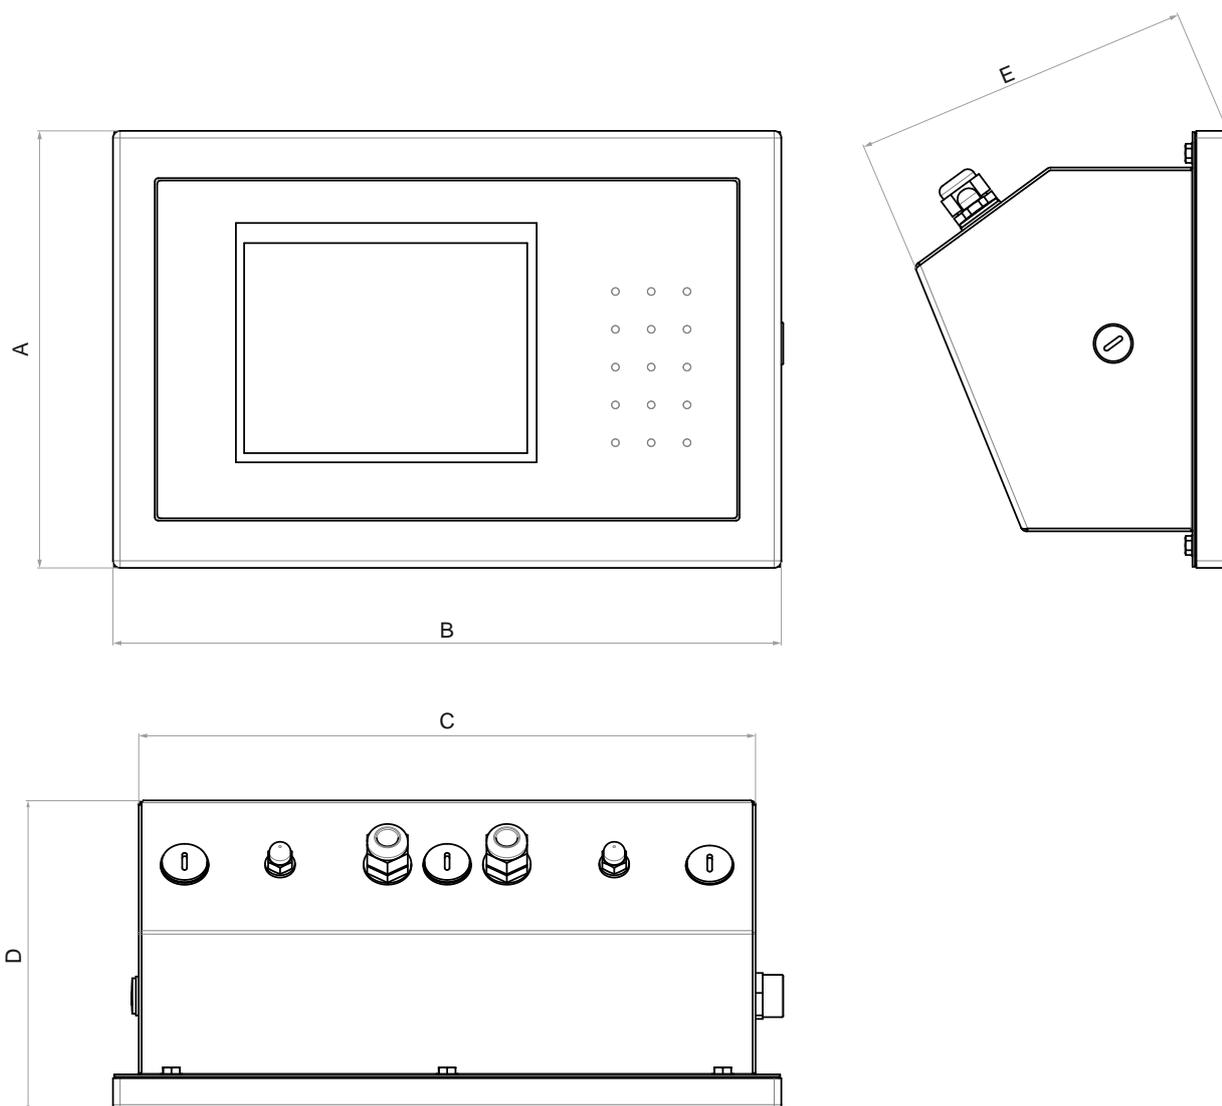

Dimensions

A	185 mm	D	132 mm
B	280 mm	E	143 mm
C	258 mm		

3590ET

5.7-INCH TOUCHSCREEN DISPLAY

3590ET weight indicator, with backlit 5.7" touchscreen display. Designed for advanced industrial applications, this instrument simplifies weighing operations, thanks to a clear display and the option to customise your screens as needed.



Version codes

	DESCRIPTION	CODE	
	Touchscreen indicator with AF01 program. Housing in ABS. Colour display.	3590ET	

Why choose

- 5.7" colour touchscreen display.
- Sturdy and waterproof case in ABS with IP65 protection rating.
- Supplied standard with 3 serial ports, Ethernet port, data transmission communication protocols, fully configurable printouts, integrated alibi memory, and input for barcode/badge reader.
- In addition to the weighing program of your choice, the 3590ET indicator offers a dedicated area for the development of specific application programs, an integrated debugger and PC programming tools.
- Thanks to fully customisable work screens, all necessary weighing data, registries and free texts can be managed quickly and intuitively, greatly simplifying user operations.
- Multi-language software, in Italian, English, German, French, Portuguese and Spanish. Option to enter your own translation, thanks to new "CUSTOM LANGUAGE TOOL" software program.
- The 3590ET weight indicator is CE-M certifiable (OIML R-76 / R-51 MID / EN 45501).

Main features

STANDARD APPLICATIONS:

- **AF01:** Totalisation and formulation

USER CUSTOMISABLE:

- Specific weighing programs according to client requirements
- Tailor-made weighing programs to replace pre-existing system terminals
- Wizards, messages for the operator
- Management of serial ports, customisation of protocols
- Full management of digital I/O
- Sequential or simultaneous automations
- Tailor-made data entry, archives

UPON REQUEST:

Dini Argeo also offers the program development service (upon request).

Technical features

Choice of application software	•
Fully customisable printouts and labels	•
Customised program development environment	•
Archives and registries	•
Alibi memory	•
Internal microSD slot for logos and images*	•
RS232 serial ports	3
RS485 serial port (replacing 1 x RS232 serial port)	○
USB connection for PC	○
TCP/IP Ethernet	○
Wi-Fi	○
USB flash drive to save weighings	○
Profibus / Modbus TCP / EtherCAT / DeviceNET / ProfiNET interfaces	○
Wireless Personal Area Network (WPAN) interface	○
Inputs	○ x2
Outputs	○ x4
Expansion with 6 inputs / 12 outputs	-
Analogue output 0...10 V, 0...20 mA, 4...20 mA	○
5.7" colour touchscreen display	•
Mechanical keypad and light indicators	-
Case	ABS
IP rating	IP65 (IP40 with printer)
Power supply	110-240 Vac
Multi-language program	•
Input for external keypad/barcode reader	•
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 2x6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	5 ⁽¹⁾
No. analogue load cells	16, 350 Ω 45, 1000 Ω
No. digital load cells	16 ⁽²⁾
OIML R76 / R51 - MID / R134 approvals	•

(1) 4 analogue scales + 1 remote scale, via serial.


(2) Only for vehicle weighing programs (AF03, AF08, AF09).

* MicroSD not included

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R134
- Australian Pattern Approval (NMI)

Technical drawing (mm)

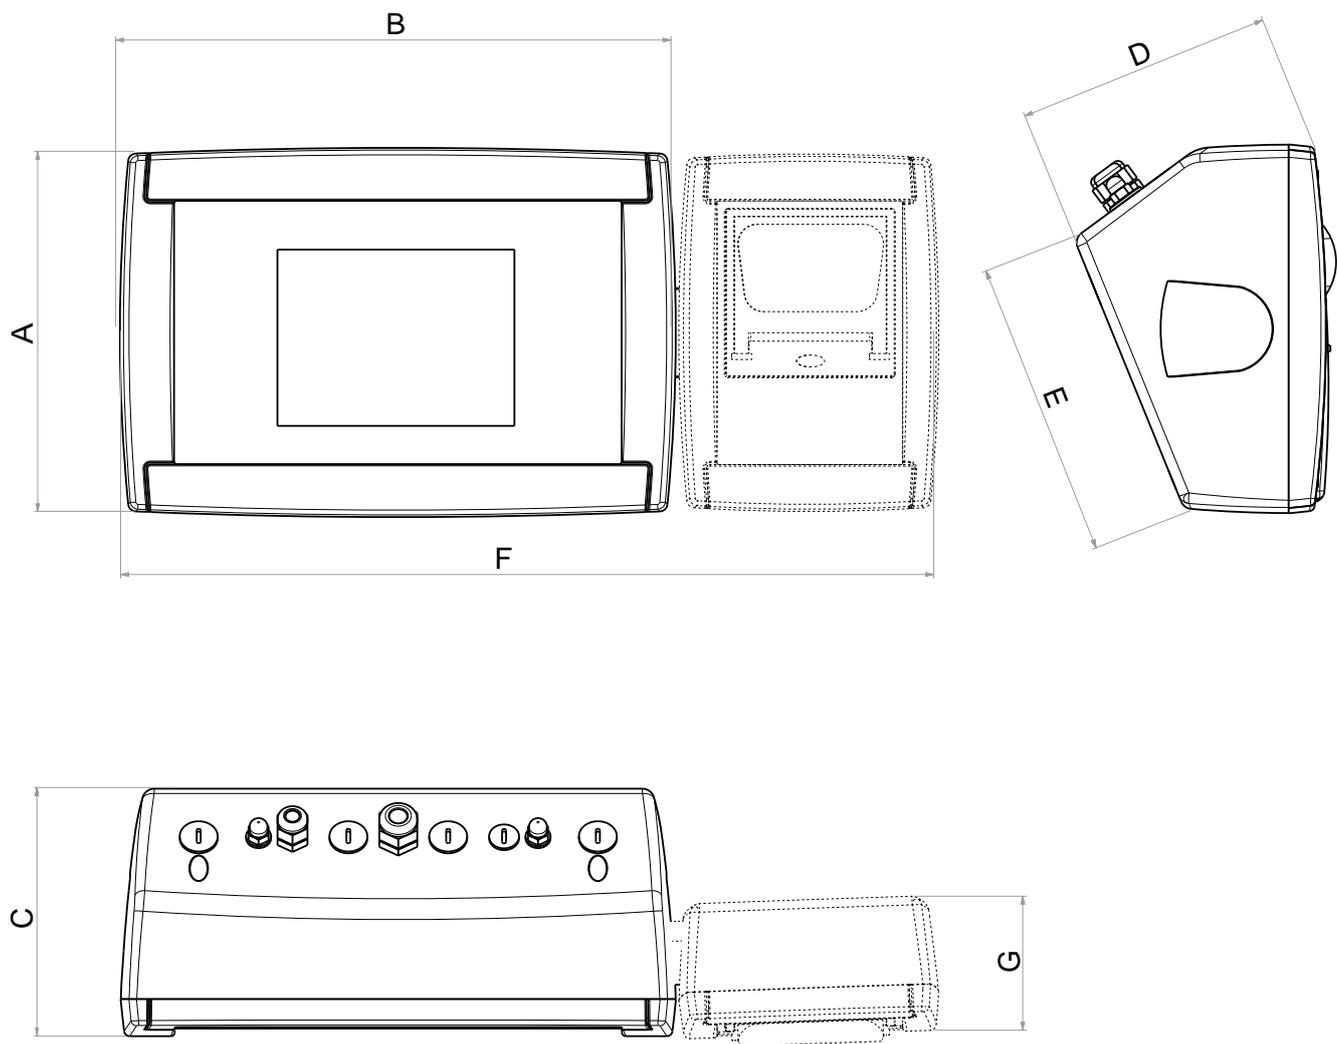

Dimensions			
A	184 mm	E	150 mm
B	278 mm	F	410 mm
C	120 mm	G	410 mm
D	128 mm		

3590EGT

5.7-INCH TOUCHSCREEN DISPLAY

Our 3590EGT digital weight indicator is the ideal solution for advanced industrial applications and digital weighbridges. Supplied with a large 5.7" touchscreen display, 3 serial ports, data transmission communication protocols, fully configurable printouts, integrated alibi memory, and input for barcode/badge reader.



OIML
APPROVED



IP68



STAINLESS
STEEL

Version codes

	DESCRIPTION	CODE	
	Colour touchscreen indicator with 2 IN, 4 OUT, RS485, AF01 program. Housing in IP68 stainless steel.	3590EGTCXT01BC	
	Colour touchscreen indicator with AF01 program. Housing in IP68 stainless steel.	3590EGT	
	Colour touchscreen indicator with AF01 program. Housing in IP68 stainless steel. Power cable with BS1363 plug (UK plug).	3590EGTUK	

Why choose

- Backlit 5.7" graphic touchscreen display.
- Case in IP68 AISI 304 stainless steel, and new optional IP69K rating.
- In addition to the weighing program of your choice, the 3590EGT indicator offers a dedicated area for the development of specific application programs, an integrated debugger, and PC programming tools.
- The 3590EGT weight indicator, with AF03GT program, manages the most common load cells for digital weighbridges.
- Multi-language software in Italian, English, German, French, Portuguese and Spanish. Option to enter your own translation, thanks to new "CUSTOM LANGUAGE TOOL" software program.
- The 3590EGT weight indicator is CE-M certifiable (OIML R-76 / R-51 MID / R-61 MID / EN 45501).

Main features

STANDARD APPLICATIONS:

- **AF01:** Totalisation and formulation

USER CUSTOMISABLE:

- Wizards, messages for the operator
- Management of serial ports, customisation of protocols
- Full management of digital I/O
- Sequential or simultaneous automations
- Tailor-made data entry, archives

UPON REQUEST:

Dini Argeo also offers the program development service (upon request).

Technical features

Choice of application software	•
Fully customisable printouts and labels	•
Customised program development environment	•
Archives and registries	•
Alibi memory	•
Internal microSD slot for logos and images*	•
RS232 serial ports	3
RS485 serial port (replacing 1 x RS232 serial port)	○
USB connection for PC	○
TCP/IP Ethernet	○
Wi-Fi	○
USB flash drive to save weighings	○
Profibus / Modbus TCP / EtherCAT / DeviceNET / ProfiNET interfaces	○
Wireless Personal Area Network (WPAN) interface	○
Inputs	○x2
Outputs	○x4
Expansion with 6 inputs / 12 outputs	○
Analogue output 0...10 V, 0...20 mA, 4...20 mA	○
5.7" colour touchscreen display	•
Mechanical keypad and light indicators	•
Case	AISI 304 stainless steel
IP rating	IP68
Power supply	110-240 Vac
Multi-language program	•
Input for external keypad/barcode reader	•
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 2x6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	5 ⁽¹⁾
No. analogue load cells	16, 350 Ω 45, 1000 Ω
No. digital load cells	16 ⁽²⁾
OIML R76 / R51 - MID / R61 - MID / R134 approvals	•

(1) 4 analogue scales + 1 remote scale, via serial.


(2) Only for vehicle weighing programs (AF03, AF08, AF09).

* MicroSD not included

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- OIML R134
- Australian Pattern Approval (NMI)

Technical drawing (mm)

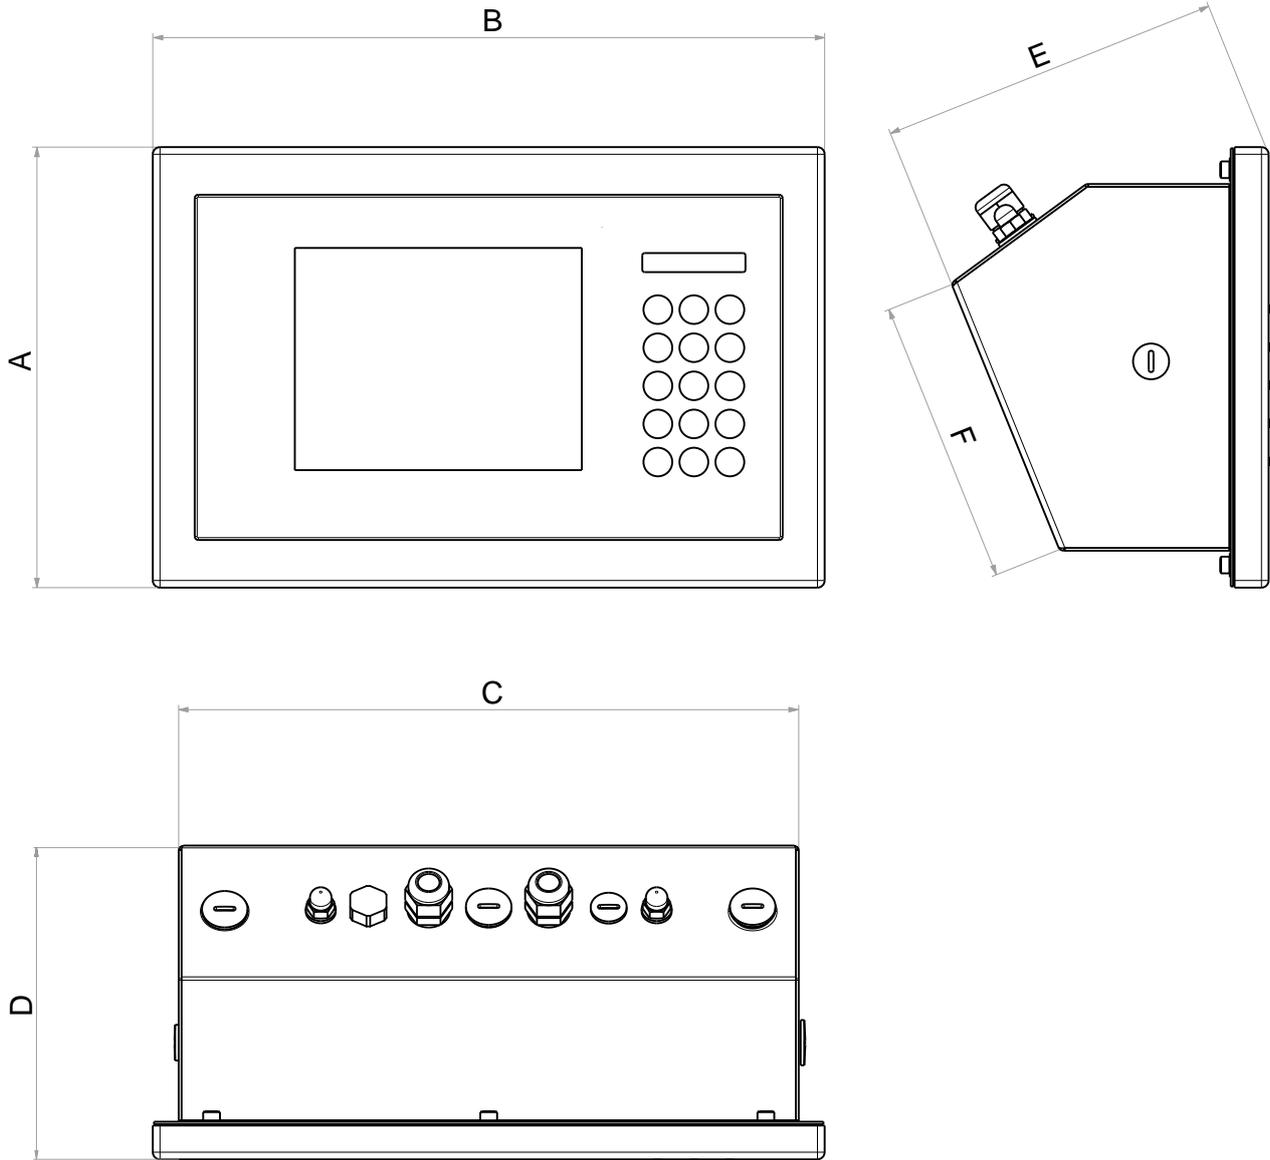

Dimensions			
A	185 mm	D	134 mm
B	280 mm	E	143 mm
C	258 mm	F	120 mm

3590EGTT

5.7-INCH TOUCHSCREEN DISPLAY

Our fully configurable 3590EGTT weight indicator with touchscreen display is ideal for advanced weighing systems. In addition to the weighing program of your choice, there is a dedicated area for developing specific application programs, integrated debugger, and PC programming tools.



Version codes

	DESCRIPTION	CODE	
	Touchscreen indicator with IP68 stainless steel housing. Version with adjustable tilt, bracket for installation on bench or wall. Standard AF01 program.	3590EGTT	

Why choose

- Backlit, graphic, resistive touchscreen colour 5.7” display.
- IP68, AISI 304 stainless steel bracket case.
- Development area for custom programs via specific programming language.
- Equipped with adjustable bracket as standard.
- Alibi memory as standard, integrated on the motherboard.
- With fully customisable work screens, you can create an interface tailor-made for each application.
- Multi-language software in Italian, English, German, French, Portuguese and Spanish. Option to enter your own translation thanks to new “CUSTOM LANGUAGE TOOL” software program.
- CE-M certifiable (OIML R-76 / R-51 MID / R-61 MID / EN 45501).

Main features

STANDARD APPLICATIONS:

- **AF01:** Totalisation and formulation

USER CUSTOMISABLE:

- Specific weighing programs according to client requirements
- Tailor-made weighing programs to replace pre-existing system terminals
- Wizards, messages for the operator
- Management of serial ports, customisation of protocols
- Full management of digital I/O
- Sequential or simultaneous automations
- Tailor-made data entry, archives

UPON REQUEST:

Dini Argeo also offers the program development service (upon request).

Technical features

Choice of application software	●
Fully customisable printouts and labels	●
Customised program development environment	●
Archives and registries	●
Alibi memory	●
Internal microSD slot for logos and images*	●
RS232 serial ports	3
RS485 serial port (replacing 1 x RS232 serial port)	○
USB connection for PC	○
TCP/IP Ethernet	○
Wi-Fi	○
USB flash drive to save weighings	○
Profibus / Modbus TCP / EtherCAT / DeviceNET / ProfiNET interfaces	○
Wireless Personal Area Network (WPAN) interface	○
Inputs	● x2
Outputs	● x4
Expansion with 6 inputs / 12 outputs	○
Analogue output 0...10 V, 0...20 mA, 4...20 mA	○
5.7" colour touchscreen display	●
Mechanical keypad and light indicators	●
Case	AISI 304 stainless steel
IP rating	IP68
Power supply	110-240 Vac
Multi-language program	●
Input for external keypad/barcode reader	●
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 2x6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	5 ⁽¹⁾
No. analogue load cells	16, 350 Ω 45, 1000 Ω
No. digital load cells	16 ⁽²⁾
OIML R76 / R51 - MID / R61 - MID / R134 approvals	●

(1) 4 analogue scales + 1 remote scale, via serial.


(2) Only for vehicle weighing programs (AF03, AF08, AF09).

* MicroSD not included

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- OIML R134
- Australian Pattern Approval (NMI)

Technical drawing (mm)

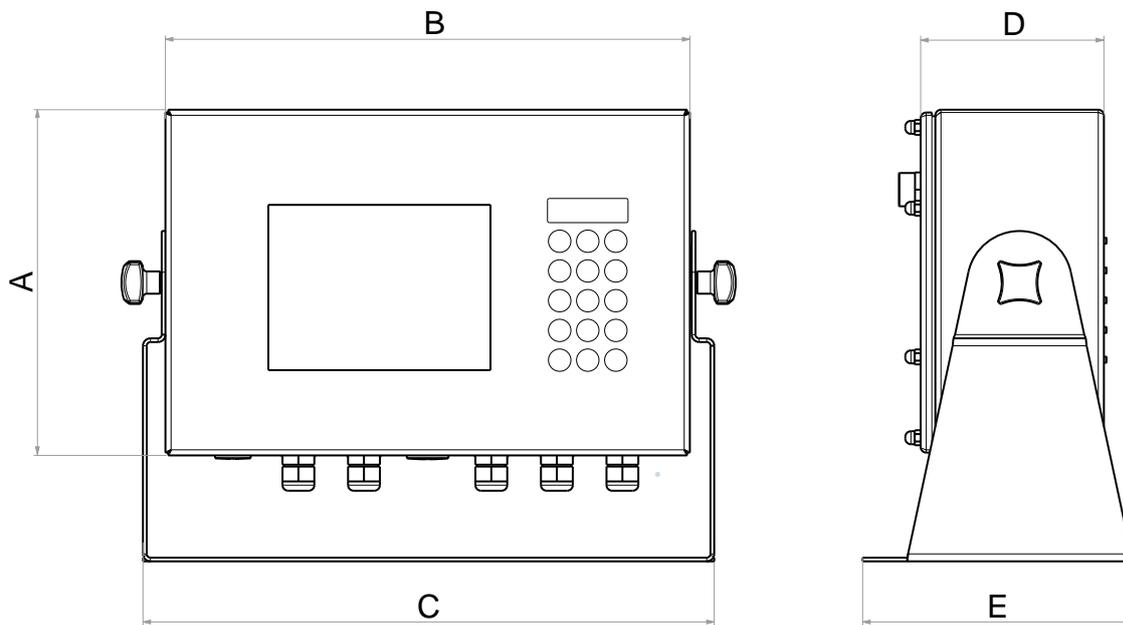

Dimensions			
A	186 mm	D	98 mm
B	280 mm	E	144 mm
C	306 mm		

3590ETKR

5.7-INCH TOUCHSCREEN DISPLAY

Our 3590ETKR digital weight indicator with 5.7" screen is ideal for multi-point weighing of vehicles, planes or objects. To simplify the user's work, it enables viewing all weighing data and customising screens. Additionally, our ETKR indicator features a carrying case in ABS, for easy transport and guaranteed protection.



OIML
APPROVED



ABS



CARRYING
CASE

Version codes

	DESCRIPTION	CODE	
	Only for analogue WWS (WWS...-y). Touchscreen indicator in carrying case, with printer and AF08 program. Colour display. Available only in combination with Dini Argeo vehicle weighing systems (WWS, RWS, DTW, WBSA series).	3590ETKR-3	
	Only for Radio-frequency WWS (WWS...2G4-y). Touchscreen indicator in carrying case, with printer and AF08 program. Colour display and radio module. Available only in combination with Dini Argeo vehicle weighing systems (WWS, RWS, DTW, WBSA series).	3590ETKR2G4-1	
	Only for analogue WWS (WWS...-y). Touchscreen indicator in carrying case, with printer and AF09 program. Colour display. Available only in combination with Dini Argeo axle weighing systems (WWS, RWS, series).	3590ETKR09-3	
	Only for Radio-frequency WWS (WWS...2G4-y). Touchscreen indicator in carrying case, with printer and AF09 program. Colour display and radio module. Available only in combination with Dini Argeo vehicle weighing systems (WWS, RWS, series).	3590ETKR2G4-AF09-1	

Why choose

- Backlit 5.7" touchscreen display for clear and quick data viewing.
- Case in ABS or aluminium with IP40 protection rating.
- With carrying case in ABS for easy transport, with housing for indicator and storage compartment.
- Supplied standard with 3 serial ports, alibi memory and thermal printer.
- In addition to the weighing program of your choice, the 3590ETKR indicator offers a dedicated area for the development of specific application programs, an integrated debugger and PC programming tools.
- Thanks to fully customisable work screens, all necessary weighing data, registries and free texts can be managed quickly and efficiently.
- Multi-language software in Italian, English, German, French, Portuguese and Spanish. Option to enter your own translation, thanks to new "CUSTOM LANGUAGE TOOL" software program.
- CE-M certifiable (OIML R-76 / R-51 MID / EN 45501).

Main features

USER CUSTOMISABLE:

- Wizards, messages for the operator
- Management of serial ports, customisation of protocols
- Full management of digital I/O
- Sequential or simultaneous automations
- Tailor-made data entry, archives

UPON REQUEST:

Dini Argeo also offers the program development service (upon request).

Technical features

Choice of application software	•
Fully customisable printouts and labels	•
Customised program development environment	•
Archives and registries	•
Alibi memory	•
Internal microSD slot for logos and images*	•
RS232 serial ports	3
RS485 serial port (replacing 1 x RS232 serial port)	○
USB connection for PC	○
TCP/IP Ethernet	○
Wi-Fi	○
USB flash drive to save weighings	○
Profibus / Modbus TCP / EtherCAT / DeviceNET / ProfiNET interfaces	-
Wireless Personal Area Network (WPAN) interface	○
Inputs	○x2
Outputs	○x4
Expansion with 6 inputs / 12 outputs	-
Analogue output 0...10 V, 0...20 mA, 4...20 mA	-
5.7" colour touchscreen display	•
Mechanical keypad and light indicators	-
Case	ABS / ALUMINIUM
IP rating	IP40
Power supply	With rechargeable battery
Multi-language program	•
Input for external keypad/barcode reader	•
Adjustable tilt bracket	-
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 2x6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	5 ⁽¹⁾
No. analogue load cells	16, 350 Ω 45, 1000 Ω
No. digital load cells	16 ⁽²⁾
OIML R76 / R51 - MID / R134 approvals	•

(1) 4 analogue scales + 1 remote scale, via serial.


(2) Only for vehicle weighing programs (AF03, AF08, AF09).

* MicroSD not included

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R134
- Australian Pattern Approval (NMI)

Technical drawing (mm)

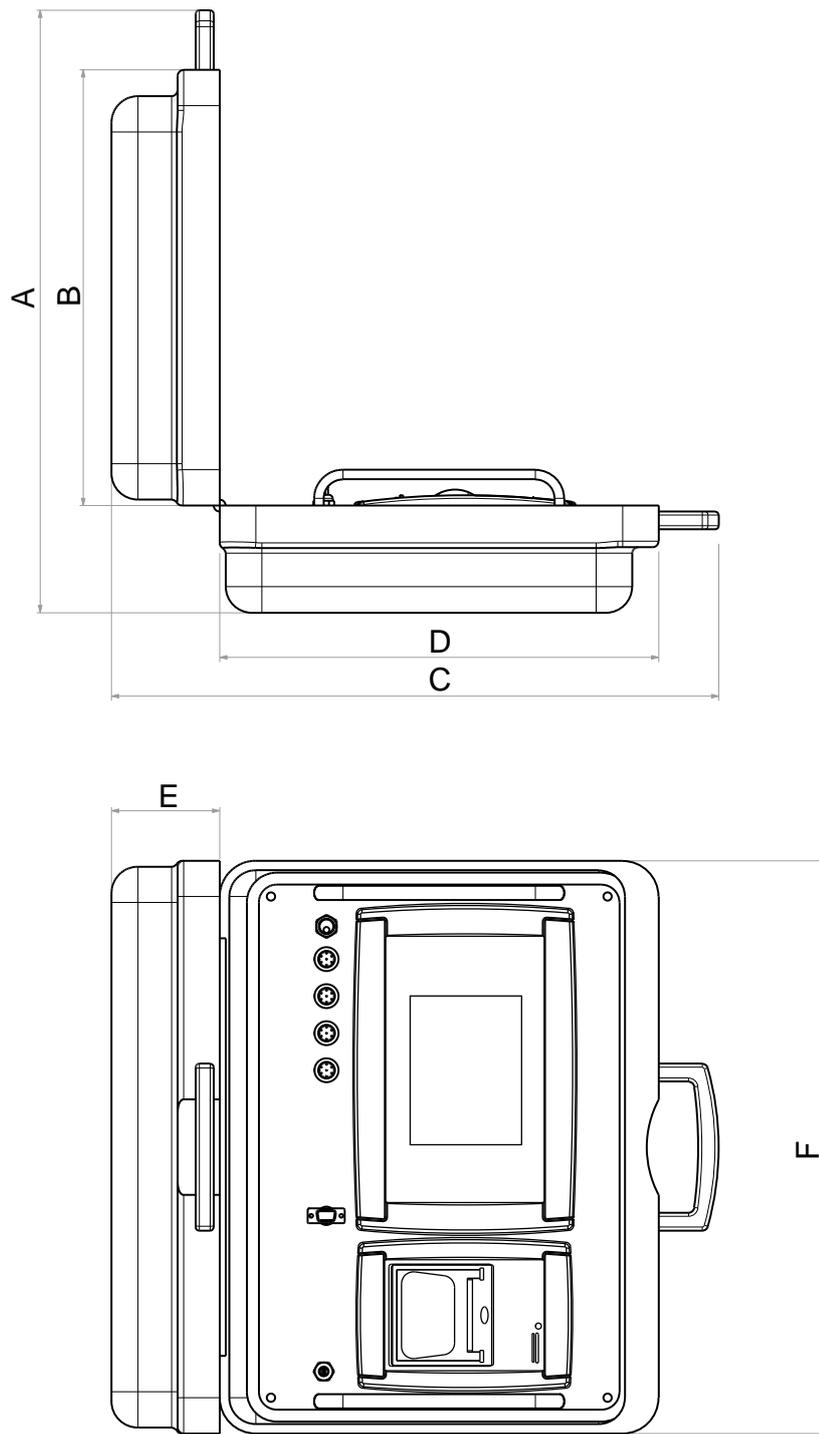

Dimensions

A	505 mm	D	365 mm
B	365 mm	E	90 mm
C	505 mm	F	480 mm

3590EGT3GD

5.7-INCH TOUCHSCREEN DISPLAY

Weight indicator designed for zones classified at risk of explosion, ATEX 2 and 22, with large display for easy viewing of weight, and waterproof, sturdy case in stainless steel with IP68 protection rating. With 3 serial ports, integrated alibi memory and fully configurable printouts.



Version codes

	DESCRIPTION	CODE	
	Colour touchscreen ATEX 3GD indicator with AF01 program. Housing in IP68 stainless steel. Protection: ATEX II 3G Ex nR IIB T6 Gc X for gas, and ATEX II 3D Ex tc IIIC T85°C Dc IP68 X for dust. Includes printout of safety instructions and ATEX EU Declaration of Conformity (EN, DE, FR, ES and IT).	3590EGTC3GD	

Why choose

- 5.7-inch colour touchscreen display.
- Sturdy and waterproof case in stainless steel, with IP68 protection rating.
- Supplied standard with 3 serial ports, data transmission communication protocols, fully configurable printouts, integrated alibi memory and input for barcode/badge reader.
- Multi-language software in Italian, English, German, French, Portuguese and Spanish.
- ATEX / IECEx.
- Thanks to fully customisable work screens, all necessary weighing data, registries and free texts can be managed quickly and intuitively, greatly simplifying user operations.
- The 3590EGT3GD weight indicator is CE-M certifiable (OIML R-76 / R-51 MID / EN 45501).

Main features

STANDARD APPLICATIONS:

- **AF01:** Totalisation and formulation

Technical features

Choice of application software	•
Fully customisable printouts and labels	•
Customised program development environment	•
Archives and registries	•
Alibi memory	•
Internal microSD slot for logos and images*	•
RS232 serial ports	3
RS485 serial port (replacing 1 x RS232 serial port)	•
USB connection for PC	○
TCP/IP Ethernet	○
Wi-Fi	○
USB flash drive to save weighings	○
Profibus / Modbus TCP / EtherCAT / DeviceNET / ProfiNET interfaces	○
Wireless Personal Area Network (WPAN) interface	-
Inputs	● x2
Outputs	● x4
Expansion with 6 inputs / 12 outputs	○
Analogue output 0...10 V, 0...20 mA, 4...20 mA	○
5.7" colour touchscreen display	•
Mechanical keypad and light indicators	•
Case	AISI 304 stainless steel
IP rating	IP68
Power supply	110-240 Vac
Multi-language program	•
Input for external keypad/barcode reader	-
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 2x6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	5 ⁽¹⁾
No. analogue load cells	16, 350 Ω 45, 1000 Ω
No. digital load cells	16 ⁽²⁾
OIML R76 / R51 - MID / R134 approvals	•

(1) 4 analogue scales + 1 remote scale, via serial.


(2) Only for vehicle weighing programs (AF03, AF08, AF09).

* MicroSD not included

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R134
- Australian Pattern Approval (NMI)

Technical drawing (mm)

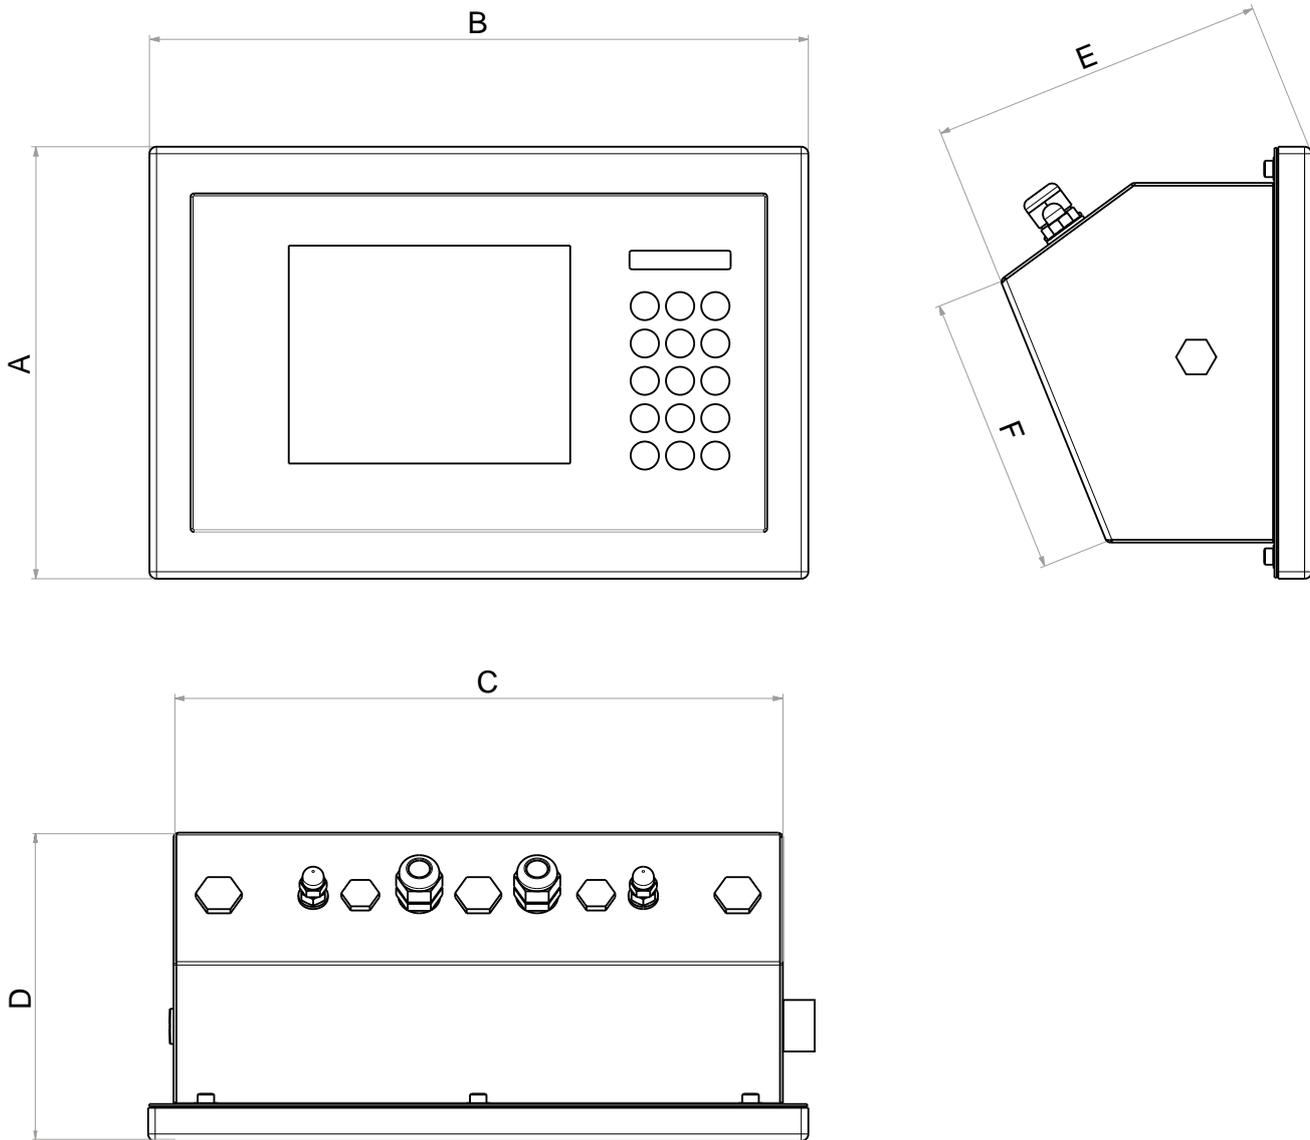

Dimensions			
A	185 mm	D	134 mm
B	280 mm	E	143 mm
C	258 mm	F	120 mm

3590EGT-IECEX3GD

5.7-INCH TOUCHSCREEN DISPLAY

Our 3590EGT-IECEX3GD weight indicator is ideal for advanced industrial applications and is suitable for zones classified at risk of explosion, Ex 2 and 22. Easy to wash, thanks to case closed without front screws.



OIML
APPROVED



IP68



STAINLESS
STEEL



ATEX

Version codes

	DESCRIPTION	CODE	
	Colour touchscreen Ex indicator for zone 2/22 with AF01 program. Housing in IP68 stainless steel. Marking: ATEX/IECEX II 3G Ex nR IIC T6 Gc X (0°C<= Ta <=50°C) for gas, and II 3D Ex tc IIIC T85°C Dc IP65 X (0°C<= Ta <=50°C) for dust. Includes printout of safety instructions and ATEX EU Declaration of Conformity (EN, DE, FR, ES and IT).	3590EGT-IECEX3GD	
	Colour touchscreen Ex indicator for zone 2/22 with AF01 program, that can be directly connected to load cells installed in zone 1/21 and 0/20. Housing in IP68 stainless steel. Marking: ATEX/IECEX II 3G Ex nR [ia] IIC T6 Gc X (0°C<= Ta <=50°C) for gas, and II 3D Ex tc [ia] IIIC T85°C Dc IP65 X (0°C<= Ta <=50°C) for dust. Includes printout of safety instructions and ATEX EU Declaration of Conformity (EN, DE, FR, ES and IT).	3590EGT-IECEX3GDZB	

Why choose

- Clear data viewing thanks to 5.7" colour touchscreen display.
- Waterproof case in stainless steel, with IP68 protection rating.
- Fitted standard with 3 serial ports, integrated alibi memory, and fully configurable printouts.
- Calendar clock and permanent data storage.
- The 3590EGT-IECEX3GD indicator, in addition to your choice of weighing program, also includes a dedicated area for developing customised application programs.
- Multi-language software in Italian, English, German, French, Portuguese and Spanish. Option to enter your own translation thanks to new "CUSTOM LANGUAGE TOOL" software program.
- CE-M certifiable (OIML R-76 / R-51 MID / R-61 MID / EN 45501).

Main features

STANDARD APPLICATIONS:

- **AF01:** Totalisation and formulation

USER CUSTOMISABLE:

- Specific weighing programs according to client requirements
- Tailor-made weighing programs to replace pre-existing system terminals
- Wizards, messages for the operator
- Management of serial ports, customisation of protocols
- Full management of digital I/O
- Sequential or simultaneous automations
- Tailor-made data entry, archives

UPON REQUEST:

Dini Argeo also offers the program development service (upon request).

Technical features

Choice of application software	●
Fully customisable printouts and labels	●
Customised program development environment	●
Archives and registries	●
Alibi memory	●
Internal microSD slot for logos and images*	●
RS232 serial ports	3
RS485 serial port (replacing 1 x RS232 serial port)	●
USB connection for PC	-
TCP/IP Ethernet	○
Wi-Fi	○
USB flash drive to save weighings	○
Profibus / Modbus TCP / EtherCAT / DeviceNET / ProfiNET interfaces	○
Wireless Personal Area Network (WPAN) interface	○
Inputs	●x2
Outputs	●x4
Expansion with 6 inputs / 12 outputs	○
Analogue output 0...10 V, 0...20 mA, 4...20 mA	○
5.7" colour touchscreen display	●
Mechanical keypad and light indicators	●
Case	AISI 316 stainless steel
IP rating	IP68
Power supply	110-240 Vac or Max 12-24 Vdc 25.2W
Multi-language program	●
Input for external keypad/barcode reader	-
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 2x6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	5 ⁽¹⁾
No. analogue load cells	16, 350 Ω 45, 1000 Ω
No. digital load cells	16 ⁽²⁾
OIML R76 / R51 - MID / R61 - MID / R134 approvals	●

(1) 4 analogue scales + 1 remote scale, via serial.


(2) Only for vehicle weighing programs (AF03, AF08, AF09).

* MicroSD not included

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R134
- EN/IEC 60079-0
- EN/IEC 60079-11 (version ZB)
- EN/IEC 60079-15
- OIML R61 - MID
- ATEX / IECEx
- EN/IEC 60079-31
- Australian Pattern Approval (NMI)
- Certified according to ATEX Directive 2014/34/EU and complying with the IECEx scheme, group II category 3GD according to standards EN/IEC 60079-0, EN/IEC 60079-11, EN/IEC 60079-15, EN/IEC 60079-31

Technical drawing (mm)

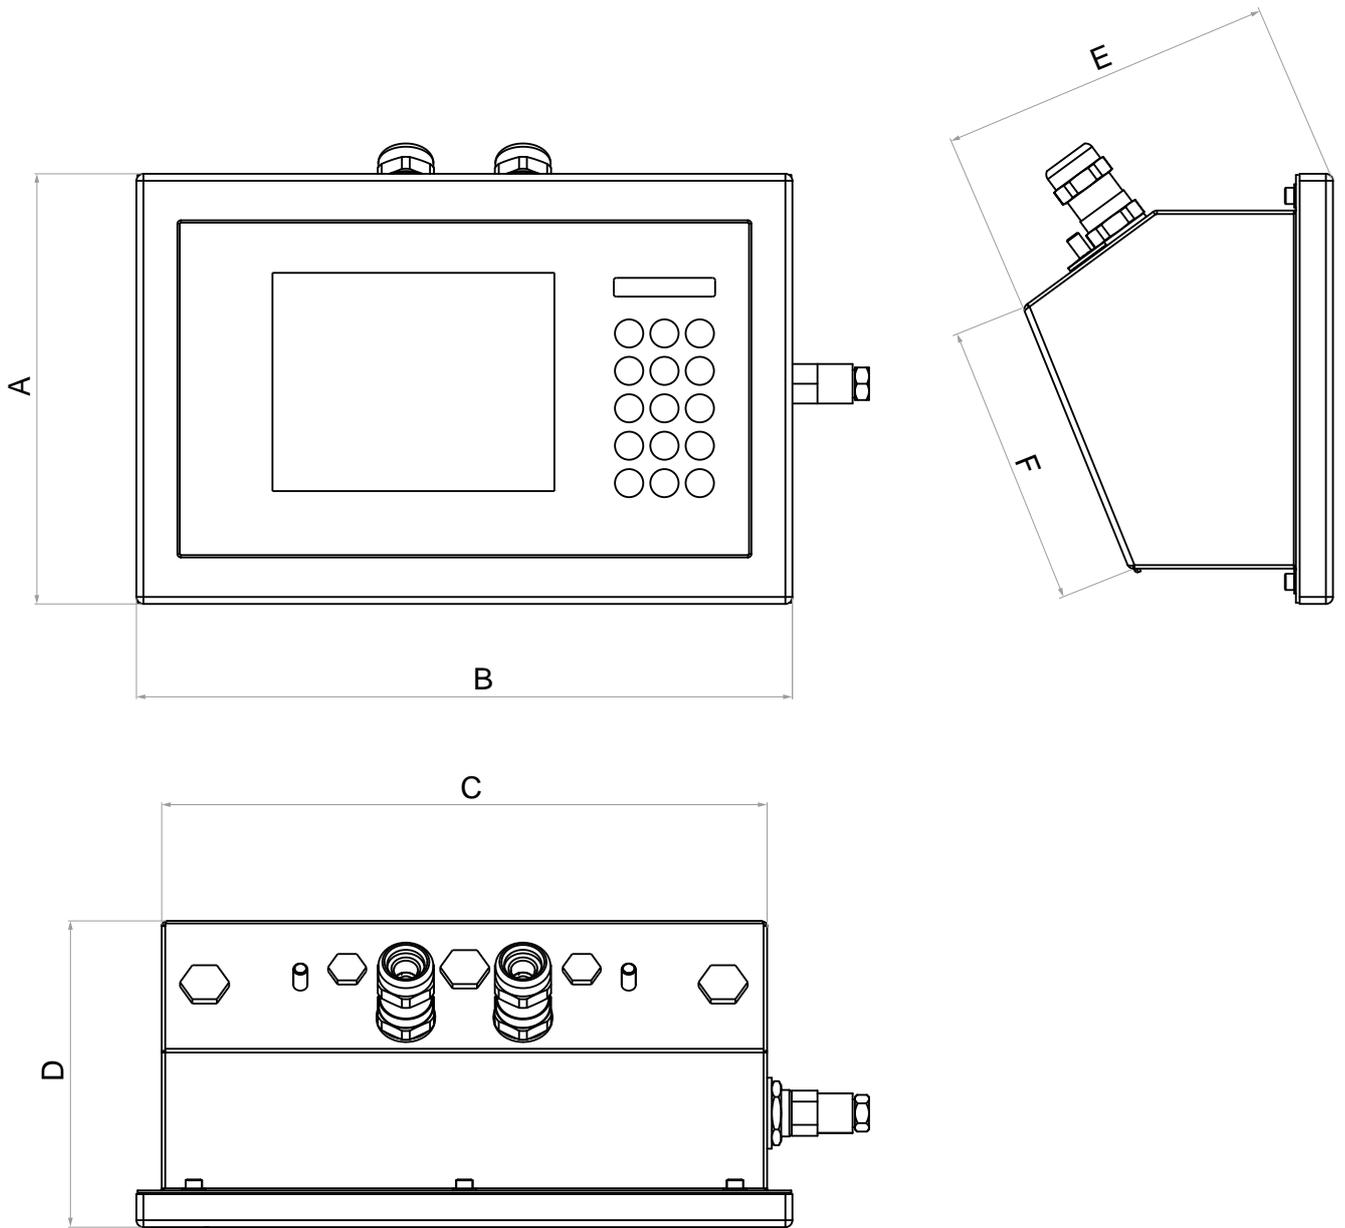

Dimensions

A	185 mm	D	132 mm
B	280 mm	E	143 mm
C	258.4 mm	F	120 mm

3590ET8

8-INCH TOUCHSCREEN DISPLAY

3590ET8 weight indicator, with large 8" touchscreen display. Perfect for advanced industrial applications, this instrument simplifies weighing operations, thanks to a clear display and the option to customise your screens as needed.



Version codes

	DESCRIPTION	CODE	
	8" touchscreen indicator with AF01 program. Housing in ABS. Colour display. Internal Ethernet port as standard.	3590ET8-1	
	8" touchscreen indicator with AF01 program. Housing in ABS. Colour display. Internal Ethernet port as standard. Power cable with BS1363 plug (UK plug).	3590ET8UK-1	

Why choose

- 8-inch colour touchscreen display.
- Sturdy, safe and waterproof case in ABS, with IP65 protection rating.
- Supplied standard with 3 serial ports, Ethernet port, data transmission communication protocols, fully configurable printouts, integrated alibi memory and input for barcode/badge reader.
- In addition to the weighing program of your choice, the 3590ET8 indicator offers a dedicated area for the development of specific application programs, an integrated debugger, and PC programming tools.
- Thanks to fully customisable work screens, all necessary weighing data, registries and free texts can be managed quickly and intuitively, greatly simplifying user operations.
- Multi-language software in Italian, English, German, French, Portuguese and Spanish. Option to enter your own translation thanks to new "CUSTOM LANGUAGE TOOL" software program.
- The 3590ET8 weight indicator is CE-M certifiable (OIML R-76 / R-51 MID / EN 45501).

Main features

STANDARD APPLICATIONS:

- **AF01:** Totalisation and formulation

USER CUSTOMISABLE:

- Specific weighing programs according to client requirements
- Tailor-made weighing programs to replace pre-existing system terminals
- Wizards, messages for the operator
- Management of serial ports, customisation of protocols
- Full management of digital I/O
- Sequential or simultaneous automations
- Tailor-made data entry, archives

UPON REQUEST:

Dini Argeo also offers the program development service (upon request).

Technical features

Choice of application software	●
Fully customisable printouts and labels	●
Customised program development environment	●
Archives and registries	●
Alibi memory	●
Internal microSD slot for logos and images*	●
RS232 serial ports	3
RS485 serial port (replacing 1 x RS232 serial port)	○
USB connection for PC	○
TCP/IP Ethernet	●
Wi-Fi	○
USB flash drive to save weighings	○
Profibus / Modbus TCP / EtherCAT / DeviceNET / ProfiNET interfaces	○
Wireless Personal Area Network (WPAN) interface	○
Inputs	○x2
Outputs	○x4
Expansion with 6 inputs / 12 outputs	-
Analogue output 0...10 V, 0...20 mA, 4...20 mA	○
8" colour touchscreen display	●
Mechanical keypad and light indicators	-
Case	ABS
IP rating	IP65
Power supply	110-240 Vac
Multi-language program	●
Input for external keypad/barcode reader	●
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 2x6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	5 ⁽¹⁾
No. analogue load cells	16, 350 Ω 45, 1000 Ω
No. digital load cells	16 ⁽²⁾
OIML R76 / R51 - MID / R134 approvals	●

(1) 4 analogue scales + 1 remote scale, via serial.




(2) Only for vehicle weighing programs (AF03, AF08, AF09).

* MicroSD not included

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R134
- Australian Pattern Approval (NMI)

Technical drawing (mm)

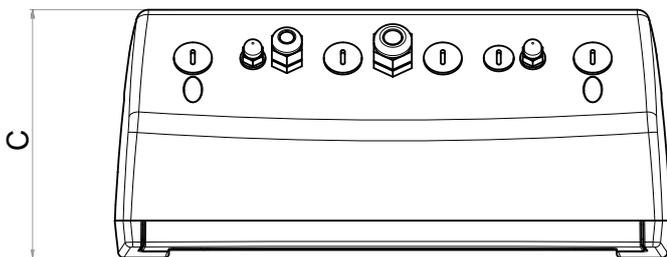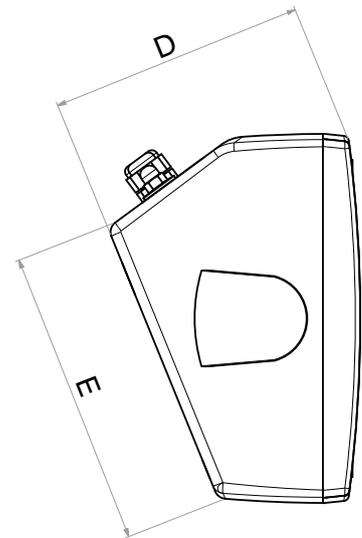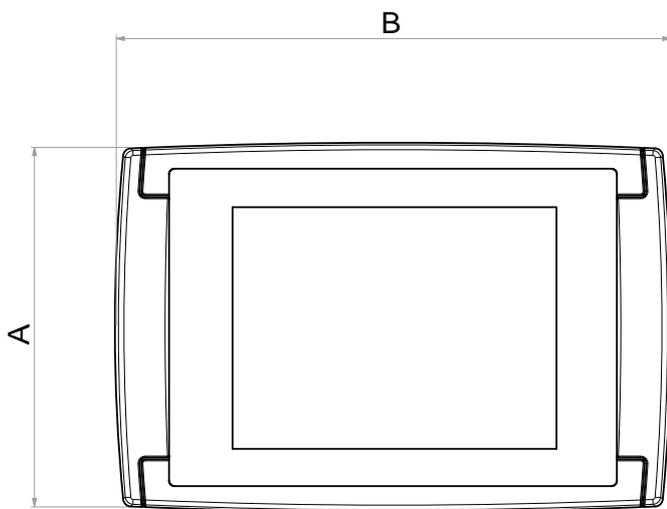

Dimensions			
A	184 mm	D	128 mm
B	278 mm	E	150 mm
C	120 mm		

3590EGT8

8-INCH TOUCHSCREEN DISPLAY

The 3590EGT8 Weight Indicator is the ideal solution for maximum precision and versatility in industrial weighing. This advanced instrument is designed to optimise weighing processes, offering a state-of-the-art range of functions.



OIML
APPROVED



IP68



STAINLESS
STEEL



UNIVERSAL
BRACKET



WEBSERVER



Version codes

	DESCRIPTION	CODE	
	8-inch touchscreen indicator with IP68 stainless steel housing. Version with adjustable tilt, bracket for installation on bench or wall. Internal Ethernet port as standard. Standard AF01 program. Power cable with BS1363 EU plug.	3590EGT8-1	
	8-inch touchscreen indicator with IP68 stainless steel housing. Version with adjustable tilt, bracket for installation on bench or wall. Internal Ethernet port as standard. Standard AF01 program. Power cable with BS1363 plug (UK plug).	3590EGT8UK-1	

Why choose

- Excellent data viewing thanks to 8-inch colour touchscreen display.
- Stainless steel case with IP68 protection rating to ensure high protection against external agents. Adjustable tilt for a clear view, thanks to support bracket as standard.
- Integrated, high-brightness, Dot LED control light for instant visual cues on weighing status.
- Advanced connectivity with Ethernet port as standard, to readily connect the indicator to the company network, for easy control and management.
- In addition to the weighing program of your choice, the 3590EGT8 indicator offers a dedicated area for the development of specific application programs, an integrated debugger and PC programming tools.
- Thanks to fully customisable work screens, all necessary weighing data, registries and free texts can be managed quickly and intuitively, greatly simplifying user operations.
- Multi-language software in Italian, English, German, French, Portuguese and Spanish. Option to enter your own translation thanks to new "CUSTOM LANGUAGE TOOL" software program.
- The 3590EGT8 weight indicator is CE-M certifiable (OIML R-76 / R-51 MID / R-61 MID / EN 45501).

Main features

STANDARD APPLICATIONS:

- **AF01:** Totalisation and formulation

USER CUSTOMISABLE:

- Specific weighing programs according to client requirements
- Tailor-made weighing programs to replace pre-existing system terminals
- Wizards, messages for the operator
- Management of serial ports, customisation of protocols
- Full management of digital I/O
- Sequential or simultaneous automations
- Tailor-made data entry, archives

UPON REQUEST:

Dini Argeo also offers the program development service (upon request).

Technical features

Choice of application software	•
Fully customisable printouts and labels	•
Customised program development environment	•
Archives and registries	•
Alibi memory	•
Internal microSD slot for logos and images	○
RS232 serial ports	3
RS485 serial port (replacing 1 x RS232 serial port)	1
USB connection for PC	○
TCP/IP Ethernet	•
Wi-Fi	-
USB flash drive to save weighings	○
Profibus / Modbus TCP / EtherCAT / DeviceNET / ProfiNET interfaces	○
Wireless Personal Area Network (WPAN) interface	○
Inputs	3
Outputs	4
Expansion with 6 inputs / 12 outputs	8 inputs / 16 outputs
Analogue output 0...10 V, 0...20 mA, 4...20 mA	-
8" colour touchscreen display	•
Mechanical keypad and light indicators	-
Case	STAINLESS STEEL
IP rating	IP68
Power supply	110-240 Vac
Multi-language program	•
Input for external keypad/barcode reader	○
Adjustable tilt bracket	•
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 2x6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	5 ⁽¹⁾
No. analogue load cells	16, 350 Ω 45, 1000 Ω
No. digital load cells	16 ⁽²⁾
OIML R76 / R51 - MID / R61 - MID / R134 approvals	•


(1) 4 analogue scales + 1 remote scale, via serial.

(2) Only for vehicle weighing programs (AF03, AF08, AF09).

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- OIML R134
- Australian Pattern Approval (NMI)

Technical drawing (mm)

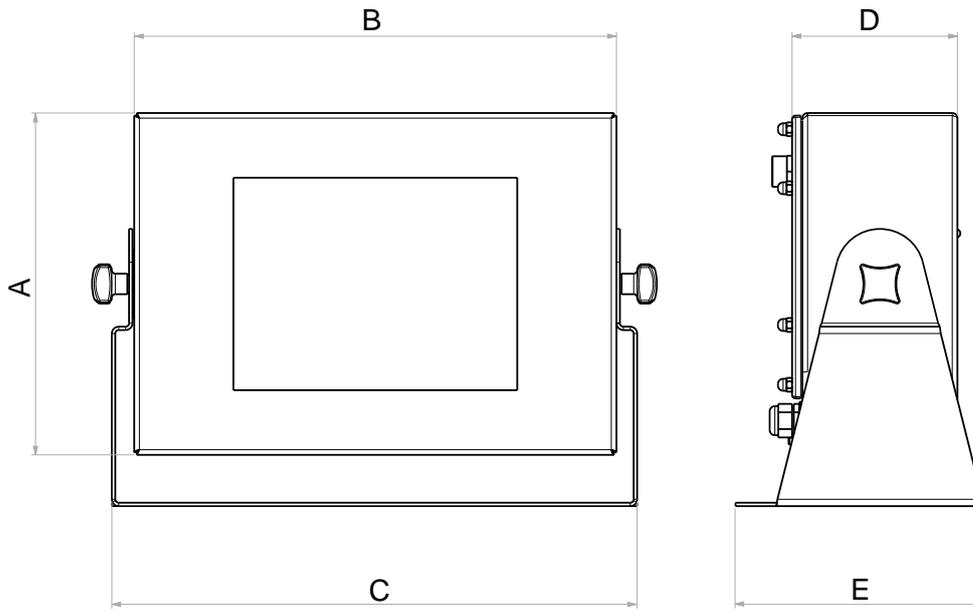

Dimensions

A	200 mm	D	96 mm
B	280 mm	E	144 mm
C	306 mm		

3590EGTB8

8-INCH TOUCHSCREEN DISPLAY

Reliable and sturdy weight indicator with 8-inch touchscreen display. Ideal for industrial applications, this device offers precision and convenience in any weighing operation. With front panel in stainless steel and Ethernet port as standard, it offers sturdiness and easy connection. The backlit, 8-inch resistive touchscreen colour display ensures clear data viewing, even when using gloves.



OIML
APPROVED



IP65



STAINLESS
STEEL



WEBSERVER



USB PORT

Version codes

	DESCRIPTION	CODE	
	8-inch touchscreen indicator with AF01 program. Panel housing. Colour display.	3590EGTB8-1	

Why choose

- Quick and clear data viewing thanks to 8-inch colour touchscreen display.
- The front panel in stainless steel with 8 fastening points, complete with waterproof seal, allows top-notch protection against water and dust. Additionally, it offers IP65 front protection for reliable resistance to water and dust ingress, ideal for heavy-duty industrial settings.
- Advanced connectivity with Ethernet port as standard, to readily connect the indicator to the company network, for easy control and management.
- In addition to the weighing program of your choice, the 3590EGTB8 indicator offers a dedicated area for the development of specific application programs, an integrated debugger and PC programming tools.
- Thanks to fully customisable work screens, all necessary weighing data, registries and free texts can be managed quickly and intuitively, greatly simplifying user operations.
- Multi-language software in Italian, English, German, French and Spanish. Option to enter your own translation thanks to new "CUSTOM LANGUAGE TOOL" software program.
- The 3590EGTB8 weight indicator is CE-M certifiable (OIML R-76 / R-51 MID / R-61 MID / EN 45501).

Main features

STANDARD APPLICATIONS:

- **AF01:** Totalisation and formulation

USER CUSTOMISABLE:

- Specific weighing programs according to client requirements
- Tailor-made weighing programs to replace pre-existing system terminals
- Wizards, messages for the operator
- Management of serial ports, customisation of protocols
- Full management of digital I/O
- Sequential or simultaneous automations
- Tailor-made data entry, archives

UPON REQUEST:

Dini Argeo also offers the program development service (upon request).

Technical features

Choice of application software	•
Fully customisable printouts and labels	•
Customised program development environment	•
Archives and registries	•
Alibi memory	•
Internal microSD slot for logos and images*	•
RS232 serial ports	3
RS485 serial port (replacing 1 x RS232 serial port)	○
USB connection for PC	○
TCP/IP Ethernet	•
Wi-Fi	-
USB flash drive to save weighings	○
Profibus / Modbus TCP / EtherCAT / DeviceNET / ProfiNET interfaces	○
Wireless Personal Area Network (WPAN) interface	○
Inputs	○ x2
Outputs	○ x4
Expansion with 6 inputs / 12 outputs	8 inputs / 16 outputs
Analogue output 0...10 V, 0...20 mA, 4...20 mA	○
8" colour touchscreen display	•
Mechanical keypad and light indicators	-
Case	AISI 304 stainless steel
IP rating	IP65 (front)
Power supply	12-24 Vdc
Multi-language program	•
Input for external keypad/barcode reader	•
Adjustable tilt bracket	-
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 2x6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	5 ⁽¹⁾
No. analogue load cells	16, 350 Ω 45, 1000 Ω
No. digital load cells	16 ⁽²⁾
OIML R76 / R51 - MID / R61 - MID / R134 approvals	•

(1) 4 analogue scales + 1 remote scale, via serial.


(2) Only for vehicle weighing programs (AF03, AF08, AF09).

* MicroSD not included

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- OIML R134
- Australian Pattern Approval (NMI)

Technical drawing (mm)

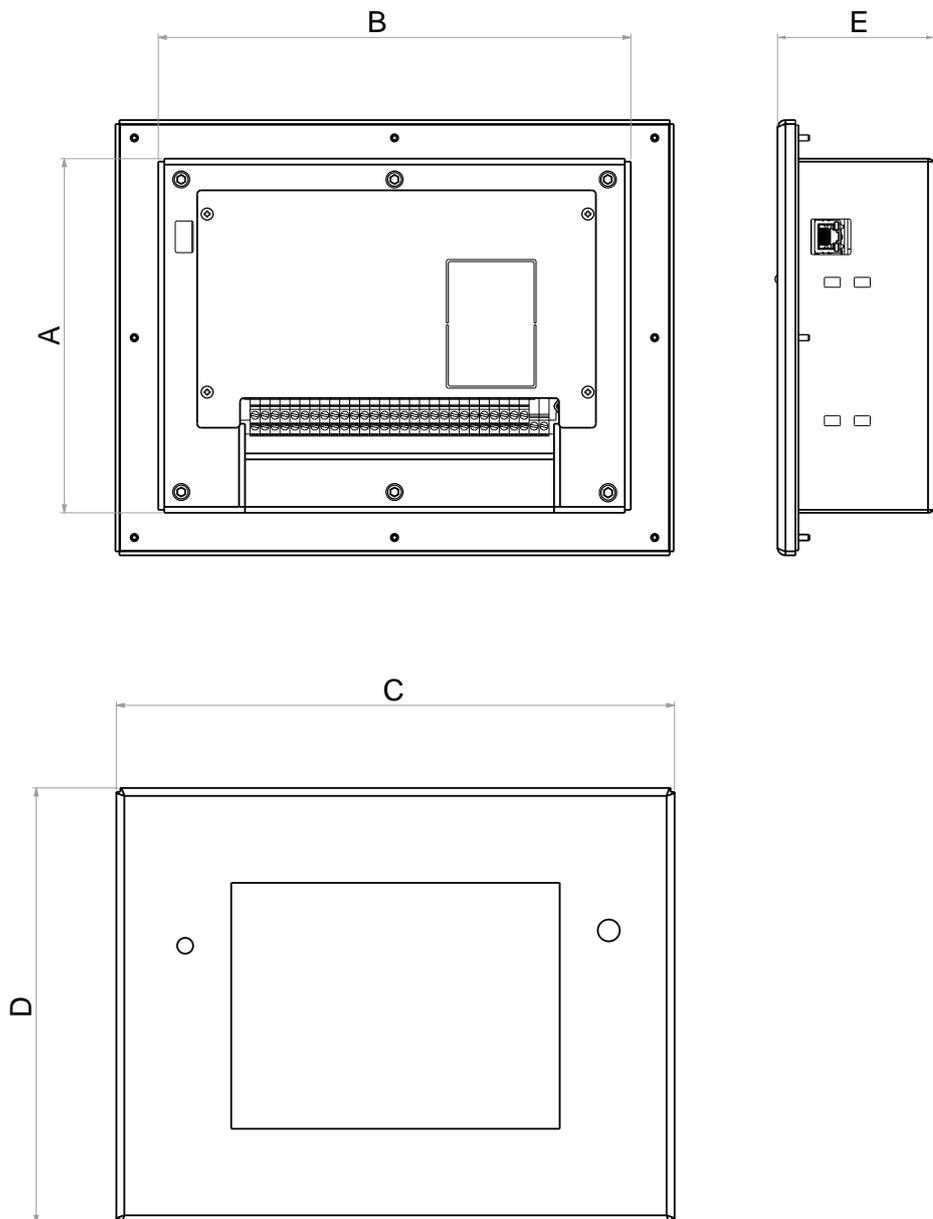

Dimensions			
A	179 mm	D	220 mm
B	237 mm	E	78.5 mm
C	280 mm		

3590EGTBOX8

8-INCH TOUCHSCREEN DISPLAY

Box in waterproof stainless steel for self-service weighing, with 8-inch touchscreen weight indicator. Designed specifically for self-service systems and weighbridges, this device features an intuitive interface for efficient management. Supplied standard with thermal printer and RFID card reader or coin slot, this is the complete solution for accurate and convenient weighing in any context.



OIML
APPROVED



STAINLESS
STEEL



USB
PORT



RFID CARD
READER



Version codes

	DESCRIPTION	CODE	
	Stainless steel box for column or wall mounting with weight indicator, 8-inch touchscreen display and AF03GT software, for weighing vehicles and managing weighbridges. Supplied with thermal printer and coin slot.	3590EGTBOX8GET-2	

Why choose

- Satin-finish stainless steel electrical cabinet, with protective shield for outdoor use, provides excellent protection against sun and weather, ensuring durability.
- The 8-inch, high brightness, resistive touchscreen display is easy to use even with gloves and around water and condensation.
- The double ventilation grille and integrated fan ensure optimal ventilation. The internal heater with thermostat ensures efficient operation even in the harshest conditions.
- Choose from QWERTY, AZERTY or QWERTZ touch screen keyboards for a customised input experience. With an integrated RFID proximity reader or coin slot, it offers a wide range of options for authentication and payment.
- The integrated alibi memory and quick display language selection add convenience and flexibility to the user experience. The high-performance thermal printer ensures fully configurable and customisable receipts with print speeds in excess of 150 mm/sec and 200 dpi resolution.
- With a 24-bit A/D converter and up to 3200 conv./sec, it ensures exceptional accuracy and fast data capture.
- With connection capacity for up to 16 analogue load cells and up to 3,000,000-point internal resolution, it meets the most sophisticated weighing requirements.
- Multi-language software in Italian, English, German, French, Portuguese and Spanish. Option to enter your own translation, thanks to new "CUSTOM LANGUAGE TOOL" software program.
- The 3590EGTBOX8 is CE-M certifiable.

Main features

STANDARD APPLICATIONS:

- **AF03:** Program for weighbridges

USER CUSTOMISABLE:

- Specific weighing programs according to client requirements
- Tailor-made weighing programs to replace pre-existing system terminals
- Wizards, messages for the operator
- Management of serial ports, customisation of protocols
- Full management of digital I/O
- Sequential or simultaneous automations
- Tailor-made data entry, archives

UPON REQUEST:

Dini Argeo also offers the program development service (upon request).

Technical features

Choice of application software	-
Fully customisable printouts and labels	●
Customised program development environment	●
Archives and registries	●
Alibi memory	●
Internal microSD slot for logos and images*	●
RS232 serial ports	3
RS485 serial port (replacing 1 x RS232 serial port)	○
USB connection for PC	○
TCP/IP Ethernet	●
Wi-Fi	-
USB flash drive to save weighings	○
Profibus / Modbus TCP / EtherCAT / DeviceNET / ProfiNET interfaces	○
Wireless Personal Area Network (WPAN) interface	○
Inputs	○x2
Outputs	○x4
Expansion with 6 inputs / 12 outputs	8 inputs / 16 outputs
Analogue output 0...10 V, 0...20 mA, 4...20 mA	○
8" colour touchscreen display	●
Mechanical keypad and light indicators	-
Case	AISI 304 stainless steel
IP rating	-
Power supply	110-240 Vac
Multi-language program	●
Input for external keypad/barcode reader	●
Adjustable tilt bracket	-
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 2x6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	5 ⁽¹⁾
No. analogue load cells	-
No. digital load cells	16 ⁽²⁾
OIML R76 / R51 - MID / R134 approvals	●

(1) 4 analogue scales + 1 remote scale, via serial.



(2) Only for vehicle weighing programs (AF03, AF08, AF09).

* MicroSD not included

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R134
- Australian Pattern Approval (NMI)

Technical drawing (mm)

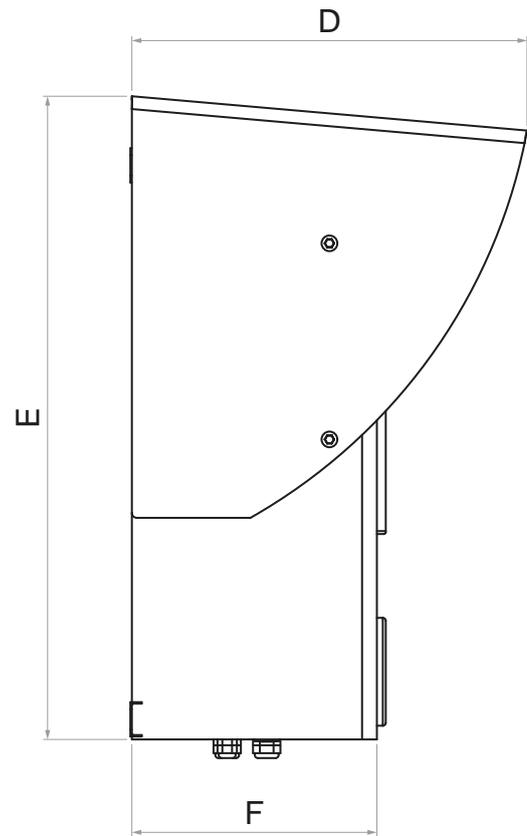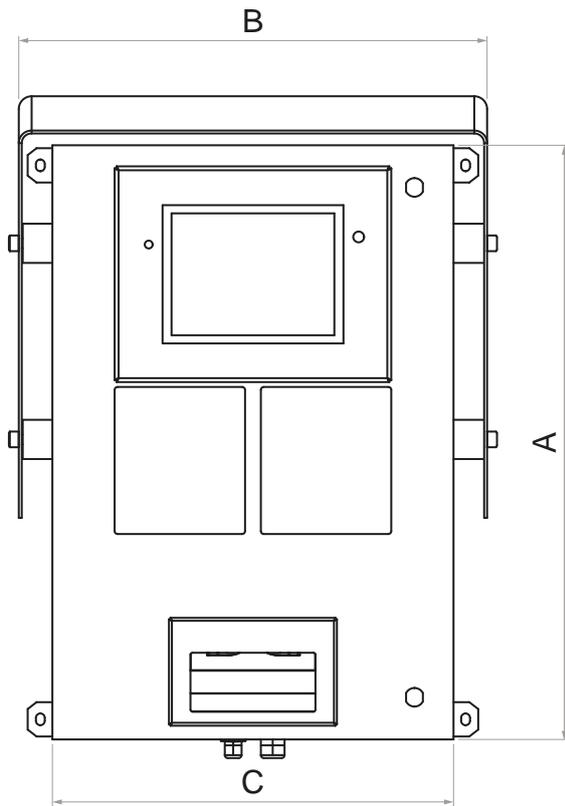

Dimensions

A	606 mm	D	400 mm
B	474 mm	E	656 mm
C	406 mm	F	248 mm

3590ET8D / 3590ETD

5.7- OR 8-INCH TOUCHSCREEN DISPLAY

Explore our advanced solution for digital weighbridges: the weight indicator with large touch screen display available in 5.7” or 8” versions is designed for the most demanding industrial applications. Supplied with a power supply unit specifically for digital load cells, it guarantees unrivalled accuracy and stability in your weighing processes. With its intuitive user interface and ability to handle a wide range of weighings, it makes weighing operations efficient and precise.



Version codes

	DESCRIPTION	CODE	
	Touchscreen indicator with AF03 program, specifically for connection to digital load cells. Housing in ABS. 8” colour display. Internal power supply for digital load cells. RS485 serial port with protection circuit against lightning and overvoltage.	3590ET8D-1	
	Touchscreen indicator with AF03 program, specifically for connection to digital load cells. Housing in ABS. 5.7” colour display. Internal power supply for digital load cells. RS485 serial port with protection circuit against lightning and overvoltage.	3590ETD	

Why choose

- Excellent viewing comfort, thanks to colour touchscreen display.
- Safety, durability and precision combined in a waterproof ABS case with IP65 protection rating.
- Supplied standard with 3 serial ports, Ethernet port, data transmission communication protocols, fully configurable printouts, integrated alibi memory and input for barcode/badge reader.
- In addition to the weighing program of your choice, the 3590 indicator offers a dedicated area for the development of specific application programs, an integrated debugger and PC programming tools.
- Thanks to fully customisable work screens, all necessary weighing data, registries and free texts can be managed quickly and intuitively, greatly simplifying user operations.
- Multi-language software in Italian, English, German, French, Portuguese and Spanish. Option to enter your own translation thanks to new “CUSTOM LANGUAGE TOOL” software program.
- The 3590ET8D / 3590ETD weight indicators are CE-M certifiable (OIML R-76 / EN 45501).

Main features

STANDARD APPLICATIONS:

- The indicator is fitted as standard with the **AF03GT** application program, specifically for weighbridges.

USER CUSTOMISABLE:

- Specific weighing programs according to client requirements
- Tailor-made weighing programs to replace pre-existing system terminals
- Wizards, messages for the operator
- Management of serial ports, customisation of protocols
- Full management of digital I/O
- Sequential or simultaneous automations
- Tailor-made data entry, archives

UPON REQUEST:

Dini Argeo also offers the program development service (upon request).

Technical features

Choice of application software	●
Fully customisable printouts and labels	●
Customised program development environment	●
Archives and registries	●
Alibi memory	●
Internal microSD slot for logos and images*	●
RS232 serial ports	3
RS485 serial port (replacing 1 x RS232 serial port)	1 / ●
USB connection for PC	○ / -
TCP/IP Ethernet	● / ○
Wi-Fi	○
USB flash drive to save weighings	○
Profibus / Modbus TCP / EtherCAT / DeviceNET / ProfiNET interfaces	○
Wireless Personal Area Network (WPAN) interface	○
Inputs	○ x2
Outputs	○ x4
Expansion with 6 inputs / 12 outputs	-
Analogue output 0...10 V, 0...20 mA, 4...20 mA	○
8" colour touchscreen display	●
Mechanical keypad and light indicators	-
Case	ABS
IP rating	IP65
Power supply	110-240 Vac
Multi-language program	●
Input for external keypad/barcode reader	●
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 2x6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	5 ⁽¹⁾
No. analogue load cells	16, 350 Ω 45, 1000 Ω
No. digital load cells	16 ⁽²⁾
OIML R76 / R51 - MID / R134 approvals	●

(1) 4 analogue scales + 1 remote scale, via serial.

(2) Only for vehicle weighing programs (AF03, AF08, AF09).

* MicroSD not included

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R134
- Australian Pattern Approval (NMI)




Supported digital load cells

- The specific hardware integrated in 3590ET8D and 3590ETD indicators, in combination with the AF03GT application program supplied as standard, enables managing the main digital load cells on the market:

Dini Argeo RCPTD
Dini Argeo RCD
Rice Lake RL5426D/5416D
Sensocar SP/CS
Scaime CB50X-DL
Flintec RC3D
HBM C16i (requires the HBM junction box and RS422/RS485 converter)

For a complete list of supported load cells, see the technical manual for the weighing program.

Technical drawing (mm)

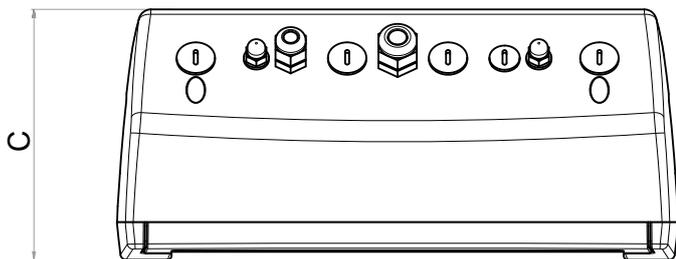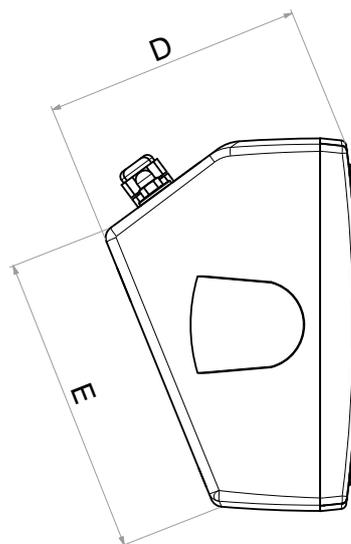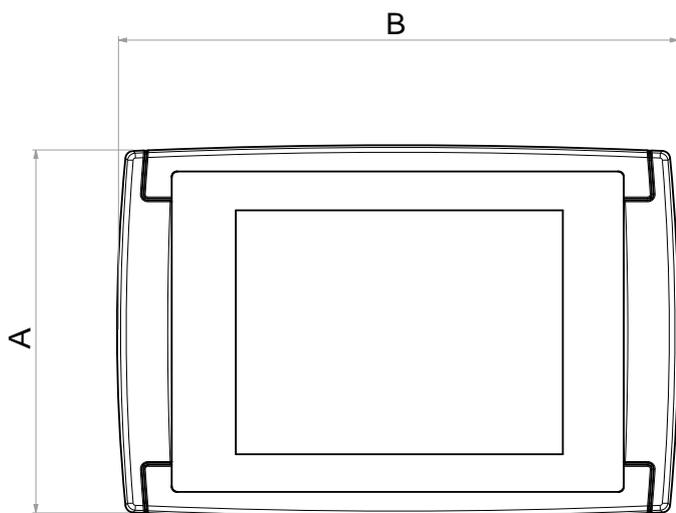

Dimensions			
A	184 mm	D	128 mm
B	278 mm	E	150 mm
C	120 mm		

LIST OF MAIN
OPTIONS AND ACCESSORIES
3590 SERIES

Main options and accessories

Image	Description	3590 EGT HYGIENX®											Code	
		3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTBOX8		3590EGT IECEX3GD
	Connection cable for BP6ESTATEX3GD battery.						•							BTCB3GD
	IP69K version.					•								IP69K
	Bracket for installing panel indicator.					•	•					•		PANEL-ST
	Version with AU power cable.									•				PWCORDAUSVDE
	Version with BS1363 power cable (UK plug).									•				PWCORDUKVDE
	RS232/C cable l=1.5 m for connection to PC.									•				RSCBP2P
	Installation, configuration and testing of Fieldbus 1S module. NET PRICE.	•	•			•	•	•				•		FB1SINST
	Version with US type-B power cable (Japan, North and Central America).									•				PWCORDUSVDE
	Kit of 10 metal expanders PG9 to PG11, IP68 (max. cable ø 12 mm)	•	•	•		•	•	•	•	•	•			PG9PG11C
	Kit of 10 metal expanders PG9 to PG13, IP68 (max. cable ø 12 mm)	•	•	•		•	•	•	•	•	•			PG9PG13C
	Installation of the ZBA1S / PFB485EX Zener barrier inside the indicator case. Note: the desired length of cable must also be purchased. NET PRICE.							•						ZBINST
	Radio alphanumeric repeater with multicolour 110-mm LED display.											•		GLR100-2G4
	RS485 alphanumeric repeater with multicolour 110-mm LED display. Complete with 10-m RS485 cable with IP67 connector.		•	•	•	•	•		•	•	•	•	•	GLR100
	RS485/CANOPEN interface for DIN rail with PCB, terminals, plastic box and labels with UL marking (if included).		•	•	•	•	•	•		•	•	•	•	CANOPEN1S
	RS485 - DeviceNET interface for DIN rail with PCB, terminals, plastic box and labels with UL marking (if included).		•	•	•	•	•	•		•	•	•	•	DEVICENET1S
	RS485 - EtherCAT interface for DIN rail with PCB, terminals, plastic box and labels with UL marking (if included).		•	•	•	•	•	•		•	•	•	•	ETHERCAT1S
	RS485 - Ethernet IP interface for DIN rail with PCB, terminals, plastic box and labels with UL marking (if included).		•	•	•	•	•	•		•	•	•	•	ETHERNETIP1S
	ProfiNET interface for DIN rail with PCB, terminals, plastic box and labels with UL marking (if included).		•	•	•	•	•	•		•	•	•	•	PROFINET1S

3590 SERIES

WEIGHT INDICATORS

DFW SERIES

INDUSTRIAL PCS
6116 SERIES

WEIGHT REPEATERS

OTHER INSTRUMENTS

WEIGHT TRANSMITTERS

PC SOFTWARE

Main options and accessories

Image	Description	3590 SERIES											Code			
		3590EGT HYGIENX®	3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D			3590EGTBOX8	3590EGT IECEX3GD
	Armoured cable 6x0.25 mm ² (suitable for Ex zones). Internal sheath in PVC, diameter 5 mm. Armour in iron and zinc alloy. External sheath in clear PVC, diameter 8 mm. Working temperature: -15 / +70 °C. Minimum bend radius >= 5 x O.D. €/m							•							LCCBA	
	Power supply unit kit and protection board for digital load cells. Includes RS485 Chip. NOTE: Assembly included in price.			•		•		•							DIGIKIT	
	ETHCBEX cable with cable gland and connectors. Length: 10 m.							•						•	ETHCBEX10M	
	RS485 connection cable for series Fieldbus to CPU. Length: 20 cm.	•		•			•	•	•				•	•	191750	
	Connection cable to CPU for series Fieldbus 1S. Length: 2 m		•			•					•	•		•	FB1SCB2M	
	Protective barrier for RS485, for direct connection in safe area. Max cable length: 200 m.									•					PFB485EX	
	Program for quick customisation of touchscreen display. For 3590ET and 3590EGT series indicators.		•	•	•	•	•		•	•	•	•	•	•	DDT	
	Intrinsically safe Zener barrier with three channels. Specific for connection to load cells, for mounting on DIN rail in safe area or explosion-proof enclosure.		•	•	•	•	•	•							ZBA1S	

Approval

Image	Description	3590 SERIES											Code			
		3590EGT HYGIENX®	3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D			3590EGTBOX8	3590EGT IECEX3GD
	Approved for Australia, for individual platform/scale.	•	•	•	•		•	•	•					•	ECEM-AU	
	3000e approval service, for individual platform/scale.						•						•		ECEM	
	Welmec plates and module for a scale. NET PRICE. Service available in combination with Dini Argeo indicator.	•	•	•	•	•	•	•	•	•	•	•	•	•	KCEM	

Available applications

📷	Description	3590 EGT HYGIENX®													Code		
		3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTBOX8	3590EGT IECEX3GD				
	Program for counting pieces/quantities.	•	•	•	•	•	•	•							•	AF02	
	Program for industrial weight/pricing labelling.	•	•	•	•	•	•	•							•	AF05	
	Program for static wheel and axle weighing on 2 or more platforms.		•	•	•	•	•	•							•	AF08	
	Program for single-component dosage in loading and unloading.	•	•	•	•	•	•	•							•	BATCH1	
	Program for dynamic or static axle weighing on 1 or 2 platforms.		•	•	•	•	•	•							•	AF09	
	Program for multi-component dosage in loading and unloading. NOTE: assembly on 3590 indicator requires IOEXPB expansion board.	•		•	•		•	•	•						•	BATCH	
	Program for weighing packages on conveyor belt. R61 certifiable.	•	•	•	•	•	•	•							•	CHECK	
	Program for weighbridge, entry/exit of vehicles. For 3590 "TOUCHSCREEN" series weight indicators.		•	•	•	•	•	•	•	•					•	AF03GT	
	Program for production/statistical control. For 3590 "TOUCHSCREEN" series weight indicators.	•	•	•	•	•	•	•							•	AF04GT	

Saving weights

📷	Description	3590 EGT HYGIENX®													Code		
		3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTBOX8	3590EGT IECEX3GD				
	Set of 5 USB flash drives for storing weights.		•	•	•	•	•		•	•	•	•	•		•	USBK	
	Internal interface for saving data on USB flash drive. Combine with 3590EGT8 touchscreen weight indicators. Does not occupy serial ports. USB flash drive supplied as standard.			•												USBEGT8	
	Integrated USB port for saving data on USB flash drive. Combine with touchscreen weight indicators. Does not occupy serial ports. USB flash drive supplied as standard.		•		•	•		•		•	•					USBEGT	
	WeiMonitor PC software for monitoring/recording weighings made on connected scale, in real time.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	SWM	
	Panel interface for saving data on USB flash drive. Does not occupy serial ports.														•	USBEGTKR	

Junction boxes / Junction boards - Cell cables

Image	Description												Code						
		3590EGT HYGIENX®	3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D				3590EGTBOX8	3590EGT IECEX3GD		
	Internal board for quick connection of multiple scales.	•		•	•		•	•	•								3590E4CH		
	LCCBC cable + 10-m extension.		•	•	•	•	•		•								LCCB10C		
	LCCBC cable + 5-m extension.		•	•	•	•	•		•								LCCB5C		
	Shielded cable 6x0.25 mm ² (suitable for Ex zones).								•								LCCB		
	Cable for connection of platform to indicator, l=50 cm. Female connector, solder type.		•	•	•	•	•		•								LCCBC		
	RS485 junction box, up to 10 digital load cells. Case in reinforced polyester, with up to 10 + 1 cable glands and surge arresters.				•		•		•		•	•					JB10QD-1		
	Stainless steel equalised junction box with up to 4 load cells. IP68/IP69K protection rating, with 4 + 1 cable gland.	•															JB4QIP69K		

Display customisation

Image	Description												Code						
		3590EGT HYGIENX®	3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D				3590EGTBOX8	3590EGT IECEX3GD		
	Set of 10 storage memories for customising display with logos and images.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	GTMEM		

ATEX 2GD push-button panel

Image	Description												Code						
		3590EGT HYGIENX®	3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D				3590EGTBOX8	3590EGT IECEX3GD		
	Armoured cable 4x0.5 mm ² (suitable for Ex zones). Inner sheath in PVC.								•								EXACB4		
	EX 2GD push-button panel with 2 buttons and cable gland (optional connection cable).								•								EXPHBN		

Printers / Labellers

		3590EGT HYGIENX®	3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTBOX8	3590EGT IECEX3GD	Code	
	Label customisation (max. 4 formats). NET price.	•	•	•	•	•	•	•							APRNSERV	
	Receipt customisation (max. 4 formats). NET price.		•	•	•	•	•	•							PRNSERV	
	Service loading one custom code-page, for TPR printer. Standard code-page: PC437 (USA, CENTRAL EUROPE)		•	•	•	•	•	•							CODEPG	
	High impact DotMatrix printer. Paper / Labels / Cards not included.							•							TM295	
	High impact DotMatrix printer. Paper not included.		•	•	•	•	•	•							LX300PRO	
	Panel thermal printer with connection cable. 5 Vdc power supply (power supply unit not included).			•			•	•		•	•				TPRP	
	Thermal printer solidly connected to 3590EGT indicator. IP65 stainless steel with splash/ dust protection door, for harsh environments or requiring high hygiene standards. Power supply from indicator.			•			•	•		•	•				TPRXTEGT-1	
	Thermal transfer or direct thermal labeler with peel-off mechanism. Maximum print dimensions: 25400 x 108 mm. Maximum roll diameter: 127 mm, and width up to 112 mm.			•			•	•		•	•				LP542TE	
	Desktop thermal printer. IP40 ABS container for the weight indicator, with a 1.5-m connection cable and internal power supply unit.			•			•	•		•	•				OBTPRB	
	Thermal desktop printer with cutter. Paper roll not included.		•	•	•	•	•	•		•	•				PR80-3	
	Direct thermal or transfer labeller. Optional peel-off. Maximum print dimensions: 25400 x 108 mm. Maximum roll diameter: 203 mm, and width up to 118 mm.	•													SMTPLUS-1	
	Peel-off and rewind kit for SMTPLUS-1 labeller.	•	•	•	•	•	•	•						•	SMTRPK-1	

3590 SERIES

WEIGHT INDICATORS

DFW SERIES

6116 SERIES

INDUSTRIAL PCS

WEIGHT REPEATERS

OTHER INSTRUMENTS

WEIGHT TRANSMITTERS

PC SOFTWARE

Communication interfaces

		3590EGT HYGIENX®	3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTBOX8	3590EGT IECEX3GD	Code	
WEIGHT INDICATORS 3590 SERIES		Internal RS485 interface (assembly and cable gland not included).	•	•			•	•							RS485C	
		Internal opto-isolated RS485 interface (assembly and cable gland not included).	•	•	•	•	•	•	•						RS485OPTO	
		Internal opto-isolated analogue output, 0-4/20 mA, 0-10 Vdc. (cable gland not included). For DFW, 3590 and CPW series indicators.	•		•	•		•	•	•					• DAC160-2	
		Internal RS232 / RS485 opto-isolated analogue output, 0/4/20 mA, 10/10 Vdc. For 3590 Touch Screen series indicators.		•	•		•	•	•	•					• DAC16OSER	
		External RS232/Ethernet interface. Suitable for creating networked multi-station weighbridge systems. Compatible only with AF03 software.		•		•	•	•				•	•	•	SETHNET	
		External 2.4 GHz radio module for PC, with USB cable l = 1 m. Power supply direct from USB port.	•	•	•	•	•	•		•		•	•		OBRF2G4-USB	
		External RS232/RS485/PROFIBUS interface for DIN rail.	•	•	•	•	•	•		•		•	•		• PROFI232-1	
		RS485 Profibus interface for DIN rail with PCB, terminals, plastic box and labels with UL marking (if included).			•				•						PROFIBUS1S	
		Internal 2.4 GHz radio module with IP69K rating.	•												RF2G469K	
		Internal 2.4 GHz radio module.		•	•		•	•	•		•	•		•	RF2G4	
INDUSTRIAL PCS 6116 SERIES		2.4 GHz radio-frequency module for ATEX zones 2 & 22.						•							OBRF2G4-3GD	
		External 2.4 GHz radio module, with cable l = 3 m.	•	•	•	•	•	•		•		•			OBRF2G4	
		RS232 / RS485 / Ethernet converter. Modbus RTU / Modbus TCP/IP (if compatible).				•							•		SETHDIN1	
		Internal Wi-Fi interface. For wireless connection (via access point) to the company computer system.		•		•				•	•	•		•	WIFITD3	
		Internal Wi-Fi interface. For wireless connection (via access point) to the company computer system.			•		•		•						WIFITPWLK2	
		Internal Wireless Personal Area Network (WPAN) interface. For wireless connection of the scale to tablets, smartphones, laptop PCs or barcode readers.	•	•	•	•	•	•	•	•	•	•			• WPAN-CL	
		Internal Ethernet interface. 10100 Mbps speed, TCP, UDP, IP, ARP, ICMP protocols, Ethernet Mac.	•				•	•	•	•	•	•			• ETHD	
		Internal Wi-Fi interface with IP69K rating. For wireless connection (via access point) to the company computer system.	•												WIFITD69K	

Connection cables

Image	Description	3590EGT HYGIENX®												Code	Service
		3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTBOX8	3590EGT IECEX3GD		
	RS232 cable l = 1.5 m for LP542xx, SMTPLUS, PR80 printers.	•	•	•	•	•		•	•	•				RSCBLP	S1
	RS232 cable l = 10 m for LP542xx, SMTPLUS, PR80 printers.	•	•	•	•	•		•	•	•				RSCBLP10M	S1
	RS232 cable l = 1.5 m for LX300, TM295 printers.		•	•	•	•		•	•	•				RSCBLX	S1
	RS232/C - DB9/RJ11 serial cable - l = 1.5 m.	•	•	•		•	•	•	•	•				RSCBRJ	S1
	RS232/C - DB9/RJ11 serial cable - l = 10 m.	•	•	•		•	•	•	•	•				RSCBRJ10M	S1
	4-core shielded twisted pair cable (2x2x0.34 mm ²), for RS485 communication or analogue output.			•		•	•	•		•	•		•	RSCBTW	
	USB PC/RS485 converter cable, l=1.5 m. With PG9 metal cable gland.	•	•	•	•	•		•		•	•			RSCBUSB485	
	Ethernet cable, l = 1.5 m. With cable gland, for connection between indicator and PC network.	•	•	•		•	•	•	•	•	•			ETHCBRJ	S1
	USB PC/RS232 DB9 converter cable, l=1.5 m. USB/DB9 connector.								•					RSCBUSBKR	
	USB PC/RS232 converter cable, l = 1.5 m, with PG9. USB/RJ11 connector. Connects to weight indicators with IP65, IP68 and IP69K rating.	•	•	•		•	•	•		•	•			RSCBUSBPG	S1
	Multi-core cable (4x2xAWG24) suitable for Ethernet connections in Ex zones (connectors and cable gland only installed with S6 service).									•			•	ETHCBEX	S6

Weight repeaters

Image	Description	3590EGT HYGIENX®												Code	Service
		3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTBOX8	3590EGT IECEX3GD		
	RS485 alphanumeric repeater with 110 mm multicolour LED display, stainless steel casing and IP68 protection rating.	•												GLR100I	
	Weight repeater with 60-mm LED display. Housing in IP68 stainless steel, 5-key keypad, valve for regulating humidity and pressure, and configurable protocol.	•												DGT60R-1	
	Weight repeater with 100-mm LED display. Housing in IP68 stainless steel, 5-key keypad, and valve for regulating humidity and pressure.	•	•	•	•	•		•	•	•	•	•		DGT100R-1	

PC keyboard / Barcode reader / Connection cable

	Description	3590 EGT HYGIENX®											Code			
		3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTBOX8				3590EGT IECEX3GD
	PC keyboard cable with mini DIN connector.	•	•	•	•	•		•	•	•	•			KBCBCE		
	QWERTY PC keyboard (requires mini DIN cable).	•	•	•	•	•		•	•	•	•			PCKBRD		
	Optical 1D/2D barcode reader with stand.	•		•	•	•		•	•	•	•			SC2D		
	Optical 1D barcode reader with stand.	•	•	•	•	•		•	•	•	•			SCCDR21		
	Wireless Personal Area Network (WPAN) scanner for 1D/2D barcode. Charging base included.	•	•	•	•	•		•	•	•	•			SCBTH		
	Pocket Wireless Personal Area Network (WPAN) scanner for 1D/2D barcode. With USB cable for charging.	•	•	•	•	•		•	•	•	•			SCBTHP		

RS485 protection against lightning and overvoltage

	Description	3590 EGT HYGIENX®											Code			
		3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTBOX8				3590EGT IECEX3GD
	Protection circuit for 485 port, with case for installation on DIN rail. Protection according to IEC 1000-4-5/D (IEC 801-5/D).												•	RS485PDIN		

Control light

	Description	3590 EGT HYGIENX®											Code			
		3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTBOX8				3590EGT IECEX3GD
	3-Way control light in ABS (for indicators with relay outputs). Acoustic alarm signal, connection cable, power supply from indicator.	•			•									OBCLTP		

Options for ATEX installations

📷	Description	3590 EGT HYGIENX®										Code				
		3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D			3590EGTBOX8	3590EGT IECEX3GD	
	ATEX equalised junction box in IP67 ABS, for up to 4 cells. 4 + 1 cable gland.	•	•	•	•	•	•	•							JB4QA	
	ATEX equalised junction box, IP66 stainless steel, up to 4 cells. 4 + 1 cable gland.	•	•	•	•	•	•	•							JB4QAI	
	ATEX Zener 3 barrier kit for load cells, in ABS box. For up to 4 x 350 ohm cells, for intrinsically safe weighing systems in hazardous area.	•	•	•	•	•	•	•							KMB4-1	
	ATEX box kit in ABS, with ZBA1S barrier for load cells. For intrinsically safe weighing systems in hazardous area.	•	•	•	•	•	•	•							KZBA-1	
	Blue shielded cable 6x0.22 mm ² , only for EX i assemblies (2GD). Inner sheath in PVC. Shielding with tinned copper braid.	•	•	•	•	•	•	•							EXCB6	
	ATEX Declaration of Conformity for equipment. Type: Ex II 3G IIC T6 Gc X and Ex II 3D IIIC T115°C Dc X. Supplied with printed document describing assembly and ATEX Declaration of Conformity for equipment (EN, DE, FR, ES and IT).														• DCATEX3GD	
	ATEX Declaration for equipment for system with Dini Argeo Zener barriers. Type: Ex II 2G IIC T6 Gb X and Ex II 2D IIIC T125°C Db X. Supplied with printed document describing assembly and ATEX Declaration of Conformity for equipment (EN and IT).	•	•	•	•	•	•	•							• DCATEXMB4	
	ATEX Declaration of Conformity for equipment. Type: Ex II 3G IIB T6 Gc X and Ex II 3D IIIC T115 °C Dc X. Supplied with printed document describing assembly and ATEX Declaration of Conformity for equipment (EN, DE, FR, ES and IT).														• DCATEX3590E3GD	

Power supply units

📷	Description	3590 EGT HYGIENX®										Code				
		3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D			3590EGTBOX8	3590EGT IECEX3GD	
	Battery charger for safe zone, for ATEX BP6ESTATEX3GD battery.														• BP6CB	
	5 Vdc power supply unit.														• TPRPCAL	
	Power supply unit for DIN rail, 12 Vdc. 110-240Vac in input. CE and UL approval. Not compatible with BOX2121S.														• MDR2012	
	External ATEX battery pack, in IP65 stainless steel, for zones 2 and 22.														• BP6ESTATEX3GD	

Digital Inputs / Outputs

Image	Description	3590 EGT HYGIENX®											Code						
		3590ET8	3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D				3590EGTBOX8	3590EGT IECEX3GD		
	Kit of 2 opto-isolated inputs (assembly and cable gland not included).	•	•			•	•			•	•	•					C2IN		
	Kit of 4 opto-isolated outputs (assembly and cable gland not included).	•	•			•	•			•	•	•					C4OUT		
	Internal board for 12 OUT and 6 IN (assembly and cable gland not included). Includes expansion circuit of indicator power supply range (8-40 Vdc).			•	•												IOEXPBE		
	Internal board for 12 OUT and 6 IN (assembly and cable gland not included). Includes expansion circuit of indicator power supply range (8-40 Vdc).	•						•	•	•							IOEXPB		

Consumables

Image	Description	3590 EGT HYGIENX®											Code						
		3590ET8	3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D				3590EGTBOX8	3590EGT IECEX3GD		
	Thermal paper roll, width: 80 mm. Hole: 25 mm. Outer diameter: 60 mm.															•	RPT80SELF		
	Set of 500 tokens for coin slot.															•	GETT500		
	50 thermal paper rolls, length: 30 m, width: 57 mm. Hole: 12 mm. Outer diameter: 51 mm.									•							RPT57C		

Floor columns

Image	Description	3590 EGT HYGIENX®											Code						
		3590ET8	3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D				3590EGTBOX8	3590EGT IECEX3GD		
	Column in stainless steel, 450x450 mm, h=917 mm, Ø 38 mm. Base in painted steel. For DINI ARGEO and SCALE HOUSE indicators.		•	•		•	•		•								CSP38		
	Column in stainless steel, 350x350mm mm, h=750 mm. Base in painted steel. For DINI ARGEO and SCALE HOUSE indicators.		•	•		•	•		•								CSP38D		
	Column in AISI 304 stainless steel, 450x450 mm, h=917 mm, Ø 38 mm. For DINI ARGEO and SCALE HOUSE indicators.	•	•	•		•	•	•	•								CSP3811		

PG cable glands

Image	Description	3590 EGT HYGIENX®											Code	
		3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTB0X8		3590EGT IECEX3GD
	Set of 10 PG11 metal cable glands for weight indicators.	•				•								PG11M
	Set of 10 PG13 metal cable glands for weight indicators.	•				•								PG13M
	Set of 10 PG7 metal cable glands for weight indicators. With ring nuts and seals.	•	•		•	•								PG7M
	Set of 10 PG7 cable glands for indicators in ABS. With ring nuts and seals.		•		•				•	•				PG7P
	Set of 10 PG9 metal cable glands for weight indicators. With ring nuts and seals.	•	•		•	•								PG9M
	Set of 10 PG9 cable glands for indicators in ABS. With ring nuts and seals.		•		•				•	•	•			PG9P
	Set of 10 PG7 metal cable glands for ATEX indicators. With ring nuts and seals. Cable diameter: from 3 to 6.5 mm.							•						PG7EX
	Set of 10 PG9 metal cable glands for ATEX indicators. With ring nuts and seals. Cable diameter: from 4 to 8 mm.							•						PG9EX
	PG7 cable gland for DFW and 3590 series IECEx Cable diameter: from 4 to 7 mm.												•	PG7-IECEX
	PG9 cable gland for DFW and 3590 series IECEx Cable diameter: from 4 to 7 mm.												•	PG9-IECEX
	PG13 cable gland for DFW and 3590 series IECEx Cable diameter: from 4 to 7 mm.												•	PG13-IECEX

Optional power supply cables

Image	Description	3590 EGT HYGIENX®											Code	
		3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTB0X8		3590EGT IECEX3GD
	Version with AU power cable.	•	•	•	•	•		•		•	•	•		PWCORDAUS
	Version with SEV1011 power cable (CH plug).	•	•	•	•	•		•		•	•	•		PWCORDCH
	Version with BS1363 power cable (UK plug).	•	•	•	•	•		•		•	•	•		PWCORDUK
	Version with US type-B power cable (Japan, North and Central America).	•	•	•	•	•		•		•	•	•		PWCORDUS

Remote controls

Image	Description	3590 EGT HYGIENX®												Code			
		3590ET8	3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTBOX8			3590EGT IECEX3GD	
	Radio-frequency remote control and receiver with extension for installations where other optional boards are required with connection on AMP.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	TLRP	

Protection cover

Image	Description	3590 EGT HYGIENX®												Code			
		3590ET8	3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTBOX8			3590EGT IECEX3GD	
	Kit of 10 moulded protective covers in clear plastic. For 3590ED and 3590EGT indicators.	•					•									CVRXT	
	Kit of 10 moulded protective covers in clear plastic. For DFWXP or 3590EXP series indicators with case in ABS.		•		•						•	•				CVRXP	

External battery

Image	Description	3590 EGT HYGIENX®												Code			
		3590ET8	3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTBOX8			3590EGT IECEX3GD	
	External battery charger for BT6V12A battery.		•	•		•	•		•							BP6CBE	
	Connection cable for BP6V12A battery.		•	•		•	•		•							BTCB6	
	External 6V 12Ah battery pack, in stainless steel, IP67.		•	•		•	•		•							BP6V12A	

Protection against electric discharges

Image	Description	3590 EGT HYGIENX®												Code			
		3590ET8	3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTBOX8			3590EGT IECEX3GD	
	Protection board against electric discharges according to IEC 1000-4-5/D (IEC 801-5/D).		•	•		•	•		•	•						3590EEP	

Columns, support brackets, shields

		3590EGT HYGIENX®	3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTB0X8	3590EGT IECEX3GD	Code	
	Bracket in stainless steel for mounting ATEX battery on column. Compatible with "DFWBP76ATEX..", "IECEXB", "BP6ESTATEX3GD.." and "BP6V12A".		•	•		•	•	•	•						STFA12	
	AISI 304 stainless steel bracket, adjustable tilt. For mounting weight indicator.	•	•			•	•	•			•	•			STFR-1	
	AISI 304 stainless steel bracket, wall-mount. For mounting weight indicator.	•	•			•	•	•			•	•			STFI-1	
	AISI 304 stainless steel bracket, adjustable tilt. For mounting IECEX weight indicators.													•	EXSTFR	
	AISI 304 stainless steel bracket, wall-mount. For mounting IECEX weight indicators.													•	EXSTFI	

Program for compiling archives

		3590EGT HYGIENX®	3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTB0X8	3590EGT IECEX3GD	Code	
	PC program for quick compilation of archives. For 3590Exx and CPWExx tools.	•	•	•	•	•	•	•	•	•	•	•	•		DBM	

Other options

		3590EGT HYGIENX®	3590ET8	3590EGT8	3590EGTB8	3590ET	3590EGT	3590EGT3GD	3590EGTT	3590ETKR	3590ETD	3590ET8D	3590EGTB0X8	3590EGT IECEX3GD	Code	
	Technical support by telephone upon request.	•	•	•	•	•	•	•	•	•	•	•	•	•	TECSUP	
	Printed technical manual (downloadable for free from the website).	•	•	•	•	•	•		•	•	•	•			TECMAN	
	Printed user manual (downloadable for free from the website, in the "DOCUMENTS" section in the Home Page, by entering the product serial number).	•	•	•	•	•	•		•	•	•	•			UMAN	
	EU Declaration of Conformity, EU verification certificate, test certificate and metrology booklet, in printed format.	•	•	•	•	•	•	•	•	•	•	•	•	•	ECEMDOC	
	Set of 10 RFID cards for use with RFID reader.												•		RFIDCARD	

 **DINI AR GEO**

↔0↔

0.0000 kg

W1



G



ZERO



TARE



MODE



PRINT



WEIGHT INDICATORS

DFW SERIES

The Dini Argeo DFW series includes a wide range of indicators ideal for basic industrial applications, in various settings and sectors. They are easy to program and use, and the wide choice of available functions and interfaces makes DFW weight indicators perfect for every weighing need.

DFW indicators feature customisable multifunction weighing programs that make it easy for operators to quickly choose different weighing modes, such as zeroing, net and gross, weight totalisation, piece-counting, formulation, percentage weighing and more.

DFW SERIES



DFWX

DFWX
HYGIENX®

DFWXS

DFWK
HYGIENX®

	DFWX	DFWX HYGIENX®	DFWXS	DFWK HYGIENX®	
PLUS	Multifunction program	●	●	●	
	Program for weighbridges	-	-	-	
	Program for weighing wheels and vehicle axles	-	-	-	
	Program for dosing	-	-	-	
	Thermal printer	○	○	○	
	Time and date	○	○	○	
	Printing labels	○	○	○	●
COMMUNICATION	RS232/C bidirectional port	● (x2)	● (x2)	● (x2)	● (x2)
	RS485 serial port (replacing 1 x RS232 serial port)	●	●	●	○
	Bidirectional serial port over fibre optic	-	-	-	-
	USB connection for PC	●	●	●	○
	TCP/IP Ethernet	●	●	○	○
	Wi-Fi	○	○	○	-
	USB flash drive to save weighings	-	-	-	-
	Wireless Personal Area Network (WPAN) interface	○	○	○	○
IN/OUT	Inputs	○ (x2)	○ (x2)	○ (x2)	○ (x2)
	Outputs	○ (x6)	○ (x6)	○ (x6)	○ (x6)
	Analogue output (4...20 mA/0...10 Vdc)	○	○	○	-
HARDWARE	Backlit LCD display	●	●	●	●
	Specific display	●	●	●	-
	Keypad	Mechanical/ membrane	Mechanical	Mechanical	Mechanical
	Case	AISI 304 stainless steel	AISI 316 stainless steel	AISI 304 stainless steel	AISI 316 stainless steel
	IP rating	IP68 and IP69K	IP68 and IP69K	IP68 and IP69K	IP68 and IP69K
	Board power supply	3,3 ÷ 16 V	3,3 ÷ 16 V	3,3 ÷ 16 V	5 ÷ 12 V
	Indicator / battery charger power supply	Internal 110- 230 Vac	Internal 110- 230 Vac	Internal 110- 230 Vac	110-240 Vac
	Internal battery	●	●	●	●
	Adjustable tilt bracket	●	●	●	○
OIML	OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e			
	Converter	24 bit / 3200 Hz	24 bit / 3200 Hz	24 bit / 3200 Hz	24 bit / 3200 Hz
	Connectable scales	1	1	1	1
	No. analogue load cells	16 x 350 Ω	16 x 350 Ω	16 x 350 Ω	8 x 350 Ω 16 x 700 Ω
	OIML R76 / R51 - MID / R134 approvals	-	-	-	●

LEGEND: ● Standard ○ Optional - Not available



DFWL / DFWLB DFWLI DFWXP DFWKRP DFWDXT DFWKXT DFWIECEX2GD DFWATEX2GD / DFWATEX2GDF

●	●	●	-	●	●	●	● / -
-	-	-	-	-	-	-	-
-	-	-	●	-	-	-	-
-	-	-	-	-	-	-	- / ●
○	○	● **	●	○	○	-	-
○	○	● **	●	○	○	○	-
●	●	●	-	●	●	-	-
● (x2)	● (x2)	● (x2)	● (x2)	● (x2)	● (x2)	-	-
○	○	○	○	○	○	● (x1) ○ (x2)	-
-	-	-	-	-	-	-	○ (x1) / ● (x1)
○	○	○	○	○	○	-	-
-	○	○	○	○	○	-	-
-	●	○	○	○	○	-	-
-	-	○	○	○	○	-	-
○	○	○	○	○	○	●	-
-	○ (x2)	○ (x2)	-	○ (x2)	○ (x2)	○ (x4)	4 **** / 4
-	○ (x6)	○ (x6)	-	○ (x6)	○ (x6)	○ (x4/12)	4 ***** / 4
-	-	○	○	○	○	○	○ / -
●	●	●	●	-	●	●	-
-	-	-	-	Super-bright red LEDs	-	Colour	-
Mechanical	Mechanical	Membrane	Membrane	Membrane	Membrane	Mechanical	Membrane
ABS	AISI 316 stainless steel	ABS	ABS	AISI 316 stainless steel	AISI 316 stainless steel	AISI 316 stainless steel	AISI 316 stainless steel
IP54 / IP68	IP68	IP65	IP40	IP68	IP68	IP65 and IP68	IP65 and IP68
5 ÷ 12 V	5 ÷ 12 V	Battery: 6 V Power: 12 V	Battery: 6 V Power: 12 V	Battery: 6 V Power: 12 ÷ 24 V	Battery: 6 V Power: 12 V	5,1 ÷ 9,6 V	8 ÷ 12 V
110-240 Vac	110-240 Vac	110-240 Vac	110-240 Vac	110-240 Vac	110-240 Vac	○	○
DFWL: 4 x AA batteries DFWLB: ●	-	●	●	●	●	External	○ / -
●	○	○	-	○	○	○	○
3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e							
24 bit / 3200 Hz	24 bit / 3200 Hz	24 bit / 3200 Hz	24 bit / 3200 Hz	24 bit / 3200 Hz	24 bit / 3200 Hz	-	○ / ●
1	1	1	4	1	1	1	1
DFWL: 6 x 350 Ω 16 x 700 Ω DFWLB: 7 x 350 Ω 16 x 700 Ω	8 x 350 Ω 16 x 700 Ω	8 x 350 Ω 16 x 700 Ω	25 x 1000 Ω	8 x 350 Ω 16 x 700 Ω	8 x 350 Ω 16 x 700 Ω	8 x 350 Ω	4 x 350 Ω
●	●	●	●	●	●	●	●

* Replacing RS232 serial port.
 ** Standard in versions DFWXP and DFWKXP, optional in other versions.
 *** Optional in all models except those with integrated printer (DFWXP and DFWKXP).
 **** Standard in version DFWATEX2GDF. ***** Only in version PLUS.

DFW SERIES



DFWIECEX3GD

DFWATEX3GD

DFWIECEX-
BATCH1

	DFWIECEX3GD	DFWATEX3GD	DFWIECEX- BATCH1	
PLUS	Multifunction program	●	●	-
	Program for weighbridges	-	-	-
	Program for weighing wheels and vehicle axles	-	-	-
	Program for dosing	-	-	●
	Thermal printer	○	○	-
	Time and date	○	○	○
	Printing labels	○	○	-
COMMUNICATION	RS232/C bidirectional port	● (x2)	● (x2)	-
	RS485 serial port (replacing 1 x RS232 serial port)	○	○	● (x1) ○ (x2)
	Bidirectional serial port over fibre optic	-	-	-
	USB connection for PC	-	-	-
	TCP/IP Ethernet	○	○	-
	Wi-Fi	-	○	-
	USB flash drive to save weighings	-	-	-
	Wireless Personal Area Network (WPAN) interface	-	-	○
IN/OUT	Inputs	○ (x2)	○ (x2)	4
	Outputs	○ (x6)	○ (x6)	12
	Analogue output (4...20 mA/0...10 Vdc)	-	○	○
HARDWARE	Backlit LCD display	●	●	●
	Specific display	-	-	Colour
	Keypad	Mechanical	Membrane	Mechanical
	Case	AISI 304 stainless steel	AISI 304 stainless steel	AISI 304 stainless steel
	IP rating	IP68	IP68	IP65 and IP68
	Board power supply	5 ÷ 12 V	Battery: 6 V Power: 12 V	5.1 ÷ 9.6 V
	Indicator / battery charger power supply	110-240 Vac 12-24 Vdc	110-240 Vac or battery	○
	Internal battery	-	○	○
	Adjustable tilt bracket	○	○	○
OIML	OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e		
	Converter	24 bit / 3200 Hz	24 bit / 3200 Hz	24 bit / 3200 Hz
	Connectable scales	1	1	1
	No. analogue load cells	8 x 350 Ω	8 x 350 Ω	8 x 350 Ω
	OIML R76 / R51 - MID / R134 approvals	●	●	●

LEGEND: ● Standard ○ Optional - Not available

* replacing RS232 serial port.

** standard in versions DFWPXP and DFWKXP, optional in other versions.

*** Optional in all models except those with integrated printer (DFWPXP and DFWKXP).

**** Standard in version DFWATEX2GDF. ***** Only in version PLUS.

DFWX

21-KEY NUMERIC FUNCTION KEYBOARD AND INTERACTIVE BACKLIT LCD DISPLAY

AISI 304 stainless steel weight indicator with IP68 and IP69K protection rating to withstand dust and high-pressure water jets and temperatures. Ideal for advanced industrial applications, thanks to its versatility and numerous connectivity options.



IP68



IP69K



AISI 304
STAINLESS STEEL



Version codes

	DESCRIPTION	CODE	
	Multifunction weight indicator with 110-240 Vac power supply and EU Plug. Stainless steel case. 25 mm RGB display. Provision for analog and radio frequency or Wireless Personal Area Network (WPAN) output options.	DFWX	
	Multifunction weight indicator with 110-240 Vac power supply and EU Plug, with built-in rechargeable lithium battery. Stainless steel case. 25 mm RGB display. Provision for analog and radio frequency or Wireless Personal Area Network (WPAN) output options.	DFWXB	
	Multifunction weight indicator with TCP/IP Ethernet port and Alibi Memory. 110-240 Vac power supply and EU plug. Stainless steel case. 25mm RGB display.	DFWX-ETH	
	Multifunction weight indicator with WiFi and Ethernet TCP/IP ports and Alibi Memory. 110-240 Vac power supply and EU plug, with built-in rechargeable lithium battery. Stainless Steel Case. 25mm RGB display.	DFWXB-WIFI	

Why choose

- Interactive 6-digit 25mm LCD display with RGB backlighting (7 selectable colors)
- 21-key numeric-function keypad
- Configurable energy-saving functions
- Enhanced connectivity
- Shortcuts available for simplified configuration
- Using multiple serial ports simultaneously
- Battery, Ethernet port, or WiFi port versions available
- Internal 110-230 Vac power supply or rechargeable lithium battery
- Compact dimensions: 170 x 200 x 70 mm
- New multifunction program

* These quick menu access keys can be inhibited by configuring a dedicated password.

Main features

COMMUNICATION PORTS - INPUTS/OUTPUTS:

- RS232 on screw terminals for connection to PC/Dini Argeo printers
- RS232 on AMP connector, with CTS, for connection to Dini Argeo printer
- RS485 on screw terminals for connection to PC/PLC, with Modbus RTU or ASCII protocol
- USB-C for PC connection
- Ethernet TCP/IP port (models DFWX-ETH and DFWXB-WIFI). (Includes Modbus-TCP protocol)
- WiFi Port (Model DFWXB-WIFI)

Optional:

- RadioFrequency 2.4GHz
- Wireless Personal Area Network (WPAN)
- Configurable analog output 4:20mA or 0-10V
- Expansion board with 2 IN and 6 OUT digital

NEW MULTIFUNCTIONAL PROGRAM:

New multifunction weighing program that allows you to use multiple functions simultaneously:

- Conversion of weight to lb, N or customized
- Counting pieces in loading or unloading
- Piece-weight control in loading or unloading, with thresholds programmable from keypad or via communication protocol
- Piece-weight totalization
- Automatic Tare function

MEASUREMENT AND METROLOGICAL FEATURES:

- Connectable to up to 16 load cells with 350Ω output resistance.
- Single-range, multi-range or multi-interval approvable, Class III or IIII, up to 10,000e per range. Minimum signal 0.3μV/e.
- Calibration up to Max. 800,000 divisions, for internal factory use; Minimum signal 0.01μV/e.
- Internal resolution up to 3,000,000 points, ideal for high resolution applications and accurate part counting.
- Up to 8 points of signal linearization.
- Digital calibration and set-up from keyboard or PC with DINITOOLS.
- Functions for silo and tank calibration
- Weighing recording approved for data exchange with PC and Management, via Alibi Memory option or D-LEGAL PC software.


Technical features

Multifunction program	•
Weighbridge program	-
Program for weighing vehicle wheels and axles	-
Dosing program	-
RS232/C bidirectional port	• x2
RS485 serial port	•
Bidirectional serial port on fiber optics	-
USB connection for PC	•
Ethernet TCP/IP	•
Wi-Fi	•
USB key for saving weighings	-
Wireless Personal Area Network (WPAN) interface	•
Thermal printer	•
Clock and calendar	•
Label printing	•
Inputs	• x2
Outputs	• x6
Analog output 4...20 mA, 0...10 Vdc	•
Backlit LCD display	•
Specific display	-
Keyboard	Mechanical/membrane
Enclosure	AISI 304 stainless steel
IP protection	IP68 and IP69K
Power supply board	3,3 ÷ 16 V
Indicator power supply	Internal 110-230 Vac
Internal rechargeable LiPo battery (up to 100 hours of battery life depending on the model and mode of use)	•
Adjustable tilt bracket	•
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	1
No. Analog load cells	16 with 350 Ω
OIML R76 / R51 - MID / R134 certifications	-

Approvals

- EU Type Examination Certificate (45501:2015)

Technical drawing (mm)

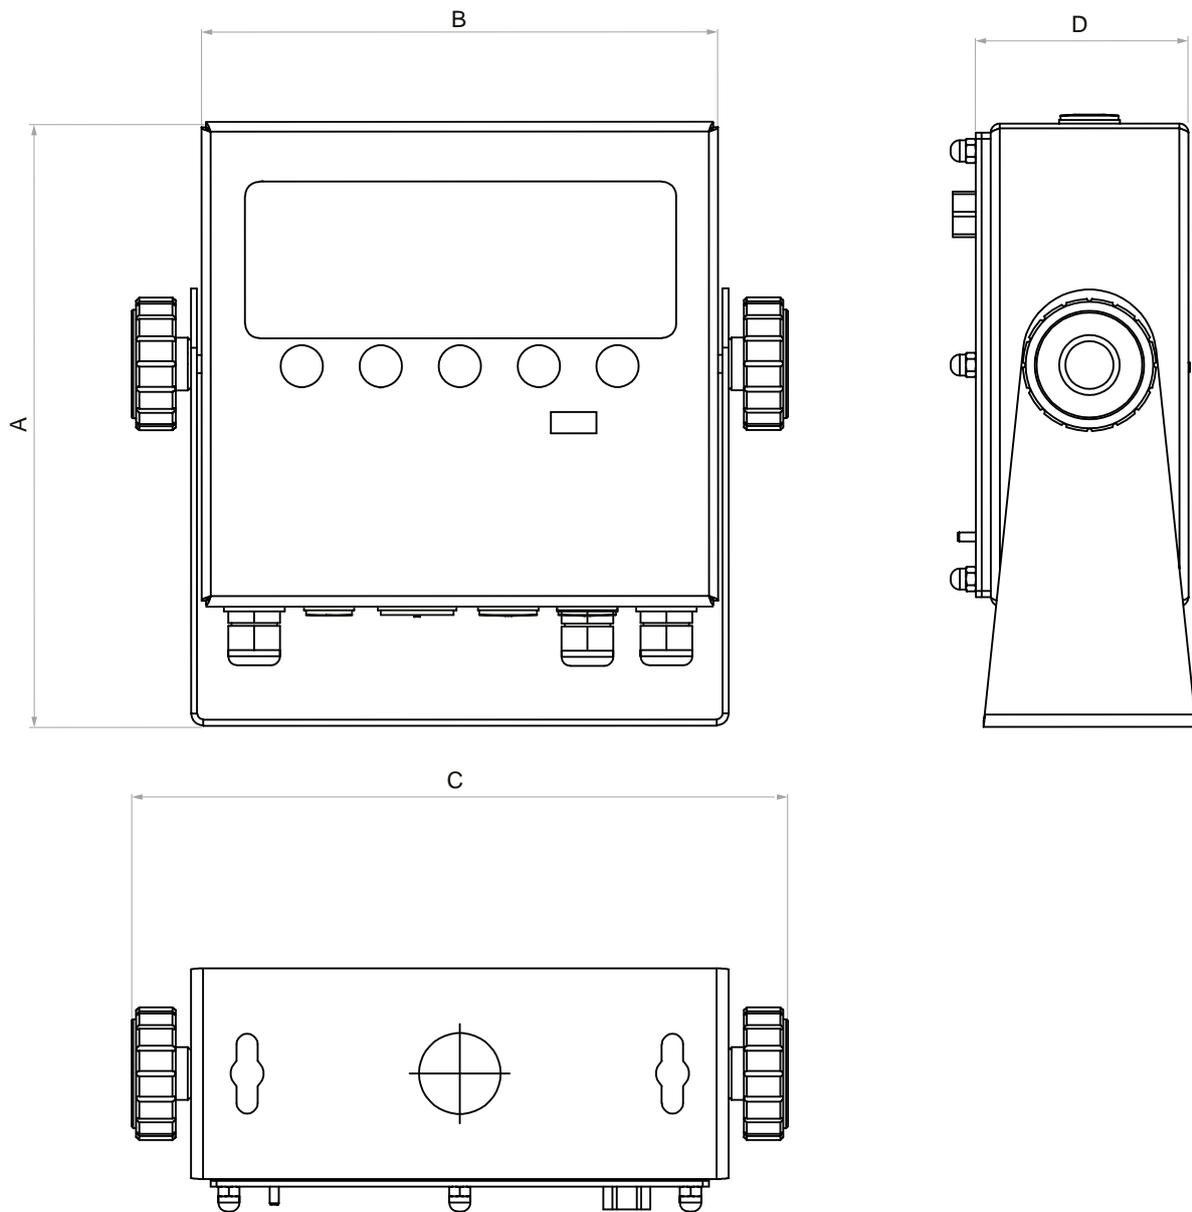

Dimensions			
A	200 mm	C	216 mm
B	170 mm	D	70 mm

DFWX HYGIENX®

21-KEY NUMERIC FUNCTION KEYBOARD AND INTERACTIVE BACKLIT LCD DISPLAY

Weight indicator with electropolished AISI 316 stainless steel case, with IP68 and IP69K protection rating to withstand high-pressure and high-temperature washing, ideal for industrial environments with high hygiene requirements. Compact and robust, it stands out for its numerous connectivity options and versatility.



IP68



IP69K

AISI 316
STAINLESS STEEL

HYGIENX®

Version codes

	DESCRIPTION	CODE	
	Multifunction weight indicator specifically designed for environments with high hygiene requirements, with 110-240 Vac EU plug power supply. AISI 316 stainless steel case, IP68/IP69K protection. 25 mm RGB display.	DFWX-HGX	
	Multifunction weight indicator specifically designed for environments with high hygiene requirements, with 110-240 Vac EU plug power supply and integrated rechargeable battery. AISI 316 stainless steel casing, IP68/IP69K protection. 25 mm RGB display.	DFWXB-HGX	

Why choose

- Interactive 6-digit 25mm LCD display with RGB backlighting (7 selectable colors)
- 21-key numeric-function keyboard
- Configurable energy-saving features
- Ideal for environments with high hygiene standards
- Enhanced connectivity
- Shortcuts available for simplified configuration
- Using multiple serial ports simultaneously
- Versions with battery, Ethernet port, or WiFi port available
- Internal power supply 110-230 Vac
- Compact dimensions: 170 x 200 x 70 mm
- New multifunction program

* For Chinese and Greek, printer/labeller programming is required (S1, only during order phase).

** These quick menu access keys can be inhibited by configuring a dedicated password.

Main features

COMMUNICATION PORTS - INPUTS/OUTPUTS:

- RS232 on screw terminals for connection to PC/printers Dini Argeo
- RS485 on screw terminals for connection to PC/PLC, with Modbus RTU or ASCII protocol
- USB-C for PC connection

OPTIONALS:

- Ethernet TCP/IP (Includes Modbus-TCP protocol) (requires wiring of RJ45 connector on cable)
- RadioFrequency 2.4GHz (to be combined with carrier board)
- Wireless Personal Area Network (to be combined with carrier board code CBD)
- WiFi
- Analog output 4...20mA o 0...10V (to be combined with carrier board)
- Alibi Memory

NEW MULTIFUNCTIONAL PROGRAM:

New multifunction weighing program that allows you to use multiple functions simultaneously:

- Weight conversion to lb, N/kN or custom
- Piece counting during loading or unloading
- Weight control of loaded or unloaded pieces, with thresholds programmable via keyboard or communication protocol
- Totalization of weight-pieces
- Automatic tare function

MEASUREMENT AND METROLOGICAL CHARACTERISTICS:

- Connectable to up to 16 load cells with 350 Ω output resistance.
- Single-range, multi-range or multi-interval approvable, Class III or IIII, up to 10,000e per range. Minimum signal 0.3μV/e.
- Calibration up to Max. 800,000 divisions, for internal factory use; Minimum signal 0.01 μV/e.
- Internal resolution up to 3,000,000 points, ideal for high resolution applications and accurate part counting.
- Up to 8 points of signal linearization.
- Digital calibration and set-up from keyboard or PC with DINITOOLS.
- Functions for silo and tank calibration
- Weighing recording approved for data exchange with PC and Management, via Alibi Memory option or D-LEGAL PC software.


Technical features

Multifunction program	•
Weighbridge program	-
Program for weighing vehicle wheels and axles	-
Dosing program	-
RS232/C bidirectional port	•
RS485 serial port	•
Bidirectional serial port on fiber optics	-
USB connection for PC	•
Ethernet TCP/IP	•
Wi-Fi	•
USB key for saving weighings	-
Wireless Personal Area Network (WPAN) interface	Upon request
Thermal printer	•
Clock and calendar	•
Label printing	•
Inputs	•x2
Outputs	•x6
Analog output 4...20 mA, 0...10 Vdc	•
Backlit LCD display	•
Specific display	•
Keyboard	Mechanical
Enclosure	AISI 316 stainless steel
IP protection	IP68 and IP69K
Power supply board	3,3 ÷ 16 V
Indicator power supply	Internal 110-230 Vac
Internal rechargeable LiPo battery (up to 100 hours of battery life depending on the model and mode of use)	•
Adjustable tilt bracket	•
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	1
No. Analog load cells	16 with 350 Ω
OIML R76 / R51 - MID / R134 certifications	-

Approvals

- EU Type Examination Certificate (45501:2015)

Technical drawing (mm)

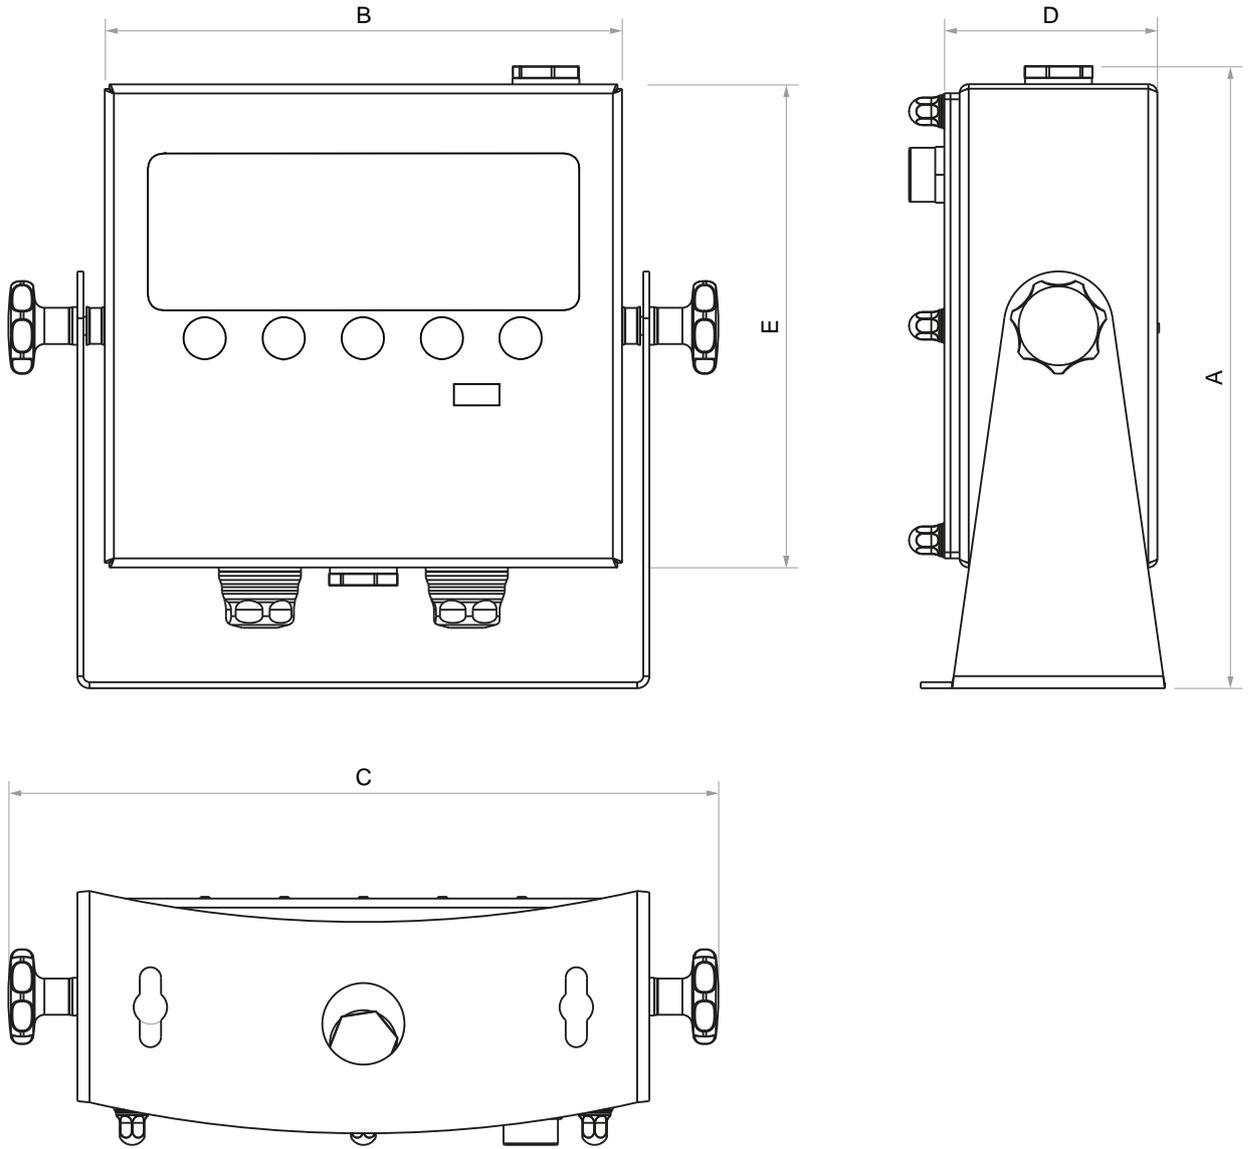

Dimensions			
A	206 mm	D	70 mm
B	170 mm	E	160 mm
C	233,4 mm		

WEIGHT INDICATORS
3590 SERIES
DFW SERIES
INDUSTRIAL PCS
6116 SERIES
OTHER INSTRUMENTS
WEIGHT REPEATERS
WEIGHT TRANSMITTERS
PC SOFTWARE

DFWXS

5-KEY MECHANICAL KEYBOARD AND INTERACTIVE BACKLIT LCD DISPLAY

AISI 304 stainless steel weight indicator with IP68 and 69K protection rating to withstand dust and high-pressure, high-temperature water jets. Versatile and compact, it is designed to meet simple weighing applications and requirements in industrial environments, such as weighing and weight conversion.



IP68



IP69K



AISI 304
STAINLESS STEEL



Version codes

	DESCRIPTION	CODE	
	Multifunction weight indicator with 110-230 Vac power supply and EU Plug, with built-in rechargeable NiMh battery. Stainless steel case. 25 mm RGB display.	DFWXS B	

Why choose

- Interactive 6-digit 25mm LCD display with RGB backlighting (7 selectable colors)
- 5-key “smart” mechanical keyboard
- Configurable energy-saving features
- Enhanced connectivity
- Using multiple serial ports simultaneously
- Internal power supply 110-230 Vac
- Compact dimensions: 170 x 200 x 70 mm
- New multifunction program
- Rechargeable battery, approximately 100 hours of battery life

Main features

COMMUNICATION PORTS - INPUTS/OUTPUTS:

- RS232 on RJ45/screw terminals for connection to PC/printers Dini Argeo
- RS232 on AMP connector, with CTS, for connection to Dini Argeo printers
- RS485 on screw terminals for connection to PC/PLC, with Modbus RTU or ASCII protocol
- USB-C for connection to PC
- Theoretical calibration
- Silo calibration
- Manual calibration
- Quick calibration adjustment

OPTIONALS:

- Ethernet TCP/IP port (Includes Modbus-TCP protocol)
- WiFi Port
- RadioFrequency 2.4GHz
- Wireless Personal Area Network (WPAN)
- 4...20mA or 0...10V analog output
- Expansion board with 2 IN and 6 OUT digital

NEW MULTIFUNCTION PROGRAM:

- New multifunction weighing program that allows you to use multiple functions simultaneously:
- Weight conversion in lb, Newton or with freely programmable conversion factor
 - Hold
 - Peak (in kg or Newton)
 - Animal weighing
 - Piece counting
 - Pieces control
 - Weight control (net, gross, take-away, on zero)
 - Percentage weighing
 - Totalization in loading or unloading
 - Manual formulation
 - Automatic Tare function

MEASUREMENT AND METROLOGICAL CHARACTERISTICS

- Connectable to up to 16 load cells with 350 Ω output resistance.
- Single-range, multi-range or multi-interval approvable, Class III or IIII, up to 10,000e per range. Minimum signal 0.3 μV/e.
- Calibration up to Max. 800,000 divisions, for internal factory use; Minimum signal 0.01 μV/e.
- Internal resolution up to 3,000,000 points, ideal for high resolution applications and accurate part counting.
- Calibration in Newtons (for internal use only).
- Theoretical calibration.
- Calibration for silos and hoppers.
- Up to 8 points of signal linearization.
- Digital calibration and set-up from keyboard or PC with DINITOOLS.
- Weighing recording approved for data exchange with PC and Management, via Alibi Memory option or D-LEGAL PC software.

Technical features

Multifunction program	•
Weighbridge program	-
Program for weighing vehicle wheels and axles	-
Dosing program	-
RS232/C bidirectional port	• x2
RS485 serial port	•
Bidirectional serial port on fiber optics	-
USB connection for PC	•
Ethernet TCP/IP	○
Wi-Fi	○
USB key for saving weighings	-
Wireless Personal Area Network (WPAN) interface	○
Thermal printer	○
Clock and calendar	○
Label printing	○
Inputs	○ x2
Outputs	○ x6
Analog output 4...20 mA, 0...10 Vdc	○
Backlit LCD display	•
Specific display	•
Keyboard	Mechanical
Enclosure	AISI 304 stainless steel
IP protection	IP68 and IP69K
Power supply board	3,3 ÷ 16 V
Indicator power supply	Internal 110-230 Vac
Internal rechargeable NiMH battery (up to 100 hours of battery life depending on the model and mode of use)	•
Adjustable tilt bracket	•
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	1
No. Analog load cells	16 with 350 Ω
OIML R76 / R51 - MID / R134 certifications	-


Approvals

- EU Type Examination Certificate (45501:2015)

* For Chinese and Greek, printer/labeller programming is required (S1, only during order phase).

** These quick menu access keys can be inhibited by configuring a dedicated password.

Technical drawing (mm)

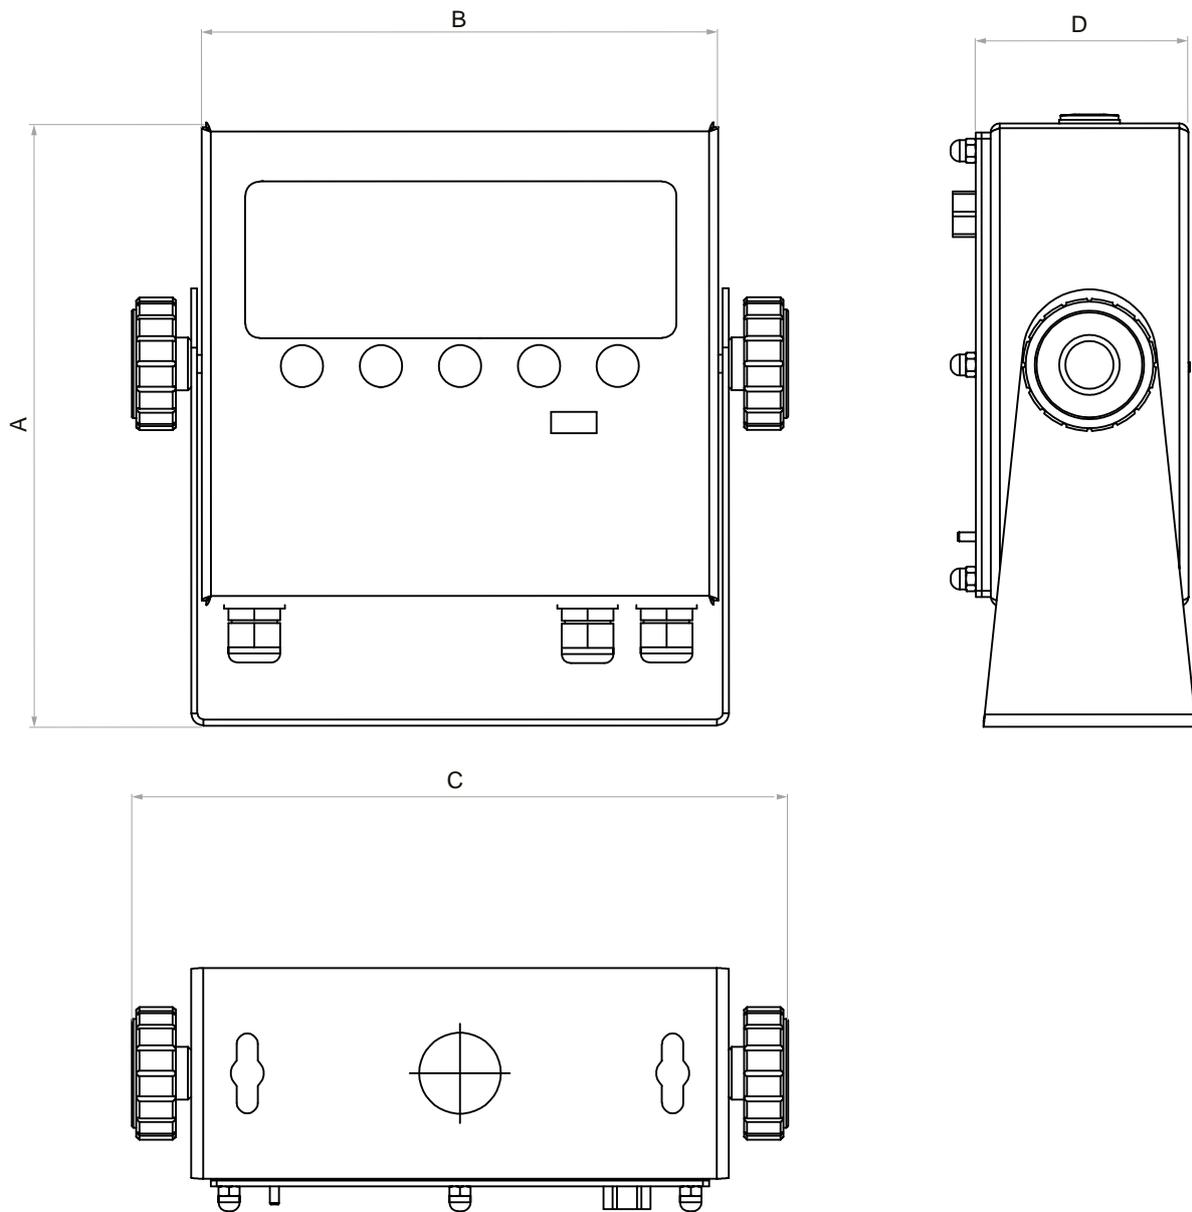

Dimensions			
A	200 mm	C	216 mm
B	170 mm	D	70 mm

DFWK HYGIENX®

WATERPROOF KEYPAD AND BACKLIT LCD DISPLAY

Weight indicator in AISI 316 stainless steel with IP68 and IP69K protection rating, suitable for environments that require high hygiene standards and thorough cleaning with high temperature and pressure water jets.



HYGIENX®



OIML
APPROVED



IP68



IP69K



AISI 316
STAINLESS STEEL

Version codes

	DESCRIPTION	CODE	
	17-key indicator specifically for environments with high hygiene requirements. Housing in AISI 316 stainless steel, IP68/IP69K rating, backlit LCD display and rechargeable internal battery.	DFWK-HGX	

Why choose

- Enhanced data display thanks to backlit LCD with 6 high-contrast digits.
- Waterproof 17-key numeric-functional keypad.
- With rechargeable internal battery, up to 60 hours operating time.
- 6-key radio-frequency remote control: zero, tare, function on/off, print and switch-off.
- Dimensions: 280x143x185 mm.
- CE-M certifiable (OIML R-76 / EN 45501).

Main features

I/O SECTION:

- Configurable RS232/C bidirectional port for connection to remote printer/labeler.
- Configurable RS232/C (RS485 optional) bidirectional port for connection to PC, PLC, additional remote display or radio modem.

FUNCTIONS:

- Operating modes selectable directly by the user via a dedicated key*:
- High-resolution display x 10
 - Precision weighing with temporary recalibration by sample weight (for internal factory use)
 - Net/gross
 - Conversion lb/kg
 - Free conversion factor (for metre counter, litre counter, etc. systems)
 - Weight totalisation
 - Formulation
 - +/- control, with quick target and threshold entry

- Percentage weighing
- Dosage in percentage with programmable target
- Counter
- Hold
- Two-speed filling/dosing with zeroing at start (with DFIO optional)

Functions "alibi memory" and "setpoint" are available in combination with the desired operating mode, and are automatically activated at installation of the respective optional board; this way, it is possible to total, save each alibi memory weighing, and activate relay outputs.

* These quick menu access keys can be inhibited by configuring a dedicated password.


Technical features

Multifunction program	•
Program for weighbridges	-
Program for weighing wheels and vehicle axles	-
Program for dosing	-
RS232/C bidirectional port	• x2
RS485 serial port (replacing 1 x RS232 serial port)	○
Bidirectional serial port over fibre optic	-
USB connection for PC	○
TCP/IP Ethernet	○
Wi-Fi	-
USB flash drive to save weighings	-
Wireless Personal Area Network (WPAN) interface	○
Thermal printer	○
Time and date	○
Printing labels	•
Inputs	○ x2
Outputs	○ x6
Analogue output 4...20 mA, 0...10 Vdc	-
Backlit LCD display	•
Specific display	-
Keypad	Mechanical
Case	AISI 316 stainless steel
IP rating	IP68 and IP69K
Board power supply	5 ÷ 12 V
Indicator / battery charger power supply	110-240 Vac
Internal battery	•
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	1
No. analogue load cells	8 x 350 Ω 16 x 700 Ω
OIML R76 / R51 - MID / R134 approvals	•

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- Australian Pattern Approval (NMI)
- IP68 and IP69K protection rating

Technical drawing (mm)

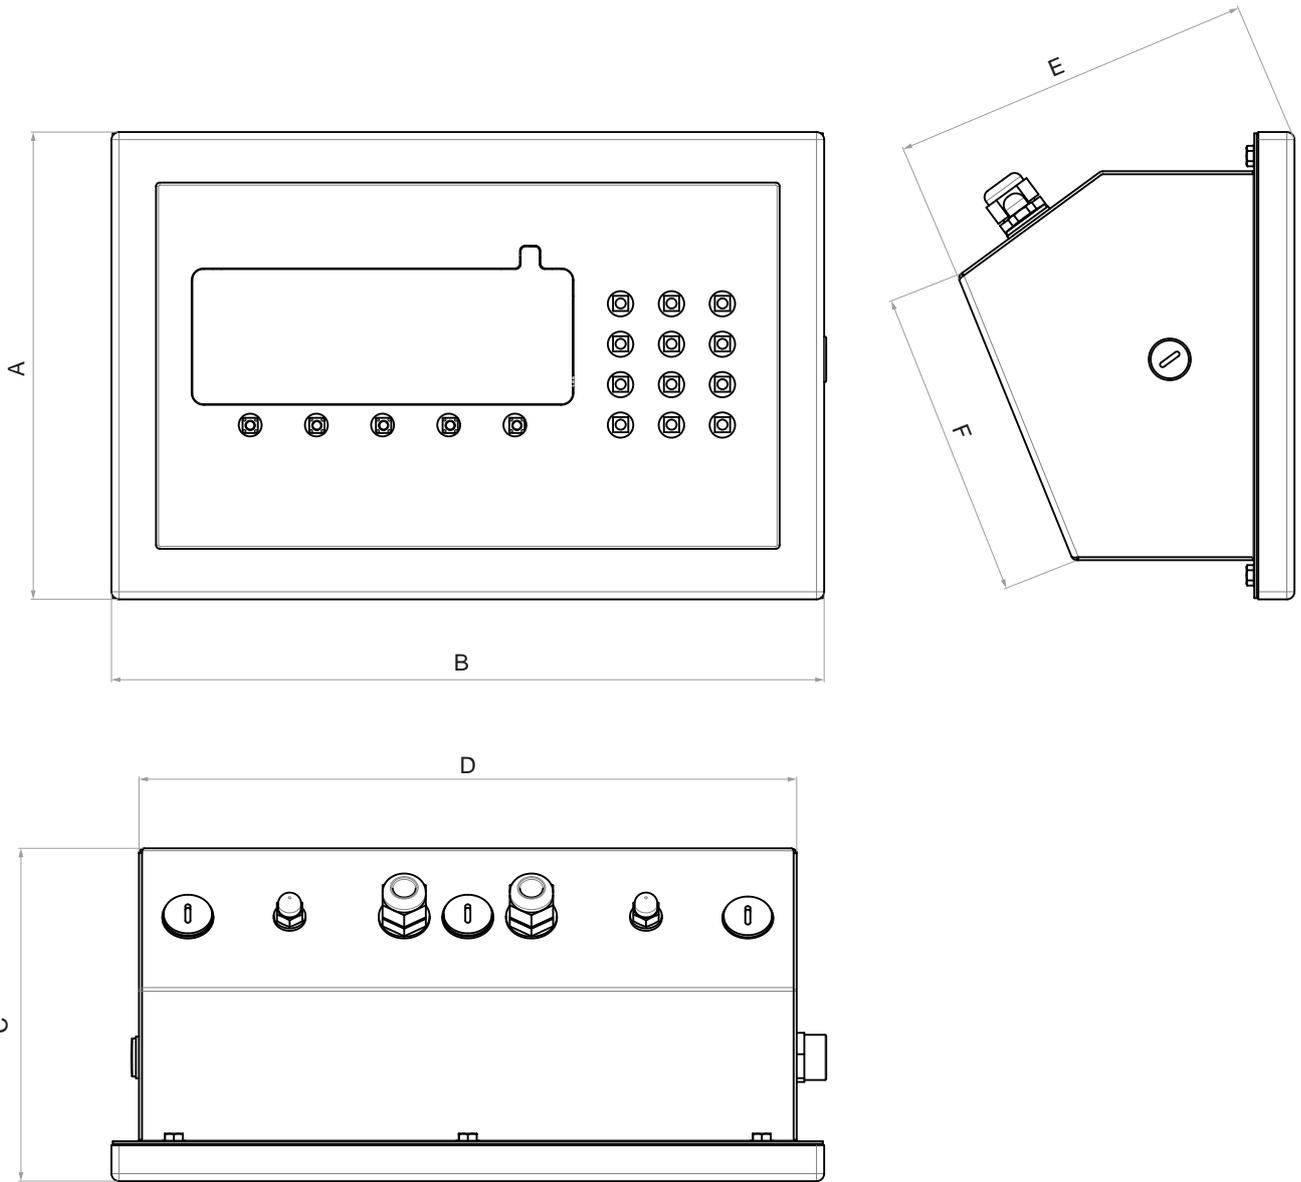

Dimensions			
A	185 mm	D	258 mm
B	280 mm	E	143 mm
C	132 mm	F	122 mm

WEIGHT INDICATORS | 3590 SERIES | DFW SERIES | INDUSTRIAL PCS | 6116 SERIES | WEIGHT REPEATERS | OTHER INSTRUMENTS | WEIGHT TRANSMITTERS | PC SOFTWARE

DFWL

WATERPROOF KEYPAD AND BACKLIT LCD DISPLAY

Digital weight indicator, intuitive programming and use, suitable for multiple applications, industrial and commercial. Stands out for its versatility, with a wide choice of available functions and particularly suitable for mobile weighing systems, such as hand pallet jacks and forklifts.



Version codes

	DESCRIPTION	CODE	
	Weight indicator in ABS with 5-key keypad. Backlit LCD and standard weighing program.	DFWL-1	

Why choose

- Case in IP54 ABS, easy to wash and sturdy.
- 6-digit, 25-mm backlit LCD display and 5-key functional waterproof keypad.
- With RS232/C bidirectional port on RJ11 connector for quick connection on screw terminals, configurable for PC, PLC, additional remote display.
- CE-M certifiable (OIML R-76 / EN 45501).

Main features

LANGUAGES AVAILABLE IN PRINTER:

- IT, EN, FR, DE, ES, PT, CN*, EL*

FUNCTIONS:

- Operating modes directly selectable by the user, via dedicated key**:
- High-resolution display x 10
 - Precision weighing with temporary recalibration by sample weight (for internal factory use)
 - Net/gross
 - Conversion lb/kg
 - Free conversion factor (for metre counter, litre counter, etc. systems)
 - Weight totalisation
 - Formulation
 - +/- control, with quick target and threshold entry
 - Percentage weighing
 - Counter
 - Hold

Function "alibi memory" is available in combination with the desired operating mode, and is automatically activated at installation of the respective optional board.

ADDITIONAL FUNCTIONS:

- PEAK, peak weight measurement (code DFWPK)
- Conversion Newton-kg (code DFWPK)

Access to user menu via a dedicated key**, for setting weighing filter, date and time, setpoint and tare accessible to the user, with programmable login password.

* For Chinese and Greek, printer/labeller programming is required (S1, only during order phase).
 ** These quick menu access keys can be inhibited by configuring a dedicated password.


Technical features

Multifunction program	●
Program for weighbridges	-
Program for weighing wheels and vehicle axles	-
Program for dosing	-
RS232/C bidirectional port	● x2
RS485 serial port (replacing 1 x RS232 serial port)	○
Bidirectional serial port over fibre optic	-
USB connection for PC	○
TCP/IP Ethernet	-
Wi-Fi	-
USB flash drive to save weighings	-
Wireless Personal Area Network (WPAN) interface	○
Thermal printer	○
Time and date	○
Printing labels	●
Inputs	-
Outputs	-
Analogue output 4...20 mA, 0...10 Vdc	-
Backlit LCD display	●
Specific display	-
Keypad	Mechanical
Case	ABS
IP rating	IP54
Board power supply	Standard: 5 ÷ 12 V PLUS: 3.5 ÷ 12 V
Indicator / battery charger power supply	110-240 Vac
Internal battery	4 x AA batteries
Adjustable tilt bracket	●
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	1
No. analogue load cells	6 x 350 Ω 16 x 700 Ω
OIML R76 / R51 - MID / R134 approvals	●

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- Australian Pattern Approval (NMI)

Technical drawing (mm)

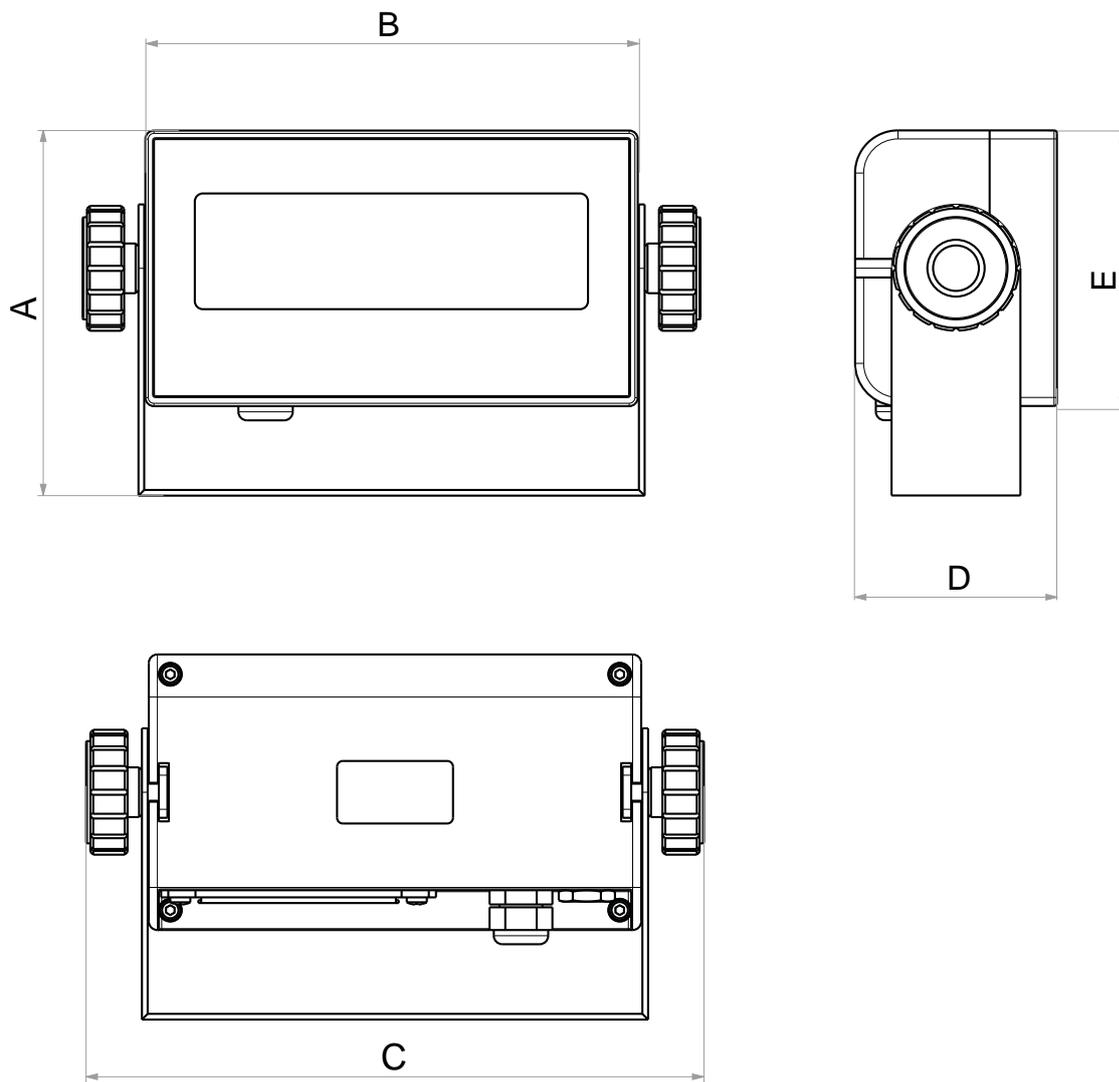

Dimensions			
A	129 mm	D	71 mm
B	172 mm	E	97 mm
C	216 mm		

DFWLB

WATERPROOF KEYPAD AND BACKLIT LCD DISPLAY

DFWLB digital weight indicator, easy to install and use, for industrial settings. Suitable for mobile and automotive weighing applications, thanks to the standard, long-life internal battery.



OIML
APPROVED



IP68



ABS



UNIVERSAL
BRACKET

Version codes

	DESCRIPTION	CODE	
	IP68 weight indicator with rechargeable internal battery. Housing in ABS, 5-key keypad, backlit LCD display.	DFWLB-3	
	IP68 DFWLB-3 weight indicator with rechargeable internal battery. Housing in ABS, 5-key keypad, backlit LCD display. Power cable with BS1363 plug (UK plug).	DFWLBK	

Why choose

- Case in IP68 ABS, easy to clean and resistant to corrosive environments.
- 6-digit, 25-mm backlit LCD display and 5-key functional waterproof keypad.
- Suitable for use on bench, column or wall, with a support bracket with adjustable tilt as standard.
- 1 x RS232/C bidirectional port on RJ11 connector for quick connection (RS485 optional) on screw terminals, configurable for PC, PLC, additional remote display.
- 1 x configurable RS232/C bidirectional port for connection to printer or labeller.
- CE-M certifiable (OIML R-76 / EN 45501).

Main features

LANGUAGES AVAILABLE IN PRINTER:

- IT, EN, FR, DE, ES, PT, CN*, EL*

FUNCTIONS:

- Operating modes directly selectable by the user, via dedicated key**:
- High-resolution display x 10
 - Precision weighing with temporary recalibration by sample weight (for internal factory use)
 - Net/gross
 - Conversion lb/kg
 - Free conversion factor (for metre counter, litre counter, etc. systems)
 - Weight totalisation
 - Formulation
 - +/- control, with quick target and threshold entry
 - Percentage weighing
 - Counter
 - Hold

Function "alibi memory" is available in combination with the desired operating mode, and is automatically activated at installation of the respective optional board.

ADDITIONAL FUNCTIONS:

- PEAK, peak weight measurement (code DFWPk)
- Conversion Newton-kg (code DFWPk)

Access to user menu via a dedicated key**, for setting weighing filter, date and time, setpoint and tare accessible to the user, with programmable login password.

* For Chinese and Greek, printer/labeller programming is required (\$1, only during order phase).

** These quick menu access keys can be inhibited by configuring a dedicated password.


Technical features

Multifunction program	•
Program for weighbridges	-
Program for weighing wheels and vehicle axles	-
Program for dosing	-
RS232/C bidirectional port	• x2
RS485 serial port (replacing 1 x RS232 serial port)	○
Bidirectional serial port over fibre optic	-
USB connection for PC	○
TCP/IP Ethernet	-
Wi-Fi	-
USB flash drive to save weighings	-
Wireless Personal Area Network (WPAN) interface	○
Thermal printer	○
Time and date	○
Printing labels	•
Inputs	-
Outputs	-
Analogue output (4...20 mA, 0...10 Vdc)	-
Backlit LCD display	•
Specific display	-
Keypad	Mechanical
Case	ABS
IP rating	IP68
Board power supply	5 ÷ 12 V
Indicator / battery charger power supply	110-240 Vac
Internal battery	○
Adjustable tilt bracket	•
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	1
No. analogue load cells	7 x 350 Ω 16 x 700 Ω
OIML R76 / R51 - MID / R134 approvals	•

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- Australian Pattern Approval (NMI)

Technical drawing (mm)

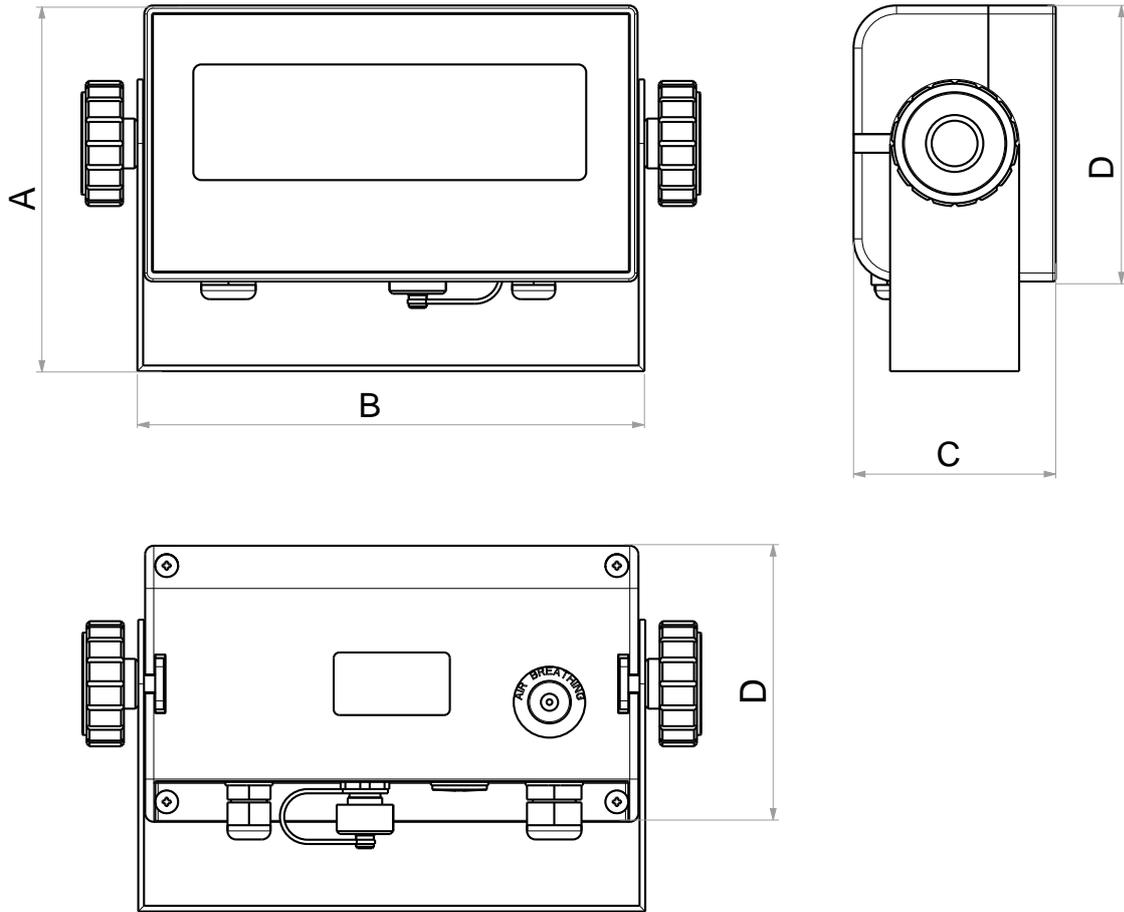

Dimensions			
A	129 mm	D	71 mm
B	172 mm	E	97 mm
C	216 mm		

DFWLI

WATERPROOF KEYPAD AND BACKLIT LCD DISPLAY

High-performance weight indicator, especially suited for industrial and commercial weighing, such as floor scales and weighing in motion. With a stainless steel case and IP68 protection rating, it is waterproof, easy to clean and rugged. Offers a wide range of functions, including weight totalisation, piece-counting, and percentage dosing with programmable target.



Version codes

	DESCRIPTION	CODE	
	Weight indicator with 5-key keypad. IP68 stainless steel housing, backlit LCD and standard weighing program.	DFWLI-2	
	Weight indicator with 17-key keypad. IP68 stainless steel housing, backlit LCD and standard weighing program.	DFWLI-2	

Why choose

- Waterproof 5/17-key keypad.
- High-contrast, 6-digit, 25-mm backlit LCD display.
- Configurable RS232/C bidirectional port for connection to printer/labeller, or solidly connected printer.
- Configurable RS232/C (RS485 optional) bidirectional port for connection to PC, PLC, additional remote display or radio modem. RJ connector for quick connection.
- CE-M certifiable (OIML R-76 / EN 45501).

Main features

LANGUAGES AVAILABLE IN PRINTER:

- IT, EN, FR, DE, ES, PT, CN*, EL*

FUNCTIONS:

- Operating modes directly selectable by the user, via dedicated key**:
- High-resolution display x 10
 - Precision weighing with temporary recalibration by sample weight (for internal factory use)
 - Net/gross
 - Conversion lb/kg
 - Conversion Newton-kg
 - Free conversion factor (for metre counter, litre counter, etc. systems) Weight totalisation
 - Weight totalisation
 - Formulation
 - +/- control, with quick target and threshold entry
 - Percentage weighing
 - Dosage in percentage with programmable target
 - Counter
 - Hold

Functions "alibi memory" and "setpoint" are available in combination with the desired operating mode, and are automatically activated at installation of the respective optional board; this way, it is possible to total, save each alibi memory weighing, and activate relay outputs to control automation.

ADDITIONAL FUNCTIONS:

- PEAK, peak weight measurement (code DFWPK)
- Conversion Newton-kg (code DFWPK)

Access to user menu via a dedicated key**, for setting weighing filter, date and time, setpoint and tare accessible to the user, with programmable login password.

* For Chinese and Greek, printer/labeller programming is required (S1, only during order phase).

** These quick menu access keys can be inhibited by configuring a dedicated password.

Technical features


Multifunction program	●
Program for weighbridges	-
Program for weighing wheels and vehicle axles	-
Program for dosing	-
RS232/C bidirectional port	● x2
RS485 serial port (replacing 1 x RS232 serial port)	○
Bidirectional serial port over fibre optic	-
USB connection for PC	○
TCP/IP Ethernet	○
Wi-Fi	●
USB flash drive to save weighings	-
Wireless Personal Area Network (WPAN) interface	○
Thermal printer	○
Time and date	○
Printing labels	○
Inputs	○ x2
Outputs	○ x6
Analogue output 4...20 mA, 0...10 Vdc	○ *****
Backlit LCD display	●
Specific display	-
Keypad	Mechanical
Case	AISI 304 stainless steel
IP rating	IP68
Board power supply	Standard: 5 ÷ 12 V PLUS: 3.5 ÷ 12 V
Indicator / battery charger power supply	110-240 Vac
Internal battery	-
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	1
No. analogue load cells	8 x 350 Ω 16 x 700 Ω
OIML R76 / R51 - MID / R134 approvals	●

***** Only in version PLUS

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- Australian Pattern Approval (NMI)

Technical drawing (mm)

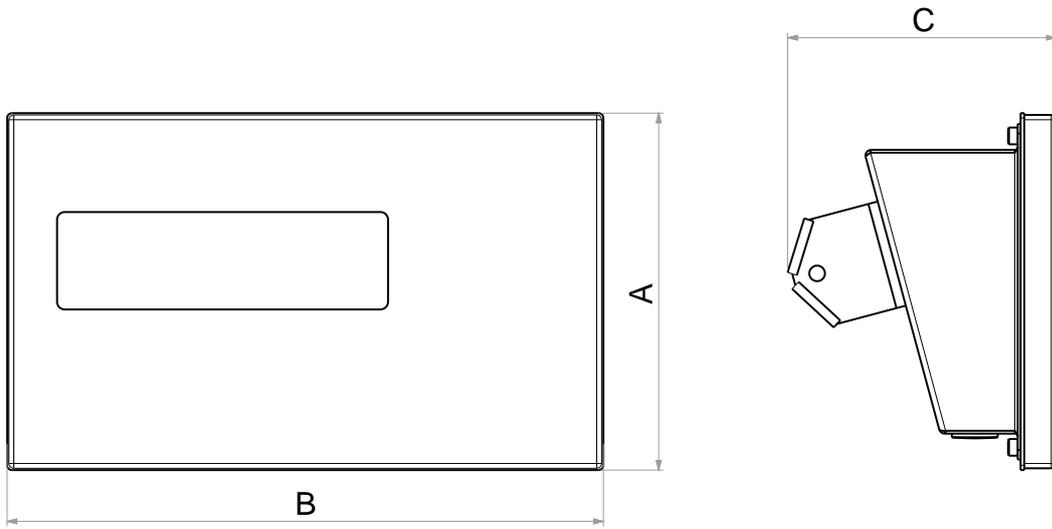

Dimensions			
A	149 mm	C	111 mm
B	248 mm		

DFWXP

WATERPROOF KEYPAD AND BACKLIT LCD DISPLAY

Weight indicator suitable for multiple applications, thanks to wide choice of available operating modes and interfaces. With case in IP65 ABS, easy to wash and resistant to harsh environments. The operator may also take advantage of MASTER mode, specifically for using the indicator as a universal weight repeater, or multi-scale in combination with DFW/DGT/MCW.



Version codes

	DESCRIPTION	CODE	
	5-key indicator. Housing in IP65 ABS, backlit LCD display.	DFWXP	
	17-key indicator. Housing in IP65 ABS, backlit LCD display.	DFWKXP	
	17-key indicator, with solidly connected printer, calendar clock. Housing in ABS, backlit LCD display.	DFWKXPX	
	5-key indicator, with external power supply unit. NOT INCLUDED: internal battery, RJ45 port, cable glands and plugs. No factory-installed options.	DFW-1	

Why choose

- Waterproof 5-key functional or 17-key numeric-functional keypad.
- Configurable RS232/C bidirectional port for connection to printer/labeller, or solidly connected printer.
- Configurable RS232/C (RS485 optional) bidirectional port for connection to PC, PLC, additional remote display or radio modem. RJ connector for quick connection.
- IR input available only for models with simplified 5-key keypad.
- Standard rechargeable internal battery.
- CE-M certifiable (OIML R-76 / EN 45501).
- High-contrast, 6-digit, 25-mm backlit LCD display.

Main features

LANGUAGES AVAILABLE IN PRINTER:

- IT, EN, FR, DE, ES, PT, CN*, EL*

FUNCTIONS:

Operating modes directly selectable by the user, via dedicated key**:

- High-resolution display x 10
- Precision weighing with temporary recalibration by sample weight (for internal factory use)

- Net/gross
- Conversion lb/kg
- Free conversion factor (for metre counter, litre counter, etc. systems)
- Weight totalisation
- Formulation
- +/- control, with quick target and threshold entry
- Percentage weighing
- Dosage in percentage with programmable target
- Counter
- Hold

- Two-speed filling/dosing with zeroing at start (with DFIO optional)

Functions "alibi memory" and "setpoint" are available in combination with the desired operating mode, and are automatically activated at installation of the respective optional board; this way, it is possible to total, save each alibi memory weighing, and activate relay outputs to control automation.

ADDITIONAL FUNCTIONS:

- PEAK, peak weight measurement (code DFWPK)
- Conversion Newton-kg (code DFWPK)
- Input-output (upon request).

Access to user menu via a dedicated key**, for setting weighing filter, date and time, setpoint and tare accessible to the user, with programmable login password.

* For Chinese and Greek, printer/labeller programming is required (S1, only during order phase).

** These quick menu access keys can be inhibited by configuring a dedicated password.

Technical features




Multifunction program	●
Program for weighbridges	-
Program for weighing wheels and vehicle axles	-
Program for dosing	-
RS232/C bidirectional port	● x2
RS485 serial port (replacing 1 x RS232 serial port)	○
Bidirectional serial port over fibre optic	-
USB connection for PC	○
TCP/IP Ethernet	○
Wi-Fi	○
USB flash drive to save weighings	○
Wireless Personal Area Network (WPAN) interface	○
Thermal printer	○**
Time and date	○**
Printing labels	○
Inputs	○ x2
Outputs	○ x6
Analogue output 4...20 mA, 0...10 Vdc	○
Backlit LCD display	●
Specific display	-
Keypad	Membrane
Case	ABS
IP rating	IP65
Board power supply	Battery: 6 V Power: 12 V
Indicator / battery charger power supply	110-240 Vac
Internal battery	○
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	1
No. analogue load cells	8 x 350 Ω 16 x 700 Ω
OIML R76 / R51 - MID / R134 approvals	●

** Standard in versions DFWXP and DFWKXP, optional in other versions

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- Australian Pattern Approval (NMI)

Technical drawing (mm)

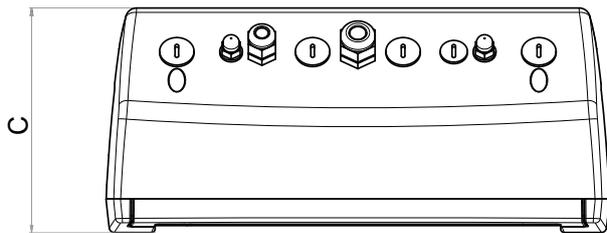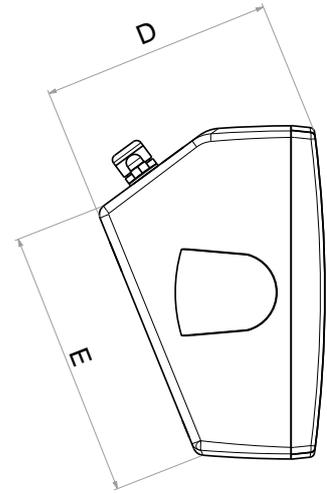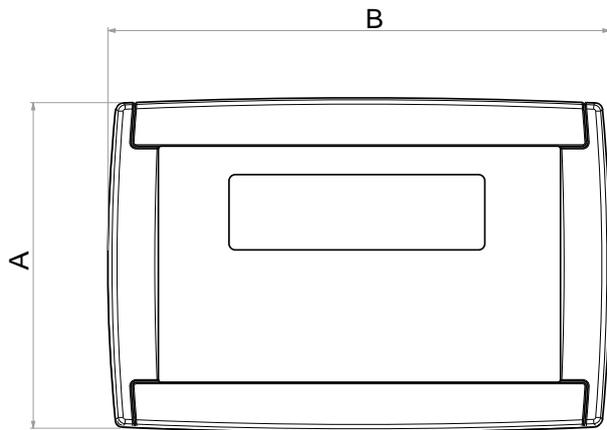

Dimensions

A	184 mm	D	128 mm
B	278 mm	E	150 mm
C	120 mm		

DFWKRP

WATERPROOF KEYPAD AND BACKLIT LCD DISPLAY

The multifunction digital DFWKRP weight indicator is recommended for vehicle weighing system applications. It comes standard with a carrying case complete with storage compartment for easy transport, calendar clock, thermal printer, rechargeable internal battery, and 4 connectors for connecting platforms.



Version codes

	DESCRIPTION	CODE	
	Only for analogue WWS (WWS...-y). Weight indicator in carrying case, with integrated printer. With specific program for weighing vehicles, 17-key keypad, backlit LCD display and calendar clock. Available only in combination with Dini Argeo vehicle weighing systems (WWS, RWS, DTW, WBSA series).	DFWKRP-3	
	Only for Radio-frequency WWS (WWS...2G4-y). Weight indicator in carrying case, with integrated printer. With specific program for weighing vehicles, 17-key keypad, backlit LCD display, calendar clock and radio module. Available only in combination with Dini Argeo vehicle weighing systems (WWS, RWS, DTW, WBSA series).	DFWKR2G4-1	

Why choose

- Waterproof 17-key functional keypad.
- High-contrast, 6-digit, 25-mm backlit LCD display.
- Rack-type metal case.
- Dimensions: 325x460x170 mm.
- Total weight: approx. 5 kg.
- CE-M certifiable (OIML R-76 / EN 45501).

Main features

I/O SECTION:

• Available on panel:

9-pin RS232 bidirectional port (RS485 optional) for connection to PC.

• Available inside indicator:

Configurable RS232/C bidirectional port for connection to printer.

FUNCTIONS:

KEYPAD

- Zero cycle on all connected platforms
- Display of weight of each platform (up to 4), of total weight, or of each platform combination
- Display of weight of each axle and of total
- Simple vehicle weighing with printout of weights of each wheel and of total
- Totalisation of Tractor + Trailer, with printout of subtotals and vehicle total
- Static axle totalisation, with printout of weight of each individual axle and vehicle total
- Simple Input/Output
- Input/Output with axle totalisation
- Grand total of vehicles weighed
- Calculation and printout of centre of gravity

PRINTING

Configurable print layout with:

- 4 header lines
- Weight of each platform and sum of any combination thereof
- Total vehicle weight
- Grand total vehicles weighed
- Coordinates of vehicle centre of gravity
- Receipt number
- Number of weighings
- Barcode type Code 39
- Date and time

REMOTE CONTROL

- 19-key infrared remote control: zero, tare / manual tare, function on/off, print, switch off
- 6-key radio-frequency remote control: zero, tare, function on/off, print, switch off


Technical features

Multifunction program	-
Program for weighbridges	-
Program for weighing wheels and vehicle axles	●
Program for dosing	-
RS232/C bidirectional port	● x2
RS485 serial port (replacing 1 x RS232 serial port)	○
Bidirectional serial port over fibre optic	-
USB connection for PC	○
TCP/IP Ethernet	○
Wi-Fi	○
USB flash drive to save weighings	○
Wireless Personal Area Network (WPAN) interface	○
Thermal printer	●
Time and date	●
Printing labels	-
Inputs	-
Outputs	-
Analogue output 4...20 mA, 0...10 Vdc	○
Backlit LCD display	●
Specific display	-
Keypad	Membrane
Case	ABS
IP rating	IP40
Board power supply	Battery: 6 V Power: 12 V
Indicator / battery charger power supply	110-240 Vac
Internal battery	●
Adjustable tilt bracket	-
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	4
No. analogue load cells	25 x 1000 Ω
OIML R76 / R51 - MID / R134 approvals	●

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- Australian Pattern Approval (NMI)

Technical drawing (mm)

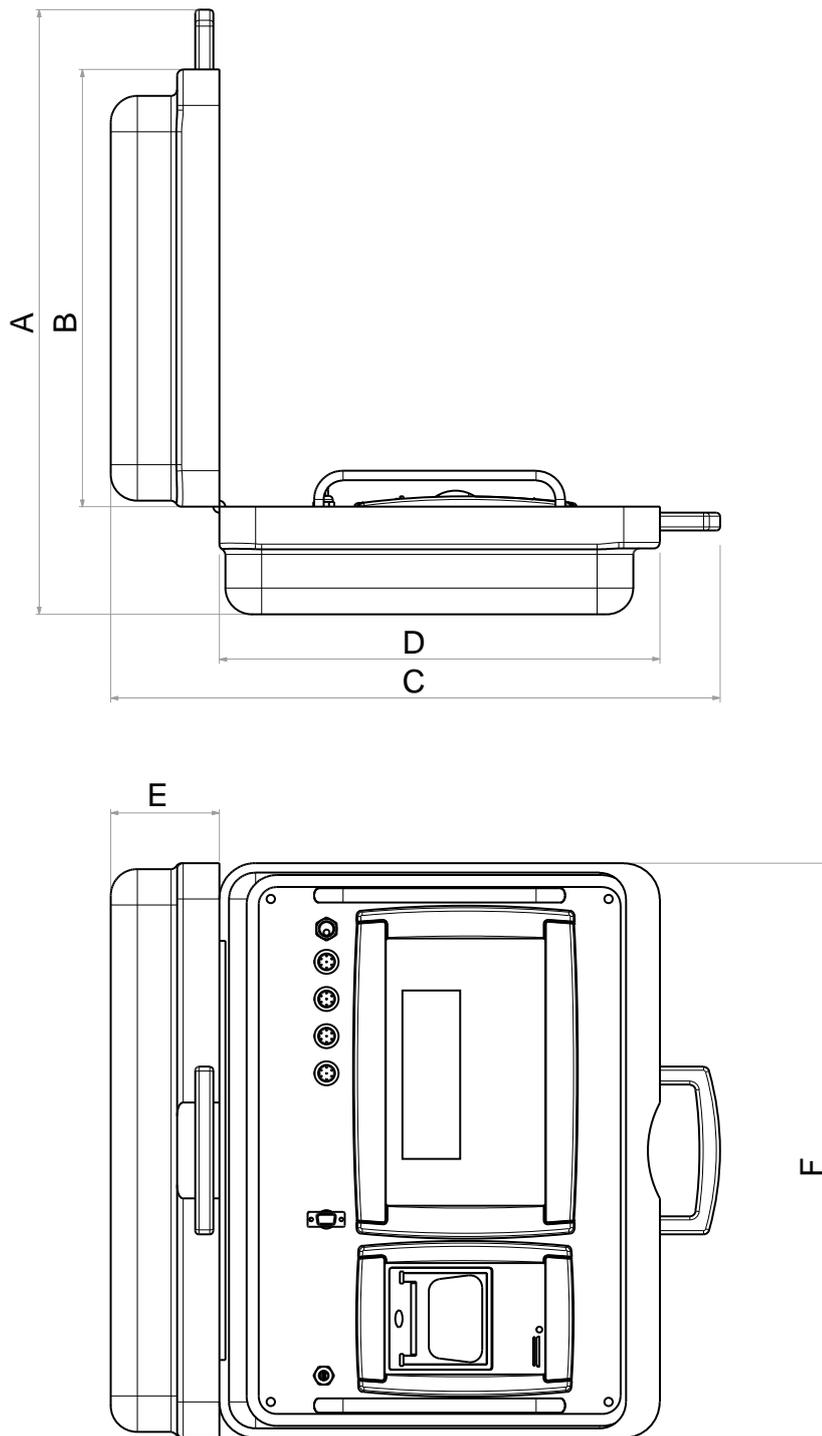

Dimensions

A	505 mm	D	365 mm
B	365 mm	E	90 mm
C	505 mm	F	480 mm

DFWDXT

6-DIGIT, 40-MM LED DISPLAY

The DFWDXT weight indicator features a large display with red LEDs for easy view of the weight even from a distance. The stainless steel case with IP68 protection rating ensures resistance against rain and dust, and is easy to clean. The DFWDXT is suitable for any type of industrial application, thanks to its versatility and multiple programs available.



OIML
APPROVED



IP68



STAINLESS
STEEL

Version codes

	DESCRIPTION	CODE	
	Indicator with LED matrix display (SMD technology). Housing in IP68 stainless steel, 5-key keypad and standard weighing program.	DFWDXTBC	

Why choose

- Features large 6-digit, 40-mm LED display.
- Up to 8 signal linearisation points.
- Brightness adjustable from software.
- Dimensions: 264x174x115 mm.
- Suitable for use on bench or wall.
- CE-M certifiable (OIML R-76 / EN 45501).

Main features

I/O SECTION:

- Configurable RS232/C bidirectional port for connection to printer/labeller, or solidly connected printer.
- Configurable RS232/C bidirectional port for connection to PC, PLC, additional remote display or radio modem (RS485 optional).
- Standard RJ connector for quick connection.

KEYPAD FUNCTIONS:

- Zero
- Automatic tare
- Presetable tare
- Print and/or send data
- Selected function command
- Power on/off

SELECTABLE FUNCTIONS:

- High-resolution display x 10
- Net/gross or conversion lb/kg
- Weight totalisation
- Formulation
- +/- control
- Percentage weighing
- Approved weight transmission to PC/PLC or storage on MMC/USB (with ALMEM Alibi memory option)
- Counter
- Hold
- Setpoint control (with DFIO option)


Technical features

Multifunction program	•
Program for weighbridges	-
Program for weighing wheels and vehicle axles	-
Program for dosing	-
RS232/C bidirectional port	• x2
RS485 serial port (replacing 1 x RS232 serial port)	○
Bidirectional serial port over fibre optic	-
USB connection for PC	○
TCP/IP Ethernet	○
Wi-Fi	○
USB flash drive to save weighings	○
Wireless Personal Area Network (WPAN) interface	○
Thermal printer	○
Time and date	○
Printing labels	•
Inputs	○ x2
Outputs	○ x6
Analogue output 4...20 mA, 0...10 Vdc	○
Backlit LCD display	-
Specific display	Super-bright red LEDs
Keypad	Membrane
Case	AISI 304 stainless steel
IP rating	IP68
Board power supply	Battery: 6 V Power: 12 ÷ 24 V
Indicator / battery charger power supply	110-240 Vac
Internal battery	•
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	1
No. analogue load cells	8 x 350 Ω 16 x 700 Ω
OIML R76 / R51 - MID / R134 approvals	•

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- Australian Pattern Approval (NMI)

Technical drawing (mm)

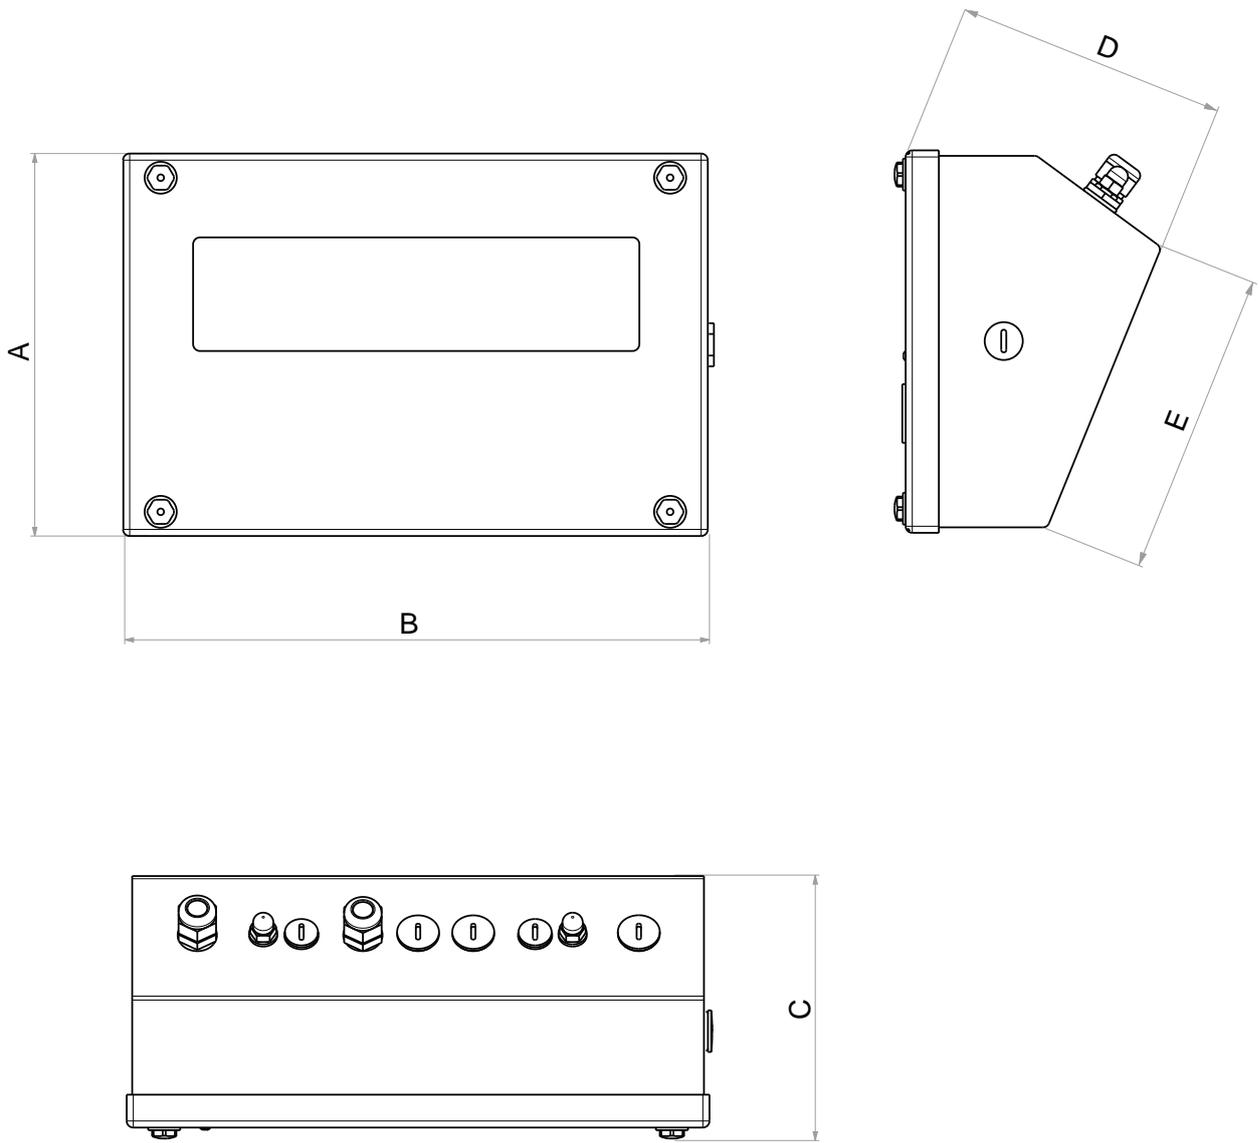

Dimensions

A	174 mm	D	125 mm
B	264 mm	E	139 mm
C	129 mm		

DFWKXT

WATERPROOF KEYPAD AND BACKLIT LCD DISPLAY

The DFWKXT weight indicator features a wide range of applications and interfaces that make it versatile and suitable for any type of industrial weighing application, such as floor scales, weigh-in-motion and much more.



Version codes

	DESCRIPTION	CODE	
	17-key keypad, in IP68 stainless steel. Backlit LCD and standard weighing program.	DFWKXTBC-1	

Why choose

- Waterproof 17-key numeric-functional keypad.
- Large, high-contrast, 6-digit, backlit LCD display.
- Features case in IP68 stainless steel, resistant against dust, water and corrosive environments. Easy to wash.
- Dimensions: 264x174x115 mm.
- Suitable for use on bench, column or wall.
- Rechargeable internal battery (60 hours with 350 Ohm cell).
- CE-M certifiable (OIML R-76 / EN 45501).

Main features

I/O SECTION:

- Configurable RS232/C bidirectional port for connection to printer/labeller, or solidly connected printer.
- Configurable RS232/C (RS485 optional) bidirectional port for connection to PC, PLC, additional remote display or radio modem.

FUNCTIONS:

- Operating modes directly selectable by the user, via dedicated key*:
- High-resolution display x 10
 - Precision weighing with temporary recalibration by sample weight (for internal factory use)
 - Net/gross
 - Conversion lb/kg
 - Free conversion factor (for metre counter, litre counter, etc. systems)
 - Weight totalisation
 - Formulation
 - +/- control with quick target and threshold entry
 - Percentage weighing
 - Dosage in percentage with programmable target
 - Counter
 - Hold
 - Two-speed filling/dosing with zeroing at start (with DFIO optional)

Functions "alibi memory" and "setpoint" are available in combination with the desired operating mode, and are automatically activated at installation of the respective optional board; this way, it is possible to total, save each alibi memory weighing, and activate relay outputs to control automation.

ADDITIONAL FUNCTIONS:

- PEAK, peak weight measurement (code DFWPK)
- Conversion Newton-kg (code DFWPK)
- Input-output (upon request)

Access to user menu via a dedicated key* for setting weighing filter, date and time, setpoint and tare accessible to the user, with programmable login password.

* These quick menu access keys can be inhibited by configuring a dedicated password.




Technical features

Multifunction program	●
Program for weighbridges	-
Program for weighing wheels and vehicle axles	-
Program for dosing	-
RS232/C bidirectional port	● x2
RS485 serial port (replacing 1 x RS232 serial port)	○
Bidirectional serial port over fibre optic	-
USB connection for PC	○
TCP/IP Ethernet	○
Wi-Fi	○
USB flash drive to save weighings	○
Wireless Personal Area Network (WPAN) interface	○
Thermal printer	○
Time and date	○
Printing labels	○
Inputs	○ x2
Outputs	○ x6
Analogue output 4...20 mA, 0...10 Vdc	○
Backlit LCD display	●
Specific display	-
Keypad	Membrane
Case	AISI 304 stainless steel
IP rating	IP68
Board power supply	Battery: 6 V Power: 12 V
Indicator / battery charger power supply	110-240 Vac
Internal battery	●
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e
Converter	24 bit / 3200 Hz
Connectable scales	1
No. analogue load cells	8 x 350 Ω 16 x 700 Ω
OIML R76 / R51 - MID / R134 approvals	●

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- Australian Pattern Approval (NMI)

Technical drawing (mm)

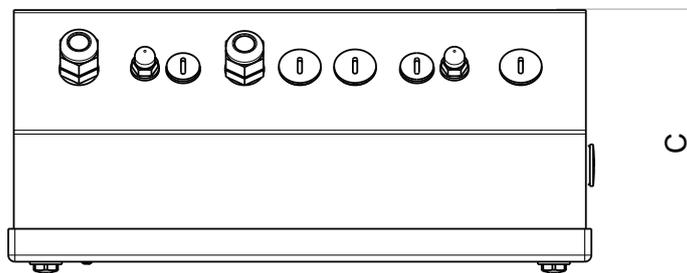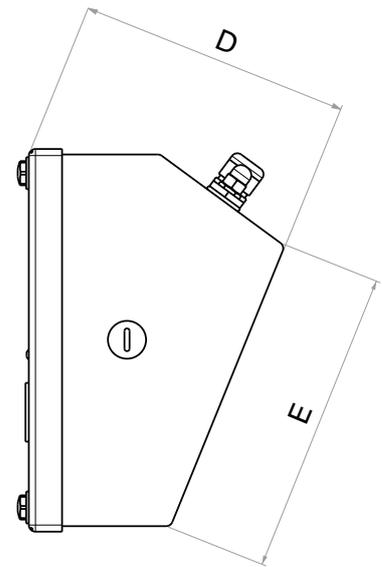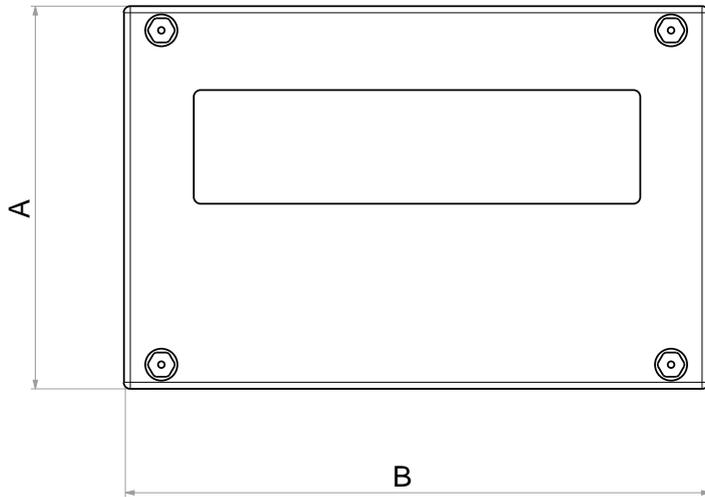

Dimensions			
A	174 mm	D	125 mm
B	264 mm	E	139 mm
C	129 mm		

DFWIECEX2GD

WATERPROOF KEYPAD AND BACKLIT LCD DISPLAY



Weight indicator designed for environments at high risk of explosion with powerful internal processor and multiple interfaces available. DFWIECEX2GD integrates weighing within production processes and to communicate with PLC and other devices.



OIML
APPROVED



IP65



IP68



AISI 304
STAINLESS STEEL



ATEX

Version codes

	DESCRIPTION	CODE	
	Weight indicator, IECEx and ATEX certified, for zones 1, 21, 2, 22. Protection: Ex II 2(2)G(1)G Ex ib [ib Gb] [ia Ga] IIC T4 Gb X for gas and Ex II 2(2)D(1)D Ex tb [ib Db] [ia Da] IIIC T135 °C Db X for dust (Ta=0 °C/+50 °C). Always combine with IECEXPW power supply unit or IECEXB battery. Includes printout of safety instructions and ATEX EU Declaration of Conformity (EN, DE, FR, ES, IT).	DFWIECEX	
	Weight indicator, IECEx and ATEX certified, for zones 1, 21, 2, 22. With integrated, intrinsically safe analogue output and additional cable gland. Protection: Ex II 2(2)G(1)G Ex ib [ib Gb] [ia Ga] IIC T4 Gb X for gas and Ex II 2(2)D(1)D Ex tb [ib Db] [ia Da] IIIC T135 °C Db X for dust (Ta=0 °C/+50 °C). Always combine with IECEXPW power supply unit or IECEXB battery. Includes printout of safety instructions and ATEX EU Declaration of Conformity (EN, DE, FR, ES, IT).	DFWIECEXAN	

Why choose

- LCD display with RGB backlight for clear view of weight.
- AISI 304 stainless steel case with IP68 and IP65 protection rating.
- High speed, latest generation X-Core CPU, ideal for handling fast and accurate weighing, filling or dosing processes.
- Complete offer of industrial interfaces, such as:
 - Intrinsically safe digital I/O.
 - Intrinsically safe analogue output.
 - Up to 3 x RS485 intrinsically safe bidirectional serial ports.
 - Wireless Personal Area Network (WPAN).
- Protection against:
 - Gas: Ex ib [ib Gb] [ia Ga] IIC T4 Gb
 - Dust: Ex tb [ib Db] [ia Da] IIIC T135 °C Db
 - ATEX: II(2)G(1)G
 - ATEX: II(2)D(1)D
 - Ta 0 °C / +50 °C
- IECEx and ATEX certified and approved for legal-for-trade use.

Main features

OPTIONAL DIGITAL INPUTS/OUTPUTS:

- Intrinsically safe 4-input, 4-output digital board with the following specifications:

Inputs

- Ui: 18 V
- Ri: 214
- R input: 859 Ω

Electronic relay outputs

- Ui: 18 V
- Pi: 1.75 W
- In: 70 mA

- Intrinsically safe power supply terminal, for controlling devices in ATEX zone or push-button panel. Output voltage: 6V, max current: 300 mA.

NOTE: by using the available power supply terminal, it is possible to operate the EXPHBN code push-button panel directly, even in a safe area, without protective barriers.

OPTIONAL ANALOGUE OUTPUT:

- Intrinsically safe analogue output, programmable at 0...10 Vdc, 0...20 mA or 4...20 mA.

NOTE: it is possible to transmit the signal directly to the safe area using the intrinsically safe protective barrier, code PFANOUTEX for analogue output in 0...20 mA (or 4...20 mA) configuration.

The DFWIECEXAN analogue output is an active analogue output, therefore it must not be powered. The resistance of the analogue input must be:

- If the output signal is voltage:
Rmin = 1K
- If the output signal is current:
Rmax = 300 ohm

RS485 SERIAL PORT:

- 2 optional intrinsically safe RS485 serial ports for communication with repeaters and other devices.
 - ASCII Protocol
 - Programmable weight string and read command
 - MODBUS RTU

NOTE: it is possible to transmit the data directly to the safe area using the protective barrier, code PFB485EX.


Technical features

Multifunction program	•
Program for weighbridges	-
Program for weighing wheels and vehicle axles	-
Program for dosing	-
RS232/C bidirectional port	-
RS485 serial port (replacing 1 x RS232 serial port)	• x1 ○ x2
Bidirectional serial port over fibre optic	-
USB connection for PC	-
TCP/IP Ethernet	-
Wi-Fi	-
USB flash drive to save weighings	-
Wireless Personal Area Network (WPAN) interface	•
Thermal printer	-
Time and date	○
Printing labels	-
Inputs	○ x4
Outputs	○ x4/12
Analogue output 4...20 mA, 0...10 Vdc	○
Backlit LCD display	•
Specific display	Colour
Keypad	Mechanical
Case	AISI 304 stainless steel
IP rating	IP65 and IP68
Board power supply	5.1 ÷ 9.6 V
Indicator / battery charger power supply	○
Internal battery	External
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e
Converter	-
Connectable scales	1
No. analogue load cells	8, 350 Ω
OIML R76 / R51 - MID / R134 approvals	•

Approvals

- EU Type Examination Certificate (EN 45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- Australian Pattern Approval (NMI)
- ATEX / IECEX
- EN/IEC 60079-0
- EN/IEC 60079-11
- EN/IEC 60079-5
- N/IEC 60079-31
- Certified according to ATEX Directive 2014/34/EU and complying with the IECEx certified equipment scheme, group II category 2GD according to standards EN/IEC 60079-0, EN/IEC 60079-11, EN/IEC 60079-5, EN/IEC 60079-31.

Technical drawing (mm)

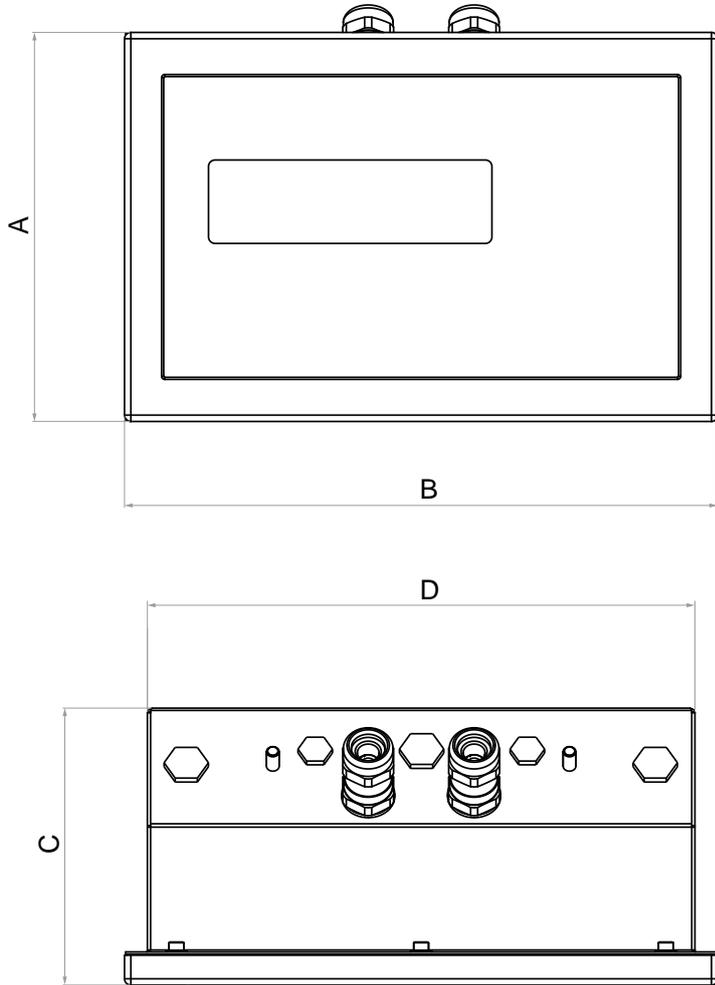

Dimensions			
A	185 mm	D	258.4 mm
B	280 mm	E	143 mm
C	132 mm	F	120 mm

WEIGHT INDICATORS

3590 SERIES

DFW SERIES

INDUSTRIAL PCS

6116 SERIES

WEIGHT REPEATERS

OTHER INSTRUMENTS

WEIGHT TRANSMITTERS

PC SOFTWARE

DFWATEX2GD

WATERPROOF KEYPAD AND BACKLIT LCD DISPLAY

Weight indicator for ATEX zones at risk of explosion, suitable for weighing, dosing and automation systems. One of the key strengths of the DFWATEX2GD indicator is its sturdiness, thanks to its satin-finish stainless steel case with IP65 and IP68 protection rating against dust, gas and water jets.



Version codes

	DESCRIPTION	CODE	
	ATEX 2GD indicator, in IP68 stainless steel. 17-key keypad and LCD display. Protection rating: ATEX II 2(2)G Ex ib [ib Gb] IIC T4 Gb for gas and ATEX II 2(2)D Ex tb [ib Db] IIIC T197°C IP65 Db for dust. Always combine with PW200XRDxxx series power supply unit or DFWBP76ATEX battery. Includes printout of safety instructions and ATEX EU Declaration of Conformity (EN, DE, FR, ES and IT).	DFWATEX2GD-1	
	ATEX 2GD indicator in IP68 stainless steel with standard I/O section. 17-key keypad and LCD display. Protection rating: ATEX II 2(2)G Ex ib [ib Gb] IIC T4 Gb for gas and ATEX II 2(2)D Ex tb [ib Db] IIIC T197°C IP65 Db for dust. Always combine with PW200XRDxxx series power supply unit. Includes printout of safety instructions and ATEX EU Declaration of Conformity (EN, DE, FR, ES and IT).	DFWATEX2GDIO-1	

Why choose

- With a high-contrast, 25-mm digit LCD display to show the weight even in low light conditions.
- The 17-key numeric and functional keypad is waterproof to withstand harsh conditions.
- Suitable for use on walls and benches.
- Power supply via external module: with optional battery pack, or with optional 230 Vac or 24 Vdc power supply unit for connection to mains.
- Up to 8 signal linearisation points with DINITOOLS (3 from keypad)
- Protection: ATEX II 2(2)G Ex ib [ib Gb] IIC T4 Gb for gas, ATEX II 2(2)D Ex tb [ib Db] IIIC T197°C IP65 Db for dust.
- EC Type Examination Certificate according to Annex III (ATEX Directive). CE-M certifiable (OIML R-76 / EN 45501).

Main features

I/O SECTION

(ONLY ON DFWATEX2GDIO VERSION):

- Bidirectional serial port on fibre optic for connection to printer, labeller, PC, or PLC in safe area.
- 4 inputs and 4 outputs (only on DFWATEX2GDIO version combined with PW200XRDxxx and PW200IO options).

SCALE FUNCTIONS:

- Zeroing
- Automatic tare
- Presettable tare
- 10-digit ID.1 and ID.2 code
- Command to print and/or send data
- Selectable function command, power on/off.

SELECTABLE OPERATING MODES:

- High-resolution display x 10
- Net/gross or conversion lb/kg
- Weight totalisation
- Formulation
- +/- control
- Piece-counting (max count res.: 1,500,000 divisions)
- Input/Output
- Hold
- Peer-to-peer (up to 4 connectable remote indicators)
- Setpoint control (only on DFWATEX2GDIO version combined with PW200XRDxxx and PW200IO options).
- MODBUS serial protocol.

Technical features




Multifunction program	•
Program for weighbridges	-
Program for weighing wheels and vehicle axles	-
Program for dosing	-
RS232/C bidirectional port	-
RS485 serial port (replacing 1 x RS232 serial port)	-
Bidirectional serial port over fibre optic	○ x1
USB connection for PC	-
TCP/IP Ethernet	-
Wi-Fi	-
USB flash drive to save weighings	-
Wireless Personal Area Network (WPAN) interface	-
Thermal printer	-
Time and date	-
Printing labels	-
Inputs	4 ****
Outputs	4 ****
Analogue output 4...20 mA, 0...10 Vdc	○
Backlit LCD display	-
Specific display	-
Keypad	Membrane
Case	AISI 304 stainless steel
IP rating	IP65 and IP68
Board power supply	8 ÷ 12 V
Indicator / battery charger power supply	○
Internal battery	○
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e
Converter	○
Connectable scales	1
No. analogue load cells	4 x 350 Ω
OIML R76 / R51 - MID / R134 approvals	•

**** Standard in version DFWATEX2GDF

Approvals

- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- Australian Pattern Approval (NMI)
- ATEX / IECEX

Technical drawing (mm)

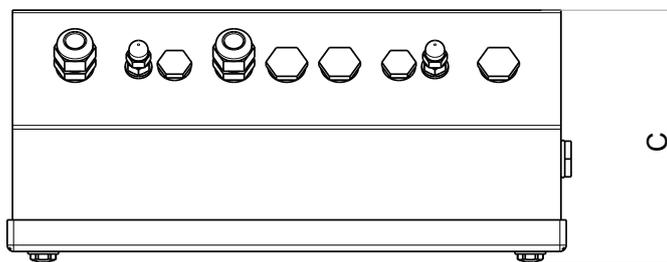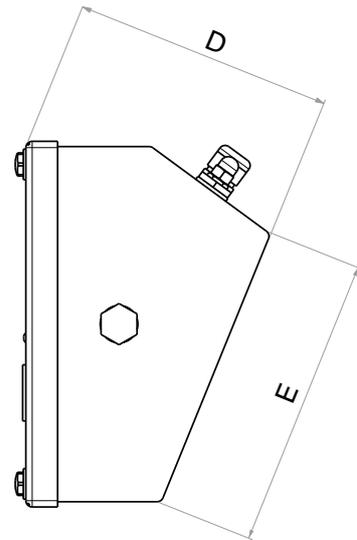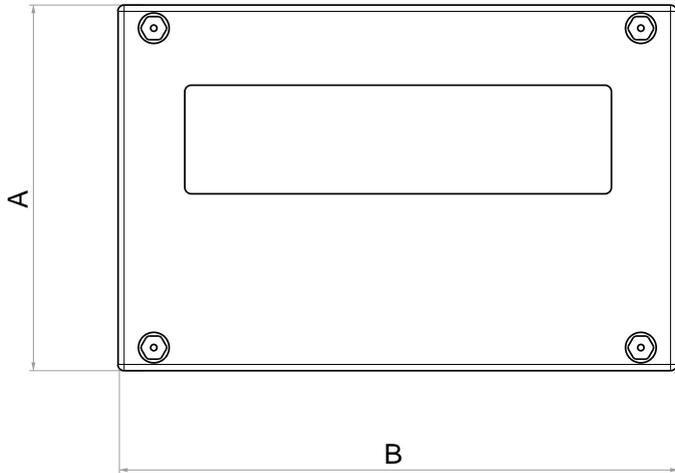

Dimensions			
A	174 mm	D	125 mm
B	264 mm	E	139 mm
C	129 mm		

DFWATEX2GDF

WATERPROOF KEYPAD AND BACKLIT LCD DISPLAY

Weight indicator for ATEX zones at risk of explosion, designed to simplify operation of single-product dosing systems in loading or unloading, automatic or semi-automatic and multi-product dosing and mixing.



OIML
APPROVED



IP65



IP68



STAINLESS
STEEL



ATEX

Version codes

	DESCRIPTION	CODE
	ATEX 2GD indicator for single- and multi-product dosing. Housing in IP68 stainless steel, 17-key keypad and LCD display. Protection rating: ATEX II 2(2)G Ex ib [ib Gb] IIC T4 Gb for gas and ATEX II 2(2)D Ex tb [ib Db] IIIC T197°C IP65 Db for dust. Always combine with PW200XRDxxx series power supply unit and option PW200IO. Includes printout of safety instructions and ATEX EU Declaration of Conformity (EN, DE, FR, ES and IT).	DFWATEX2GDF

Why choose

- With a high-contrast, 25-mm digit LCD display to show the weight even in low light conditions.
- The 17-key numeric and functional keypad is waterproof to withstand harsh conditions.
- Made with stainless steel case with IP65 and IP68 protection rating for protection against dust, gas and high-pressure water jets.
- Suitable for use on walls and benches.
- Printout of dosing and consumption data, in safe zone via fibre optic.
- Backup memory for storing dosing data in case of accidental poweroff.
- Power supply via external PW200XRD power supply unit, with option PW200IO.
- EC Type Examination Certificate according to Annex III (ATEX Directive). CE-M certifiable (OIML R-76 / EN 45501).

Main features

I/O SECTION:

- Bidirectional serial port on fibre optic for connection to printer, labeller, PC, or PLC in safe area.
- 4 barriered digital logic outputs, configurable according to the selected dosing function, which can be connected to other intrinsically safe devices in hazardous area.
- 4 inputs with functions dependent on the selected dosing function.

DOSING CONFIGURATIONS:

Available dosing functions:

- Single-product loading dosage enables a single-product loading dosage system, useful for filling silos, hoppers or big bags, or guiding the operator in manual dosing.
- Single-product unloading dosage enables a single-product unloading dosage system. Useful for dividing the material into equal weight quantities, or taking precise quantities from silos, with refill management.
- Multi-product dosing enables dosing multiple products, in loading or unloading, mixing and formulation, with the possibility of managing mixers, burners or vibrators via dedicated contacts.




Technical features

Multifunction program	-
Program for weighbridges	-
Program for weighing wheels and vehicle axles	-
Program for dosing	•
RS232/C bidirectional port	-
RS485 serial port (replacing 1 x RS232 serial port)	-
Bidirectional serial port over fibre optic	• x1
USB connection for PC	-
TCP/IP Ethernet	-
Wi-Fi	-
USB flash drive to save weighings	-
Wireless Personal Area Network (WPAN) interface	-
Thermal printer	-
Time and date	-
Printing labels	-
Inputs	4
Outputs	4
Analogue output 4...20 mA, 0...10 Vdc	-
Backlit LCD display	-
Specific display	-
Keypad	Membrane
Case	AISI 304 stainless steel
IP rating	IP65 and IP68
Board power supply	8 ÷ 12 V
Indicator / battery charger power supply	○
Internal battery	-
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e
Converter	•
Connectable scales	1
No. analogue load cells	4 x 350 Ω
OIML R76 / R51 - MID / R134 approvals	•

Approvals

- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- Australian Pattern Approval (NMI)
- ATEX / IECEx

Technical drawing (mm)

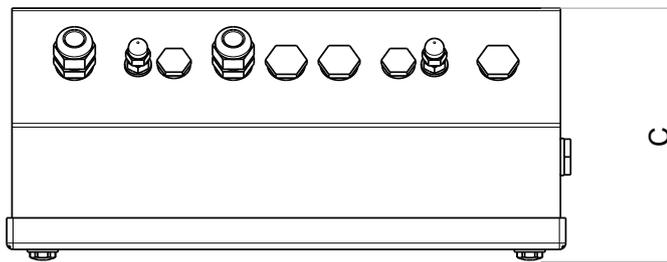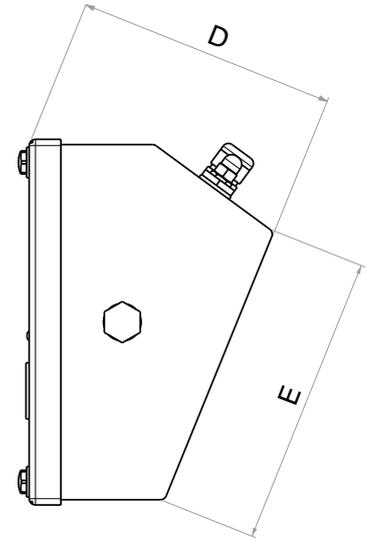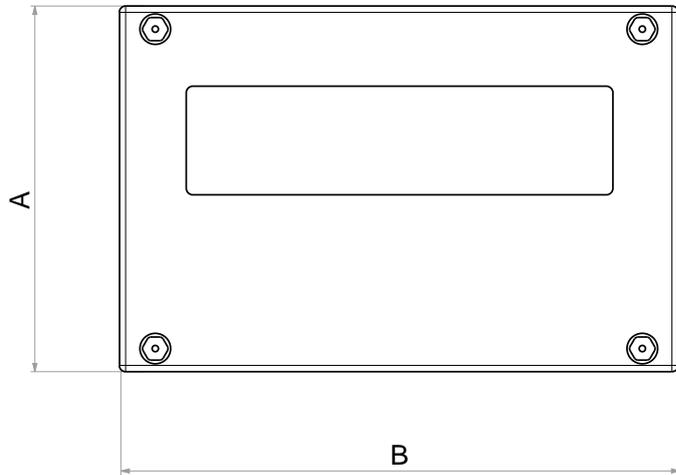

Dimensions			
A	174 mm	D	125 mm
B	264 mm	E	139 mm
C	129 mm		

DFWIECEX3GD

WATERPROOF KEYPAD AND BACKLIT LCD DISPLAY

The DFWIECEX3GD weight indicator for ATEX zones at risk of explosion is ideal for weighing, dosing and automation systems. Features a new satin-finish stainless steel case with IP68 protection rating, without front screws that makes it easier to clean and makes it resistant to dust and gas.



Version codes

	DESCRIPTION	CODE	
	Ex indicator for zone 2/22. Case in stainless steel, IP68 rating, 17-key keypad, backlit LCD display, and internal power supply unit. Marking: ATEX/IECEX II 3G Ex nR IIC T6 Gc X (0 °C<= Ta <=50 °C) for gas, and II 3D Ex tc IIIC T85°C Dc IP65 X (0 °C<= Ta <=50 °C) for dust. Includes printout of safety instructions and ATEX EU Declaration of Conformity (EN, DE, FR, ES and IT).	DFW-IECEX3GD	
	Ex indicator for zone 2/22 that can be directly connected to load cells installed in zone 1/21 and 0/20. Case in stainless steel, IP68 rating, 17-key keypad, backlit LCD display, and internal power supply unit. Marking: ATEX/IECEX II 3G Ex nR [ia] IIC T6 Gc X (0 °C<= Ta <=50 °C) for gas, and II 3D Ex tc [ia] IIIC T85°C Dc IP65 X (0 °C<= Ta <=50 °C) for dust. Includes printout of safety instructions and ATEX EU Declaration of Conformity (EN, DE, FR, ES and IT).	DFW-IECEX3GDZB	

Why choose

- Thick, waterproof 17-key keypad.
- 6-digit, 25-mm LCD display with standard backlight.
- MASTER/REPEATER optional, specifically for using the indicator as universal repeater, or multi-scale in combination with DFW/DGT/MCW.
- Ideal for use on bench use.
- 4 channels (for single weighing system).
- Digital calibration and Set-Up from keypad.
- Up to 3,000,000-point internal resolution.

Main features

I/O SECTION:

- Configurable RS232/C bidirectional port for connection to printer/labeller, in safe zone.
- Configurable RS232/C bidirectional port for connection to PC, PLC, additional remote display, in safe zone.

KEYPAD FUNCTIONS:

- Zero
- Automatic tare
- Presetable tare
- 10-digit ID.1 and ID.2 code
- Command to print and/or send data
- Selectable function command, power on/off.

SELECTABLE FUNCTIONS:

- High-resolution display x 10
- Net/gross or conversion lb/kg
- Weight totalisation
- Formulation
- +/- control
- Percentage weighing
- Approved weight transmission to PC/PLC (with ALMEM Alibi memory option)
- Counter
- Input/Output
- Hold
- Setpoint control (with DFIO option).



Technical features

Multifunction program	●
Program for weighbridges	-
Program for weighing wheels and vehicle axles	-
Program for dosing	-
RS232/C bidirectional port	● x2
RS485 serial port (replacing 1 x RS232 serial port)	○
Bidirectional serial port over fibre optic	-
USB connection for PC	-
TCP/IP Ethernet	○
Wi-Fi	-
USB flash drive to save weighings	-
Wireless Personal Area Network (WPAN) interface	-
Thermal printer	○
Time and date	○
Printing labels	○
Inputs	○ x2
Outputs	○ x6
Analogue output 4...20 mA, 0...10 Vdc	-
Backlit LCD display	●
Specific display	-
Keypad	Mechanical
Case	AISI 304 stainless steel
IP rating	IP68
Board power supply	5 ÷ 12 V
Indicator / battery charger power supply	110-240 Vac 12-24 Vdc
Internal battery	-
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e
Converter	-
Connectable scales	1
No. analogue load cells	8 x 350 Ω
OIML R76 / R51 - MID / R134 approvals	●

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- Australian Pattern Approval (NMI)
- ATEX / IECEx
- EN/IEC 60079-0
- EN/IEC 60079-11 (version ZB)
- EN/IEC 60079-15
- EN/IEC 60079-31
- Australian legal for trade certificate of approval (NMI S788)
- Certified according to ATEX Directive 2014/34/EU and complying with the IECEx scheme, group II category 3GD according to standards EN/IEC 60079-0, EN/IEC 60079-11, EN/IEC 60079-15, EN/IEC 60079-31.

Technical drawing (mm)

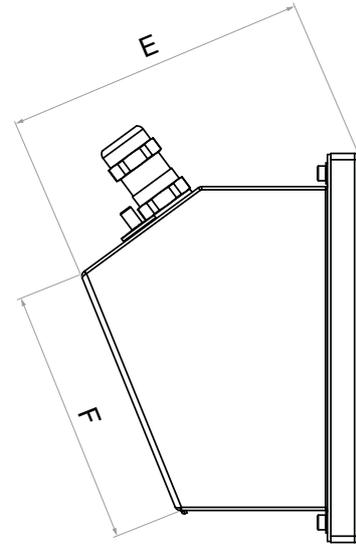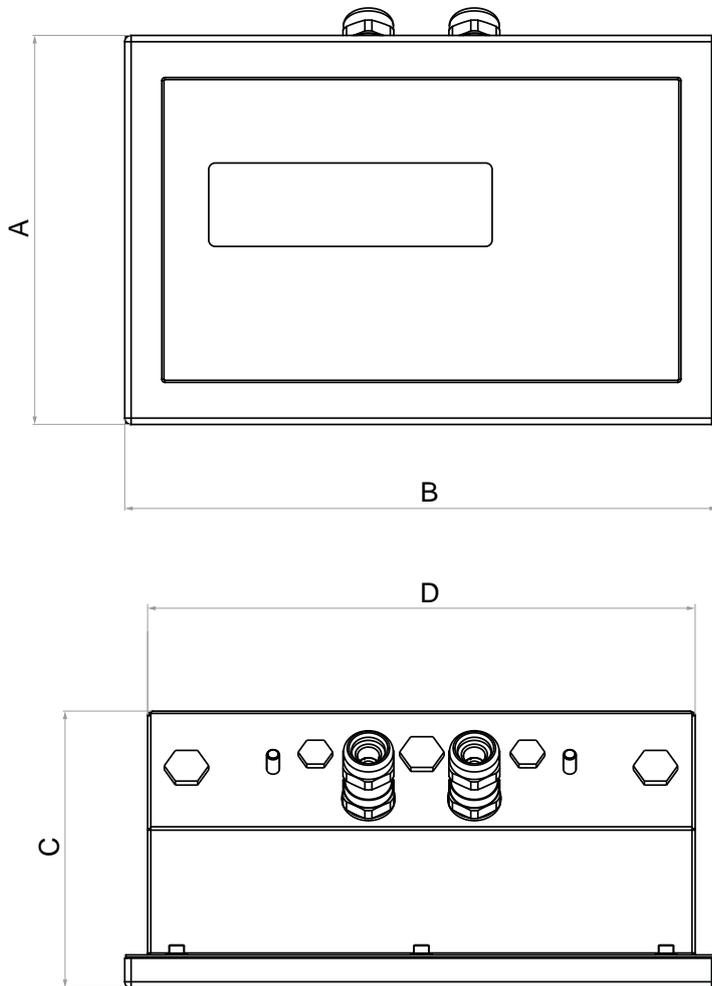

Dimensions			
A	185 mm	D	258.4 mm
B	280 mm	E	143 mm
C	132 mm	F	120 mm

DFWATEX3GD

WATERPROOF KEYPAD AND BACKLIT LCD DISPLAY

Weight indicator for ATEX zones at risk of explosion, suitable for weighing, dosing and automation systems. The IP68 satin-finish stainless steel case ensures sturdiness and protection against dust, gas and high-temperature water jets.



OIML
APPROVED



IP68



STAINLESS
STEEL



ATEX

Version codes

	DESCRIPTION	CODE	
	ATEX 3GD indicator in IP68 stainless steel with internal power supply unit. 17-key keypad, backlit LCD and standard weighing program. Protection: ATEX II 3G Ex nR IIC T6 Gc X for gas and ATEX II 3D Ex tc IIIC T85°C Dc IP68 X for dust. Includes manual and ATEX EU Declaration of Conformity, available in EN, DE, FR, IT.	DFWATEX3GD-1	
	ATEX 3GD indicator to be always combined with BP6ESTATEX3GD, BP6CB and BTCB3GD options. In IP68 stainless steel, with 17-key keypad, backlit LCD and standard weighing program. Protection: ATEX II 3G Ex nR IIC T6 Gc X for gas and ATEX II 3D Ex tc IIIC T85°C Dc IP68 X for dust. Includes manual and ATEX EU Declaration of Conformity, available in EN, DE, FR, IT.	DFWATEX3GDB-1	

Why choose

- With a high-contrast, 6-digit, 25-mm backlit LCD display to clearly show the weight even in low light and low temperature conditions.
- The 17-key numeric and functional keypad is waterproof.
- Suitable for use on bench, column or wall.
- Up to 8 signal linearisation points with DINITOOLS (3 from keypad).
- Protection rating:
 - ATEX II 3G Ex nR IIC T6 Gc X for gas
 - ATEX II 3D Ex tc IIIC T85°C Dc IP68 X for dust.
- CE-M certifiable (OIML R-76 / EN 45501).

Main features

I/O SECTION

(ONLY ON DFWATEX2GDIO VERSION):

- Configurable RS232/C bidirectional port for connection to printer/labeller, in safe zone.
- Configurable RS232/C bidirectional port for connection to PC, PLC, additional remote display, in safe zone.

KEYPAD FUNCTIONS:

- Zero
- Automatic tare
- Presetable tare
- Print and/or send data
- Selected function command
- Power on/off
- 20-tare archive
- 2 numeric IDs
- Keypad lock
- Repeat last print carried out

SELECTABLE FUNCTIONS:

- High-resolution display x 10
- Net/gross or conversion lb/kg
- Weight totalisation
- Formulation
- +/- control
- Percentage weighing
- Approved weight transmission to PC/PLC (with ALMEM Alibi memory option)
- Counter;
- Input/Output
- Hold
- Setpoint control (with DFIO option)




Technical features

Multifunction program	•
Program for weighbridges	-
Program for weighing wheels and vehicle axles	-
Program for dosing	-
RS232/C bidirectional port	• x2
RS485 serial port (replacing 1 x RS232 serial port)	○
Bidirectional serial port over fibre optic	-
USB connection for PC	-
TCP/IP Ethernet	○
Wi-Fi	○
USB flash drive to save weighings	-
Wireless Personal Area Network (WPAN) interface	-
Thermal printer	○
Time and date	○
Printing labels	○
Inputs	○ x2
Outputs	○ x6
Analogue output 4...20 mA, 0...10 Vdc	○
Backlit LCD display	•
Specific display	-
Keypad	Membrane
Case	AISI 304 stainless steel
IP rating	IP68
Board power supply	Battery: 6 V Power: 12 V
Indicator / battery charger power supply	110-240Vac or battery
Internal battery	○
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e
Converter	-
Connectable scales	1
No. analogue load cells	8 x 350 Ω
OIML R76 / R51 - MID / R134 approvals	•

Approvals

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- Australian Pattern Approval (NMI)
- ATEX / IECEx

Technical drawing (mm)

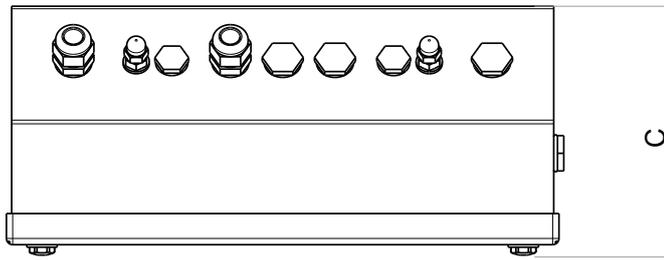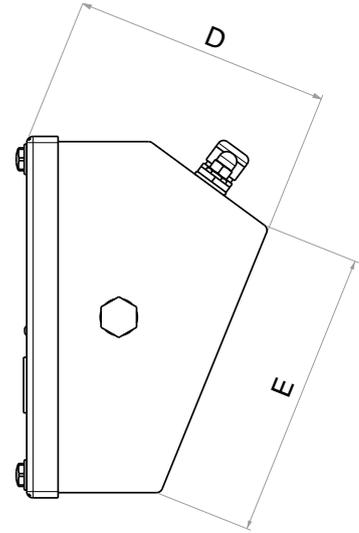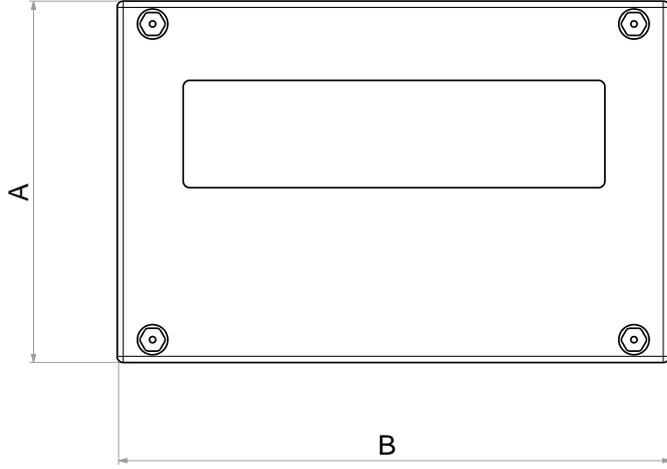

Dimensions			
A	174 mm	D	125 mm
B	264 mm	E	139 mm
C	129 mm		

WEIGHT INDICATORS

3590 SERIES

DFW SERIES

INDUSTRIAL PCS

6116 SERIES

WEIGHT REPEATERS

WEIGHT REPEATERS

OTHER INSTRUMENTS

WEIGHT TRANSMITTERS

PC SOFTWARE

DFWIECEX-BATCH1

WATERPROOF KEYPAD AND BACKLIT LCD DISPLAY

The DFWIECEX-BATCH1 weight indicator is ideal for single-product dosing systems in hazardous areas, thanks to the AISI 304 stainless steel case with IP65 and IP68 rating. With the new functions, it is also possible to manage 3 fill speeds (slow, medium, fast), in addition to raising the lance. Provides up to 50 memories to save preset dosing targets for quick recall.



Version codes

	DESCRIPTION	CODE	
	Weight indicator, IECEx and ATEX certified, for zones 1, 21, 2, 22, for single-product loading dosage. With intrinsically safe, integrated RS485 serial port and 4 digital inputs and 12 digital outputs. Protection: Ex II 2(2)G(1)G Ex ib [ib Gb] [ia Ga] IIC T4 Gb X for gas and Ex II 2(2)D(1)D Ex tb [ib Db] [ia Da] IIIC T135°C Db X for dust (Ta=0 °C/+50 °C). Always combine with IECXPW power supply unit or IECAXB battery. Includes printed safety instructions and ATEX Declaration of Conformity (EN, DE, FR, ES, IT).	DFWIECEX-BATCH1	

Why choose

- With an LCD display with RGB backlight that is easy to read even in low light conditions.
- State-of-the-art, high-speed X-Core CPU, ideal for handling fast and accurate weighing, filling or dosing processes.
- Flight weight management and control of tolerance, safety tare and programmable lance.
- 4 digital inputs for remote START, STOP and PAUSE.
- Protection against:
 - Gas: Ex ib [ib Gb] [ia Ga] IIC T4 Gb
 - Dust: Ex tb [ib Db] [ia Da] IIIC T135 °C Db
 - ATEX: II2(2)G(1)G
 - ATEX: II2(2)D(1)D
 - Ta 0°C / +50°C

Main features

COMMUNICATION INTERFACES:

- DIGITAL INPUTS/OUTPUTS:
Intrinsically safe 4-input and 12-output digital board with the following specifications:

Inputs

- Ui: 18 V
- Ri: 214 Ω
- R input: 859 Ω

Electronic relay outputs

- Ui: 18 V
- Pi: 1.75 W
- In: 70 mA

- Intrinsically safe power supply terminal, for control devices in ATEX zone or push-button panels. Output voltage: 6V, maximum current: 300 mA.

NOTE: By using the available power supply terminal, it is possible to operate the EXPHBN code push-button panel directly, even in a safe area, without protective barriers.

OPTIONAL ANALOGUE OUTPUT:

- Intrinsically safe analogue output, programmable at 0...10 Vdc, 0...20 mA or 4...20 mA.

NOTE: It is possible to transmit the signal directly to the safe area using the intrinsically safe protective barrier, code PFANOUTEX for analogue output in 0...20 mA (or 4...20 mA) configuration.

- The DFWIECEXAN analogue output is an active analogue output, therefore it must not be powered.
- The resistance of the analogue input must be:
 - If the output signal is voltage: Rmin = 1K
 - If the output signal is current: Rmax = 300 ohm

RS485 SERIAL PORT:

- 2 optional intrinsically safe RS485 serial ports for communication with repeaters and other devices.
- ASCII Protocol
- Programmable weight string and read command

NOTE: It is possible to transmit the data directly to the safe area using the protective barrier, code PFB485EX.


Technical features

Multifunction program	-
Program for weighbridges	-
Program for weighing wheels and vehicle axles	-
Program for dosing	●
RS232/C bidirectional port	-
RS485 serial port (replacing 1 x RS232 serial port)	● x1 ○ x2
Bidirectional serial port over fibre optic	-
USB connection for PC	-
TCP/IP Ethernet	-
Wi-Fi	-
USB flash drive to save weighings	-
Wireless Personal Area Network (WPAN) interface	○
Thermal printer	-
Time and date	○
Printing labels	-
Inputs	4
Outputs	12
Analogue output 4...20 mA, 0...10 Vdc	○
Backlit LCD display	●
Specific display	Colour
Keypad	Mechanical
Case	AISI 304 stainless steel
IP rating	IP65 and IP68
Board power supply	5.1 ÷ 9.6 V
Indicator / battery charger power supply	○
Internal battery	○
Adjustable tilt bracket	○
OIML features	3.000e, 2x3.000e, 3x3.000e, 6.000e, 6.000+6.000e, 10.000e
Converter	-
Connectable scales	1
No. analogue load cells	8 x 350 Ω
OIML R76 / R51 - MID / R134 approvals	●

Approvals

- EC Type Examination Certificate (EN 45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R61 - MID
- Australian Pattern Approval (NMI)
- ATEX / IECEX
- EN/IEC 60079-0
- EN/IEC 60079-11
- EN/IEC 60079-5
- EN/IEC 60079-31
- Certified according to ATEX Directive 2014/34/EU and complying with the IECEx certified equipment scheme, group II category 2GD according to standards EN/IEC 60079-0, EN/IEC 60079-11, EN/IEC 60079-5, EN/IEC 60079-31.s. IECEx and ATEX certified and approved for Legal for Trade use.

Technical drawing (mm)

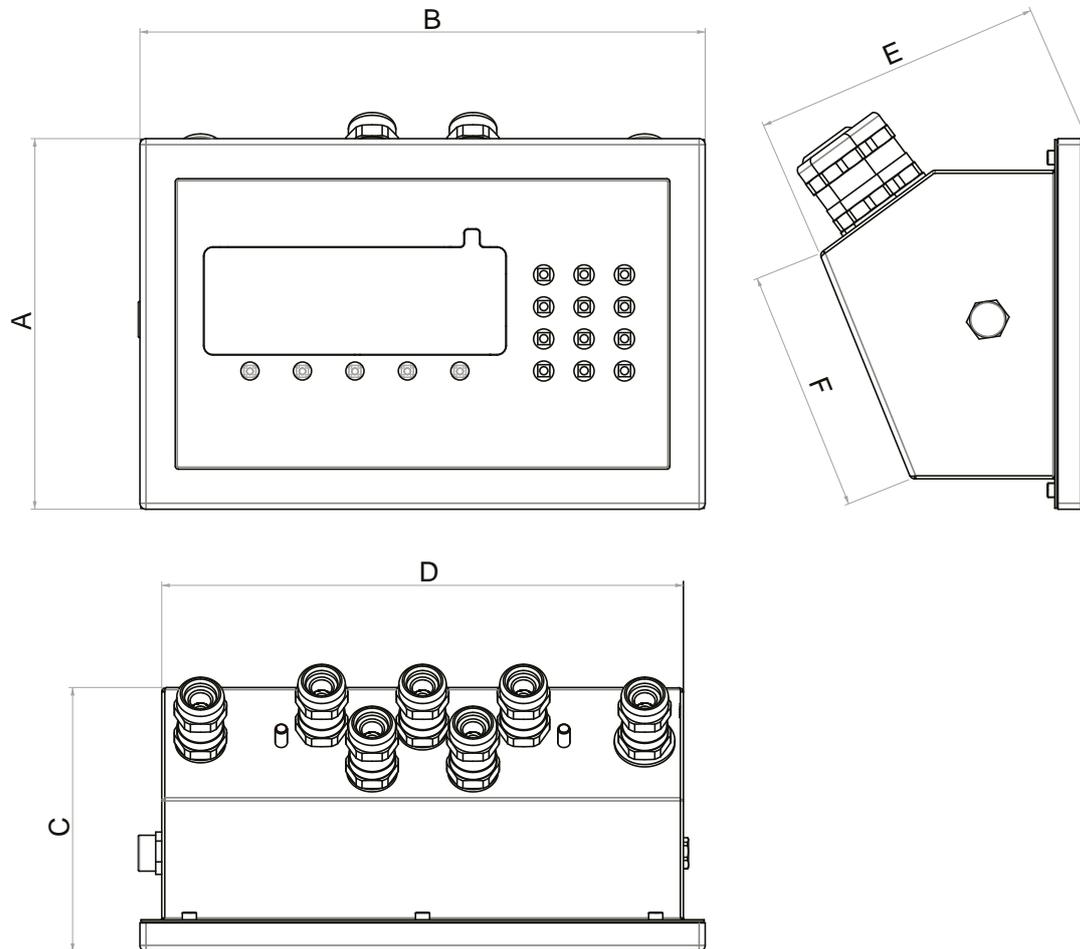

Dimensions			
A	185 mm	D	258.4 mm
B	280 mm	E	144 mm
C	132 mm	F	121 mm

LIST OF MAIN
OPTIONS AND ACCESSORIES
DFW SERIES

Main options and accessories

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFWIECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code	
	Alibi memory and Calendar Clock for DFWIECEX indicator.															•						ALM-IECEX	
	Version with AU battery charger.						•	•														AUS-V4	
	Connection cable for DFWBP76ATEXD battery.																•					BTCB2GD	
	Connection cable for BP6ESTATEX3GD battery.																		•			BTCB3GD	
	Program for peak weight measurement or conversion kg/N.					•	•		•	•	•					•						DFWPK	
	Intrinsically safe analogue output board, 4..20 mA, 0..10 Vdc.				•																	IECEXANOUT	
	Bracket for installing panel indicator.				•											•						PANEL-ST	
	24 Vdc power supply unit for PFANOUTEX protection barrier.				•											•						PFANOUTEXPW	
	Version with AU power cable.												•			•						PWCORDAUSVDE	
	Version with BS1363 power cable (UK plug).												•			•						PWCORDUKVDE	
	RS232/C cable l=1.5 m for connection to PC.												•									RSCBP2P	
	Version with UK battery charger.						•	•														UK-V4	
	Version with US battery charger.						•	•														US-V4	
	IECEX and ATEX power supply unit for DFWIECEX with 110-230 Vac input. Includes input cable for connection to main (6 m) and output cable for connection to indicator (3 m).				•											•						IECEXPW	
	IECEX and ATEX power supply unit for DFWIECEX with 24 V (AC or DC) input. Includes input cable for connection to main (6 m) and output cable for connection to indicator (3 m).				•											•						IECEXPW24	

Main options and accessories

Image	Description	DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code	Certification	
	Armoured cable 4x1 mm ² (suitable for Ex zones). Inner sheath in PVC compound.																•	•					EXACBPW	
	Type-approved software for recording weighing results to a PC (virtual alibi function) with an integrated API library for interfacing with other software.	•	•	•												•							D-LEGAL	
	Version with US type-B power cable (Japan, North and Central America).												•										PWCORDUSVDE	
	Kit of 10 metal expanders PG9 to PG11, IP68 (max. cable ø 12 mm).					•	•	•	•	•	•		•	•									• PG9PG11C	
	Kit of 10 metal expanders PG9 to PG13, IP68 (max. cable ø 12 mm).					•	•	•	•	•	•		•	•									• PG9PG13C	
	IECEXB battery charging kit (safe zone charging). Consisting of certified battery charger mod. IECEXCB and power supply unit with 230 Vac plug (VDE cable).															•							IECEXCBAL	
I/O	Board with 4 opto-isolated digital inputs and 4 outputs, intrinsically safe, for controlling devices in zones at risk of explosion.															•							IECEX4IN4OUT	
	Intrinsically safe RS485 serial port, for communication in ATEX zone. Maximum communication distance 200 m.				•											•							485IECEX	
	Cable with connector for connection of IECEXB battery to DFWIECEX indicator. Length: 1.2 m.															•							BTCBIECEX	
	PC software for vehicle weighing. May be combined with DFW, DGT and 3590 series weight indicators.							•	•	•			•	•		•		•	•				WEITRUCK-1	
	Installation of the ZBA1S / PFB485EX Zener barrier inside the indicator case.				•											•				•			ZBINST	
	RS485 alphanumeric repeater with multicolour 110-mm LED display. Complete with 10-m RS485 cable with IP67 connector.										•												GLR100	

Main options and accessories

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWX HYGIENX®	Code	
	3/2-way poppet valve, with Piezopilot valve, stacked, normally closed (NC). Compatible with DFWIECEX digital outputs. Complies with ATEX Directive and IECEx certified equipment scheme.				•											•						PPVIECEX	
	3/2-way poppet valve, with Piezopilot valve, stacked, normally closed (NC). Compatible with DFWIECEX digital outputs. Complies with ATEX Directive.				•											•						PPVEX	
	ATEX 3GD weight repeater with 60-mm LED display. Housing in IP68 stainless steel, 5-key keypad.																			•		DGT60R3GD2	
	PG9 cable gland for DFW and 3590 series IECEx Cable diameter: from 4 to 7 mm, or from 7 to 10 mm.				•											•		•				PG9-IECEX	
	PG7 cable gland for DFW and 3590 series IECEx Cable diameter: from 4 to 7 mm.				•											•		•				PG7-IECEX	
	PG13 cable gland for DFW and 3590 series IECEx Cable diameter: from 5.5 to 8 mm, from 8 to 10.5 mm, or from 10.5 to 13 mm.				•											•		•				PG13-IECEX	
	Software for recording weighing results to a PC (for internal use) with an integrated API library for interfacing with other software.				•											•						D-API	
	Armoured cable 6x0.25 mm ² (suitable for Ex zones). Internal sheath in PVC, diameter 5 mm.				•											•	•	•				LCCBA	
	Protective barrier for analogue output in current, in configuration 0..20 mA or 4..20 mA, for direct connection in safe area. Max cable length: 200 m.				•											•						PFANOUTEX	
	ETHCBEX cable with cable gland and connectors. Length: 10 m.																		•	•		ETHCBEX10M	
	RS485 connection cable for series Fieldbus to CPU. Length: 20 cm.															•						191750	
	5-key indicator, with external power supply unit. NOT INCLUDED: internal battery, RJ45 port, cable glands and plugs. No factory-installed options.									•												DFW1	

3590 SERIES

WEIGHT INDICATORS

DFW SERIES

6116 SERIES

INDUSTRIAL PCS

WEIGHT REPEATERS

OTHER INSTRUMENTS

WEIGHT TRANSMITTERS

PC SOFTWARE

Main options and accessories

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code	
WEIGHT INDICATORS					•									•	•	•	•	•		•		PFB485EX	
																		•	•			CNFOPT	
DFW SERIES																•						IECEXBP	
					•											•						tdb	
INDUSTRIAL PCS					•											•						EXDC	
6116 SERIES																							
WEIGHT REPEATERS						•	•		•	•	•				•	•					•	ZBA1S	
OTHER INSTRUMENTS																						DGT1SAN	
WEIGHT TRANSMITTERS																							
PC SOFTWARE																							

Junction boxes / Junction boards - Cell cables

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code	
	Internal board for quick connection of multiple channels (equalised).									•	•	•		•	•							• DFW4CH	
	LCCBC cable + 10-m extension.	•		•		•	•		•	•	•			•	•							LCCB10C	
	LCCBC cable + 5-m extension.	•		•		•	•		•	•	•			•	•							LCCB5C	
	Shielded cable 6x0.25 mm ² (suitable for Ex zones). Inner sheath in PVC. Shielding with tinned copper braid. External sheath in PVC, diameter 5.8 mm.				•											•	•	•				LCCB	
	Cable for connection of platform to indicator, l=50 cm. Female connector, solder type.	•		•		•	•		•	•	•			•	•							LCCBC	
	Stainless steel equalised junction box with up to 4 load cells. IP68/IP69K protection rating, with 4 + 1 cable gland.																					• JB4QIP69K	

Saving weights

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code	
	Set of 5 x USB flash drives for storing weights.									•	•	•	•	•	•							USBK	
	Internal interface for saving data on USB flash drive. USB flash drive supplied as standard.									•	•	•		•	•							USBC-1	
	Panel interface for saving data on USB flash drive. With USB flash drive for PC.												•									USBCKR-1	
	Integrated USB port for saving data on USB flash drive. Combine with DFWLI and DFWLKI weight indicators. USB flash drive supplied as standard.								•													USBDFWL-1	
	“WeiMonitor” PC software for monitoring/recording weights made on connected scale, in real time (the price shown alongside refers to the licence for managing one scale).	•				•	•		•	•	•	•	•	•	•		•		•	•	•	SWM	

Approval

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code		
	Approved for Australia, for individual platform/scale.				•	•	•		•	•	•			•	•	•	•		•	•	•	•	ECEM-AU	
	Welmec plates and module for a scale. NET PRICE. Service available in combination with Dini Argeo indicator.	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	KCEM	

Printers/Labellers

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code		
	Customised printouts for DFW and DFWL series. NET price.	•		•		•			•	•	•	•	•	•	•								CNFSERV	
	Service loading one custom code-page, for TPR printer. Standard code-page: PC437 (USA, Central Europe).	•		•		•			•	•	•	•	•	•	•					•	•		CODEPG	
	Thermal transfer or direct thermal labeller. With peel-off mechanism as standard. Maximum print dimensions: 25400 x 108 mm.	•		•		•			•	•	•			•	•						•		LP542TE	
	Solidly connected thermal printer in IP65 stainless steel.													•	•								TPRXT	
	Desktop thermal printer. For weight indicator, with container in IP40 ABS, 1.5-m connection cable and internal power supply unit. Thermal paper roll included as standard.					•			•												•	•	OBTPRB	
	Direct thermal or transfer labeller. Optional peel-off. Maximum print dimensions: 25400 x 108 mm.	•		•		•			•	•	•			•	•								SMTPLUS-2	
	Peel-off and rewind kit for SMTPLUS-1 labeller.													•									SMTRPK-1	
	Thermal printer with paper cutter. Paper roll not included.	•		•																			PR80-3	

Printers/Labellers

📷	Description	DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code	
	Cable with AMP RS232 connector l = 1.5 m, for LP542xx, SMTPLUS printers.	•		•																		RSCBLPA	
	Cable with AMP RS232 connector l = 10 m, for LP542xx, SMTPLUS printers.	•		•																		RSCBLPA10M	
	1,5 m cable for connecting PR80-3 printer.	•		•																		RSCBSHTP	
	10 m cable for connection to the PR80-3 printer.	•		•																		RSCBSHTP10M	

Communication interfaces

📷	Description	DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code		
	RS485 bidirectional ports for DFW series.									•	•	•	•	•						•		DF485	🔒	
	ATEX RS485 port, for DFWATEX2GDF and DFWATEX2GDIO.																	•	•			DF485EX	🔒	
	Internal RS485 interface (assembly and cable gland not included).						•		•											•	•	RS485C	🔒	
	Alibi memory (fiscal memory, max. 120,000 weighings) for approved weight transmission to PC/PLC or storage on MMC/USB.					•	•		•	•	•			•	•					•	•	•	ALMEM-1	🔒
	Alibi memory for ATEX 2GD indicator (fiscal memory, max. 120,000 weighings) for approved weight transmission to PC/PLC.																•					ALMEMATEX	🔒	
	Internal opto-isolated analogue output, 0-4/20 mA, 0-10 Vdc. (cable gland not included). For DFW, 3590 and CPW series indicators. Output -10/+10 Vdc upon request, only in order phase.									•	•		•	•	•					•		DAC16O-2	🔒	
	Opto-isolated analog output, 0-4/20 mA, 0-10Vdc. Assembly included. *Carrier board (CBD) required.	•		•																		FO-ANOUT		
	Internal 2 IN / 6 OUT interface (requires FW 05.05.00 or higher).								•	•	•			•	•							DFIO-1	🔒	
	External 2.4 GHz radio module for PC, with USB cable l=1 m. Power supply direct from USB port. Maximum operating distance in suitable environmental and installation conditions: 45 m indoor, 140 outdoor. 39 configurable channels.									•	•	•	•	•	•							OBRF2G4-USB		

Communication interfaces

Image	Description	DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLJ	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFWIECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code	
	Built-in 2.4 GHz radiofrequency module with IP69K protection rating assembly included. Maximum operating distance up to 60 m INDOOR, and up to 80 m OUTDOOR Max. Up to 38 configurable channels. (RF2G4X69K must be combined with another radio module). NOTE: Requires carrier board (FO-CBD).	•	•	•																		FO-RF2G4	
	2.4 GHz radio-frequency module with TTL port. Maximum operating distance in suitable environmental and installation conditions: 45 m indoor, 140 m outdoor.					•																RF2G4-TTL	
	Internal 2.4 GHz radio module. Maximum operating distance in suitable environmental and installation conditions: 45 m indoor, 140 m outdoor. Max. 39 configurable channels. (RF2G4 must be in combination with another radio module).								•													RF2G4	
	Board for internal installation with 2 inputs and 6 opto-isolated digital outputs, mounting included.	•		•																		FO-DFIO	
	Ethernet TCP/IP port - Modbus TCP, mounting included.			•																		FO-ETH	
	Ethernet TCP/IP port - Modbus TCP, mounting included. This option does not include the cable gland for the Ethernet cable. *Hygienic cable gland supplied as standard with cable code ETH5MC-HGX.			•																			
	WiFi communication port with IP68/IP69K antenna, mounting included.	•	•	•																		FO-WIFI	
	Alibi Memory board, assembly included.	•	•	•																		FO-ALMEM	
	Board for integrated installation of optional 2.4 GHz radio or Wireless Personal Area Network (WPAN) modules.		•	•																		FO-CBD	
	Internal 2.4 GHz radio module with IP69K rating. Maximum operating distance in suitable environmental and installation conditions: 45 m indoor, 140 m outdoor.																					• RF2G469K	
	2.4 GHz radio-frequency module for ATEX zones 2 & 22. Protection case in IP66 ABS, armoured 3-m cable and power supply from indicator.																					• OBRF2G4-3GD	

Communication interfaces

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFWIECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code		
	External 2.4 GHz radio module, with cable l=3 m. Case in IP65 ABS, powered from indicator. Maximum distance in suitable environmental and installation conditions: 45 m indoor, 140 m outdoor. 39 configurable channels.								•	•	•			•	•							•	OBRF2G4	
	External module for 2.4GHz radio frequency communication. Equipped with 3 m cable. Designed for IP66 rating. Maximum operating distance up to 60 m INDOOR, and up to 80 m OUTDOOR. To be connected to an RS232 port. Includes PG9 cable gland for indicator.	•		•																			OBRF2G4X	
	External module for 2.4GHz radio frequency communication, with USB type A port, for PC. Equipped with 1 m cable. Designed for IP66 rating. Maximum operating distance up to 60 m INDOOR, and up to 80 m OUTDOOR.	•		•																			OBRF2G4X-USB	
	External module for Wireless Personal Area Network (WPAN) communication. Equipped with 3 m cable. Designed for IP66 rating. Maximum operating distance up to 30 m INDOOR, and up to 100 m OUTDOOR. To be connected via RS232. A PG9 cable gland for the indicator is included.	•		•																			OBRWPANX-LE	
	External module for Classic WPAN communication. Equipped with 3 m cable. Designed for IP66 rating. Maximum operating distance up to 30 m INDOOR, and up to 100 m OUTDOOR. To be connected via RS232. A PG9 cable gland for the indicator is included.	•		•																			OBRWPANX-CL	
	DIN rail fibre optic/RS232 converter for synthetic fibre optic, max. length 100 m (longer lengths on request). For connection to PC, PLC.																	•	•				FBDIN100	
	Internal Wi-Fi interface. For wireless connection (via access point) to the company computer system.								•	•	•	•											WIFITD-3	

3590 SERIES

WEIGHT INDICATORS

DFW SERIES

INDUSTRIAL PCS
6116 SERIES

WEIGHT REPEATERS

OTHER INSTRUMENTS

WEIGHT TRANSMITTERS

PC SOFTWARE

Communication interfaces

		3590 SERIES																						
		DFW SERIES																						
		6116 SERIES																						
		WEIGHT REPEATERS																						
		WEIGHT TRANSMITTERS																						
		PC SOFTWARE																						
		INDUSTRIAL PCS																						
		WEIGHT INDICATORS																						
	Description	DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code		
	Internal Wi-Fi interface. For wireless connection (via access point) to the company computer system.										•	•	•	•									WIFITD-3	
	Internal Wi-Fi interface. For wireless connection (via access point) to the company computer system.								•						•	•							WIFITPWLK-2	
	Internal Wi-Fi interface with IP69K rating. For wireless connection (via access point) to the company computer system.																						• WIFITD69K	
	Internal Wireless Personal Area Network (WPAN) interface. For wireless connection of the scale to tablets, smartphones, laptop PCs, or barcode readers.						•	•	•	•	•	•	•	•	•								• WPAN-CL	
	Wireless Personal Area Network (WPAN) interface, complete with antenna and IP68/IP69K mounting kit. Requires carrier board (FO-CBD).	•	•	•																			FO-WPANX-LE	
	Wireless Personal Area Network (WPAN) Classic interface, complete with antenna and IP68/IP69K mounting kit. Assembly included. Requires carrier board (FO-CBD).	•	•	•																			FO-WPANX-CL	
	Internal Ethernet interface. 10-100 Mbps speed, TCP, UDP, IP, ARP, ICMP protocols, Ethernet Mac.									•	•	•	•	•	•					•	•	•	ETHD	
	External module for reading and compensation of weighing system inclination, approved for use in third-party relationship, to be combined with DFWX series indicators. Connection in 232 (485 on request). Cable supplied as standard, length 3m.	•		•																			LEVEL3AX	

Connection cables

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code	
	RS232 cable l = 1.5 m for LP542xx, SMTPLUS, PR80 printers.									•	•	•	•	•	•					•		RSCBLP	S1
	RS232 cable l = 10 m for LP542xx, SMTPLUS, PR80 printers.																•	•				RSCBLP10M	S1
	RS232/C - DB9/RJ11 serial cable - l = 1.5 m.						•		•											•	•	RSCBRJ	S1
	RS232/C - DB9/RJ11 serial cable - l = 10 m.						•	•	•	•				•	•					•	•	RSCBRJ10M	S1
	4-core shielded twisted pair cable (2x2x0.34 mm ²), for RS485 communication or analogue output. Inner sheath in polyolefin.	•		•													•					RSCBTW	
	Synthetic fibre optic cable. €/m (Min. 10 m). Warning: requires a set of connectors for CNFOPT fibre optic.									•	•		•	•	•						•	CBFOPT	S2
	Shielded cable 10x0.25 mm ² (suitable for Ex zones). Sheath in PVC, diameter 7.5 mm.	•		•	•												•					CB10P	
	USB PC/RS485 converter cable, l=1.5 m. With PG9 metal cable gland.	•		•					•	•	•			•	•							RSCBUSB485	
	Ethernet cable, l=1.5 m. With cable gland, for connection between indicator and PC network.																					ETHCBRJ	S1
	USB PC/RS232 DB9 converter cable, l=1.5 m. USB/DB9 connector.									•	•	•	•	•	•							RSCBUSBKR	
	USB PC/RS232 converter cable, l = 1.5 m. USB/RJ11 connector.						•															RSCBUSB-1	
	Internal 2.4 GHz radio module. Maximum operating distance in suitable environmental and installation conditions: 45 m indoor, 140 m outdoor. Max. 39 configurable channels. (RF2G4 must be in combination with another radio module).			•					•													RSCBUSBPG	S1
	Multi-core cable (4x2xAWG24) suitable for Ethernet connections in Ex zones (connectors and cable gland only installed with S6 service)																			•	•	ETHCBEX	S6
	(S1) RS232 cable for connection to 3590EGT.																					RSCBSHG	S1
	USB PC/RS232 converter cable, l=1.5 m. USB connector on PC side, tips on scale side. PG9 cable gland included.	•																				RSCBUSB3P	

S1 service includes:

- Installation of the option with the addition of any mechanical accessories (if not included with the option)
- Configuration (if required)
- Testing

Connection cables

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code		
	Description																							
	Ethernet shielded cable 3 m long for connection between scales/network.	•																					ETH3MC	
	Ethernet shielded cable 5 m long for connection between scales/network.	•																					ETH5MC	
	Ethernet cable, length = 5 m. Complete with hygienic cable gland, for connection between indicator and PC network.	•																					ETH5MC-HGX	

Solidly connected control light

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code		
	Description																							
	3-Way control light in stainless steel (for indicators with relay outputs). For solidly connected assembly to stainless steel indicators in "XT" range. Connection cable and power supply from indicator.													•	•								OBCLTI	
	3-Way control light in ABS (for indicators with relay outputs). Audible alarm signal, connection cable, power supply from indicator.									•	•												OBCLTP	

Calendar clock / date & time

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code		
	Description																							
	Calendar clock for printing/ displaying the date and time.	•		•																			FO-CLOCK	
	Calendar clock for printing/ displaying the date and time with PCB, terminals, plastic box and labels with UL marking (if included).					•	•		•	•	•			•	•				•	•	•		DFCLK	

Weight repeaters

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code			
	Weight repeater with 100-mm LED display. Housing in IP68 stainless steel, 5-key keypad, and valve for regulating humidity and pressure.						•		•	•	•	•	•	•	•							•	DGT100R-1		
	Program for transforming weight indicator into repeater. Combine with DFW and DGT range weight indicators.					•	•		•	•	•		•	•	•			•	•	•	•	•	•	MSTSLV	
	Weight repeater with 60-mm LED display. Housing in IP68 stainless steel, 5-key keypad, valve for regulating humidity and pressure, and configurable protocol.																					•	DGT60R-1		
	RS485 alphanumeric repeater with 110-mm multicolour LED display, stainless steel case and IP68 protection rating.																					•	GLR100I		

Columns, support brackets, shields

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code		
	Bracket in stainless steel for mounting "IECEXB" battery on column.															•							EXSTFA12	
	Bracket in stainless steel for mounting ATEX battery on column. Compatible with "DFWBP76ATEX..", "IECEXB", "BP6ESTATEX3GD.." and "BP6V12A".																•			•			STFA12	
	AISI 304 stainless steel bracket, adjustable tilt. For mounting weight indicator on wall.								•	•	•	•		•	•		•	•		•	•		STFR-1	
	AISI 304 stainless steel bracket, wall-mount. For mounting weight indicator.									•	•	•		•	•		•	•		•	•		STFI-1	
	AISI 304 stainless steel bracket, adjustable tilt. For mounting IECEX weight indicators on wall.					•										•				•			EXSTFR	
	AISI 304 stainless steel bracket, wall-mount. For mounting IECEX weight indicators.					•										•				•			EXSTFI	

Options for ATEX installations

	Description	DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code		
	ATEX Declaration of Conformity for equipment. Type: Ex II 3G IIC T6 Gc X and Ex II 3D IIIC T115 °C Dc X, with respective label for assembly, for Dini Argeo ATEX-certified or NON-certified indicator (in the latter case, install in safe zone), connected to mechanical structure with ATEX load cells (each cell must be certified with CCATEX or CCATEX3GD). Supplied with printed document describing assembly and ATEX Declaration of Conformity for equipment (EN, DE, FR, ES and IT).																							
																							DCATEX3GD	

Consumables

	Description	DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code		
	50 thermal paper rolls, length: 30 m, width: 57 mm. Hole: 12 mm. Outer diameter: 51 mm.																							
																							RPT57C	

Digital Inputs / Outputs

	Description	DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code				
	Internal 2 IN / 6 OUT ATEX 3GD interface (requires FW 05.05.00 or higher).																									
	Set of 2 ATEX cable glands for PW200XRDxxx. Specific for use of INPUT/OUTPUT on DFWATEX2GDIO or DFWATEX2GDF.																									
	Set of 2 ATEX cable glands for PW200XRDxxx-1. Specific for use of INPUT/OUTPUT on DFWATEX2GDIO or DFWATEX2GDF.																									
																							DFIO3GD-1			
																								PW200IO		
																									PW200IO-1	

Power supply units

Image	Description	DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code				
	Battery charger for safe zone, for ATEX BP6ESTATEX3GD battery.																			•			BP6CB			
	Complete battery charger for safe zone, for ATEX DFWBP76ATEXD batteries.																	•					DFWBPAL-2			
	External ATEX battery pack, in IP65 stainless steel, for zones 2 and 22.																				•			BP6ESTATEX3GD		
	Rechargeable ATEX battery, for zones 1 and 21. If combined with DFWATEX weight indicator, requires additional BTCB2GD cable.																	•						DFWBP76ATEXD		
	ATEX power supply unit with 230 Vac input. Intrinsically safe 10.5 Vdc output, with Exd enclosure, with the following protection modes: ATEX II 2(2) G Ex d [ib Gb] IIC T4 Gb and ATEX II 2(2)D Ex tb [ib Db] IIIC T140 °C Db.																		•	•					PW200XRD230-1	
	ATEX power supply unit with 24 Vac input. Intrinsically safe 10.5 Vdc output, with Exd enclosure, with the following protection modes: ATEX II 2(2) G Ex d [ib Gb] IIC T4 Gb and ATEX II 2(2)D Ex tb [ib Db] IIIC T140 °C Db.																		•	•					PW200XRD24A	
	ATEX power supply unit with 24 Vdc input. Intrinsically safe 10.5 Vdc output, with Exd enclosure, with the following protection modes: ATEX II 2(2) G Ex d [ib Gb] IIC T4 Gb and ATEX II 2(2)D Ex tb [ib Db] IIIC T140 °C Db.																		•	•					PW200XRD24D-1	

Protection cover

Image	Description	DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code			
	Kit of 10 moulded protective covers in clear plastic. For DFWXP or 3590EXP series indicators with case in ABS.									•	•	•	•											CVRXP	

Digital inputs / outputs

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW ICEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code			
	19-key remote control and infrared receiver kit (max 8 m).					•	•			•	•	•	•										DFTL12-1		
	Radio-frequency remote control and receiver with extension, for installations where other optional boards are required with connection on AMP.								•	•	•	•	•	•	•									TLRP	
	(S1) Radio-frequency remote control and receiver. 433 MHz, 6 keys, for use up to 50-m distance, in suitable environmental conditions (not compatible with repeater indicator or MSTSLV option).																						• TLR-1		
	Radio frequency 868 MHz 6 keys remote control and Radio frequency receiver box, for external installation. Fitted with 3 m cable. To be connected over a RS232 port. Includes an extra PG9 cable gland for installation.	•	•																					REMOTE	

S1 service includes:

- Installation of the option with the addition of any mechanical mounting accessories (if not included with the option)
- Configuration (if required)
- Testing

Optional power supply cables

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW ICEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code		
	Version with AU power cable.								•	•	•	•		•	•								• PWCORDAUS	
	Version with SEV1011 power cable (CH plug).	•	•	•					•	•	•	•		•	•								• PWCORDCH	
	Version with BS1363 power cable (UK plug).								•	•	•	•		•	•								• PWCORDUK	
	Version with US type-B power cable (Japan, North and Central America).								•	•	•	•		•	•								• PWCORDUS	

PG cable glands

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code	
	Set of 10 PG7 metal cable glands for weight indicators. With ring nuts and seals.	•		•					•					•	•							•	PG7M
	Set of 10 PG7 cable glands for indicators in ABS. With ring nuts and seals.					•	•			•	•	•											PG7P
	Set of 10 PG9 metal cable glands for weight indicators. With ring nuts and seals.	•		•					•					•	•							•	PG9M
	Set of 10 PG9 cable glands for indicators in ABS. With ring nuts and seals.					•	•			•	•	•											PG9P
	Set of 10 PG7 metal cable glands for ATEX indicators. With ring nuts and seals. Cable diameter: from 3 to 6.5 mm.																•	•				•	PG7EX
	Set of 10 PG9 metal cable glands for ATEX indicators. With ring nuts and seals. Cable diameter: from 4 to 8 mm.																•	•				•	PG9EX
	Set of 10 PG11 metal cable glands for weight indicators.																					•	PG11M
	Set of 10 PG13 metal cable glands for weight indicators.	•		•																		•	PG13M
	Single hygienic PG9 cable gland for DFWX-HGX.		•																				PG9-HGX

RS485 barriers

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code	
	Special power supply for active barrier ZB485.																	•	•				ZBPWR24
	Active barrier RS485. Marking: ATEX II (1) GD [EEx ia] IIC, I (M2) [EEx ia] I, II 3G Ex nA II T4, [Ex ia] IIC. 24 Vdc power supply not included, we recommend combining with ZBPWR24.																	•	•				ZB485

Floor columns

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFWIECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code		
	Column in stainless steel, 450 x 450 mm, h = 917 mm, Ø 38 mm. Base in painted steel. For Dini Argeo and SCALE HOUSE indicators.					•	•	•	•	•	•			•	•								CSP38	
	Column in stainless steel, 350 x 350mm mm, h = 750 mm. Base in painted steel. For Dini Argeo and SCALE HOUSE indicators.					•	•	•	•	•	•			•	•		•						CSP38D	
	Column in AISI 304 stainless steel, 450 x 450 mm, h = 917 mm, Ø 38 mm. For Dini Argeo and SCALE HOUSE indicators.					•	•	•	•	•	•			•	•					•	•		CSP38I-1	
	Support bracket for DFWX series indicators, DFWXB, DFWX-ETH, DFWXB-WIFI.	•		•																			DFWXCL	
	Stainless Steel column, length 350 mm, for installation integral with T, TE, PB, PBI series platforms. Indicator support bracket excluded, (to be combined with DFWXCL or 3590CL). NOTE: -2 column models do not include the indicator holder bracket.	•		•																			TCBI350-2	
	Stainless Steel column, length 500 mm, for installation integral with T, TE, PB, PBI series platforms. Indicator support bracket excluded, (to be combined with DFWXCL or 3590CL).	•		•																			TCBI500-2	
	Stainless Steel column, length 700 mm, for installation integral with T, TE, PB, PBI series platforms. Indicator support bracket excluded (to be combined with DFWXCL or 3590CL).	•		•																			TCBI700-2	
	AISI 304 stainless steel column, h = 900 mm, Ø 38 mm. Painted steel base 350 x 350 mm.	•																					CLD-900	
	AISI 304 stainless steel column, h = 900mm, Ø 38 mm. 450 x 450 mm stainless steel base.	•																					CLI-900	
	AISI 316 stainless steel column h = 350 mm, for integrated installation with DFWX-HGX indicators. Easy-to-clean construction with a fifth support foot for greater stability and carrying handle. Note: The length of the cell cable is reduced to 1 metre.	•																					HGXCL-350	

3590 SERIES

WEIGHT INDICATORS

DFW SERIES

6116 SERIES

INDUSTRIAL PCS

WEIGHT REPEATERS

OTHER INSTRUMENTS

WEIGHT TRANSMITTERS

PC SOFTWARE

Floor columns

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code		
	Description																							
	AISI 316 stainless steel column h = 500 mm, for integrated installation with DFWX-HGX indicators. Easy-to-clean construction with a fifth support foot for greater stability and carrying handle. Note: The length of the cell cable is reduced to 1 metre.		•																					
																							HGXCL-500	

ATEX 2GD push-button panel

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFW IECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code		
	Description																							
	Armoured cable 4x0.5 mm ² (suitable for Ex zones). Inner sheath in PVC. Armour: galvanised steel wire braid. External sheath in PVC, diameter 7.3 mm.				•											•	•	•	•	•			EXACB4	
	EX 2GD push-button panel with 2 buttons and cable gland (optional connection cable). Protection: II 2G Ex db eb IIC T6 Gb for gas, II 2D Ex tb IIIC T80 °C Db for dust.				•											•	•	•	•	•			EXPHBN	

Other options

		DFWX	DFWX HYGIENX®	DFWXS	DFWIECEXBATCH1	DFWL	DFWLB	DFWPM	DFWLI	DFWXP	DFWR	DFWT	DFWKR	DFWDXT	DFWKXT	DFWIECEX	DFWATEX	DFWATEX2GDF	DFWIECEX3GD	DFWATEX3GD	DFWK HYGIENX®	Code		
	Technical support by telephone upon request.					•	•		•	•	•			•	•		•	•	•	•	•	•	TECSUP	
	Printed technical manual (downloadable for free from the website).					•	•		•	•	•			•	•			•				•	TECMAN	
	Printed user manual (downloadable for free from the website, in the "DOCUMENTS" section on the Home Page, by entering the product serial number).					•	•		•	•	•			•	•			•				•	UMAN	
	EU Declaration of Conformity, EU verification certificate, test certificate and metrology booklet, in printed format (downloadable for free from the website, available only for CE-M approved scales). € NET.					•	•		•	•	•			•	•			•	•	•	•	•	ECEMDOC	
	Valve for regulating humidity and pressure inside the case. Recommended for IP68 applications.								•					•	•								VENT	
	Valve for regulating humidity and pressure inside the case. Recommended for IP68 applications.																•	•					VENTX	

3590 SERIES

WEIGHT INDICATORS

DFW SERIES

INDUSTRIAL PCS
6116 SERIES

WEIGHT REPEATERS

OTHER INSTRUMENTS

WEIGHT TRANSMITTERS

PC SOFTWARE



INDUSTRIAL PCS

6116 SERIES

The 6116 series of Dini Argeo industrial PCs, ideal for harsh industrial environments, features a touchscreen display and enables loading any weighing program for advanced systems.

With the MCI Myrias software program, standard and customised software solutions can be provided to meet all weighing needs, such as: offline sampling, dynamic and manual checkweighing, truck weighing, pallet weighing, traceability, recipe, data manager, belt weighing and stock control.

In addition to weighing, dosing, totalisation and formulation functions, the 6116 range has two important aspects, namely PC-controlled weighing and PLC-controlled weighing and filling.

6116 SERIES



6116EVO

6116EVOBOX

		6116EVO	6116EVOBOX
PLUS	Thermal printer	○	●
	RFID reader	○	●
COMMUNICATION	Multi-language program	●	●
	Serial ports	-	● (x2) RS232 ● (x1) RS485/RS422 **
	USB ports	● (x2) 3.1 Type A, internal *** ● (x2) 2.0 Type A, panel	● (x2)
	TCP/IP Ethernet	●	●
	SD memory	○	○
	Wi-Fi	○	-
IN/OUT	Inputs	● (x2) *	○
	Outputs	● (x2) *	○
HARDWARE	Case	AISI 304 stainless steel	AISI 304 stainless steel
	Dimensions	375x327x65 mm	474x656x400 mm
	Touchscreen display	●	●
	Max display brightness	800 nits	1000 nits
	Processor	High-performance Intel 4 core	Intel Celeron N2930 QuadCore 64bit
	Operating system	Windows 10 IoT	Windows 10 IoT Enterprise LTSC
	RAM memory	DDR3L, 8 Gb	DDR3L, 4 Gb
	SSD	mSATA, 64 Gb	SATA III, 128 Gb
	IP rating	IP67	IP54
	Power supply	110-240 Vac	110-240 Vac
	Adjustable tilt bracket	●	-
OIML	Connectable scales	4 *	○
	No. connectable load cells	up to 16 x 350 Ω cells *	○

LEGEND: ● Standard ○ Optional - Not available

* 6116EVO4X and 6116EVO4XKB versions

** Replaces one RS232 port

*** x1 in versions 6116EVO4X and 6116EVO4XKB

6116EVO

PC WITH 10.1" TOUCHSCREEN DISPLAY

Rugged and durable industrial touchscreen PC in AISI 304 stainless steel with IP67 protection rating, designed for advanced and harsh industrial environments. Featuring the latest Intel 4-core processor, it allows loading any weighing program developed on Windows 10 and can manage up to 4 scales.



Version codes

	DESCRIPTION	CODE	
	High-performance industrial touchscreen PC, in IP67 stainless steel	6116EVO-1	
	High-performance industrial touchscreen PC, in IP67 stainless steel. Integrated high-speed 4-channel weighing board configurable exclusively from PC. NOTE: when used for type-approved applications, add the optional D-LEGAL program.	6116EVO4X	
	High-performance industrial touchscreen PC, in IP67 stainless steel. Integrated high-speed 4-channel weighing board configurable from PC and via keypad and display on rear panel.	6116EVO4XKB	

Why choose

Thanks to the Myrias PC software, you can create numerous weighing solutions:

- Dynamic checkweigher
- Truck scale and axle scale
- Pallet weighing
- Traceability
- Belt weighing
- Stock control
- Manual checkweigher
- Offline sampling
- Recipes
- Data Manager

Main features

VIRTUAL ALIBI MEMORY AND OPTIONAL API FOR THE DEVELOPMENT OF APPROVED PROGRAMS:

- The 6116EVO has two optional programs, designed to facilitate communication with the integrated electronic part of the scale via APIs and the saving of weighing data, also approved as legal for trade:
 - D-API: Software for internal use for saving weighing results and API libraries (cannot be combined with AF6116).
 - D-LEGAL: Type-approved software for saving weighing results and API libraries (cannot be combined with AF6116).

INTEGRATED MULTISCALE ELECTRONIC PART OF THE SCALE, CERTIFIABLE (6116EVO4X AND 6116EVO4XKB):

- Thanks to the integrated multi-channel electronic part of the scale, it is possible to:
 - Read the weight of one or more scales, up to 4.
 - Connect up to 4 load cells and read the equalised weight, in "digital equalisation box" mode.
- Connectable load cells (via junction box): up to 16 x 350 Ω.
- Selectable sampling speed, up to 2600 Hz single-channel, 200 Hz for 2 channels, or 90 Hz for 3-4 channels.
- Thanks to the type-approved D-LEGAL software, 6116EVO can be approved for legal-for-trade commercial applications.

AVAILABLE INPUTS/OUTPUTS:

	6116EVO-1	6116EVO4X	6116EVO4XKB
Internal USB 3.1 Type-A ports	2	1	1
Panel USB 2.0 ports	2	2	2
Internal Gigabit Ethernet port, 10/100/1000 Mbps	1	1	1
Gigabit-Ethernet RJ45 panel port, 10/100/1000 Mbps	1	1	1
Internal VGA port	1	1	1
Internal HDMI port	1	1	1
Audio IN	1	1	1
Audio OUT	1	1	1
Digital inputs	1	2	2
Digital outputs	0	2	2
Scale inputs	0	4	4


Technical features

Processor	High-performance Intel 4 core
Operating system	Windows 10 IoT
RAM memory	DDR3L, 8 Gb
SSD	mSATA, 64 Gb
Touchscreen display	•
Max display brightness	800 nits
DB9 serial ports	-
USB ports	<ul style="list-style-type: none"> • x2 3.1 Type A, internal (***) • x2 2.0 Type A, panel
TCP/IP Ethernet	•
Dimensions	375x327x65 mm
SD memory	O
Wi-Fi	-
Thermal printer	-
RFID reader	-
Inputs	• x2 (*)
Outputs	• x2 (*)
Case	AISI 304 stainless steel
IP rating	IP67
Power supply	110-240 Vac
Multi-language program	•
Adjustable tilt bracket	•
Connectable scales	4 (*)
No. connectable load cells	up to 16 x 350 Ω cells (*)

(*) 6116EVO4X and 6116EVO4XKB versions

(***) x1 in versions 6116EVO4X and 6116EVO4XKB

Technical drawing (mm)

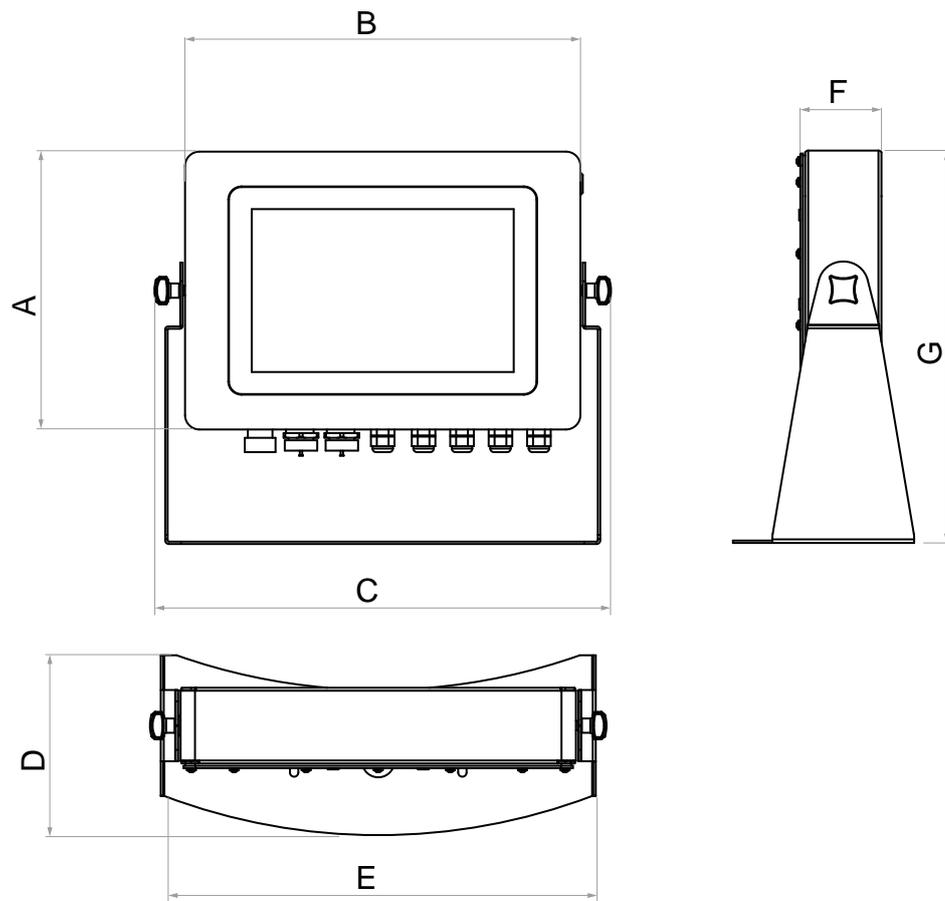

Dimensions			
A	233 mm	E	362 mm
B	329 mm	F	67.5 mm
C	380 mm	G	329 mm
D	151 mm		

6116EVOBOX

PC WITH 10.1" TOUCHSCREEN DISPLAY

Interactive kiosk with 10.1-inch industrial PC ideal for self-service weighbridges, equipped with RFID card reader and printer to facilitate operator entry and exit. For efficient access management, the Myrias software can be integrated with the 6116EVO-BOX to record load data and empty vehicle weight, read vehicle and trailer identification data, weigh multi-axle vehicles and check the contents inventory.



STAINLESS
STEEL



USB PORT



Version codes

	DESCRIPTION	CODE	
	Stainless steel column- or wall-mounted box with industrial PC, 10.1-inch touchscreen display and preinstalled Windows 10 operating system. Equipped with a thermal printer and RFID card reader.	6116EVO-BOX-1	

Why choose

- Waterproof, satin-finish, stainless steel case.
- High-brightness display for outdoor use.
- With thermal printer with cutter.
- Automatic internal temperature control system.
- Equipped with sun and weather protection shield for outdoor use.

Main features

VIRTUAL ALIBI MEMORY AND OPTIONAL API FOR THE DEVELOPMENT OF APPROVED PROGRAMS:

- The 6116EVO has two optional programs, designed to facilitate communication with the integrated electronic part of the scale via APIs and the saving of weighing data, also approved as legal for trade:
 - D-LEGAL: Type-approved software for saving weighing results and API libraries (cannot be combined with AF6116).
 - D-API: Software for internal use for saving weighing results and API libraries (cannot be combined with AF6116).

MAIN OPTIONS:

- Integrated electronic part of the scale, with digital inputs and outputs.
- Numeric or alphanumeric weight repeater.
- RFID cards.
- Ready for metric approval (only with integrated weight transmitter).
- Coin slot available on request (ask for quote).

AVAILABLE INPUTS/OUTPUTS:

- 2 USB 2.0 ports.
- 2 Gigabit-Ethernet ports, 10/100/1000 Mbps.
- 2 RS232 serial ports.

Technical features

Processor	Intel Celeron N2930 QuadCore 64bit
Operating system	Windows 10 IoT Enterprise LTSC
RAM memory	DDR3L, 4 Gb
SSD	SATA III, 128 Gb
Touchscreen display	●
Max display brightness	1000 nits
DB9 serial ports	● x2 RS232 ● x1 RS485/RS422 (**)
USB ports	● x2
TCP/IP Ethernet	●
Dimensions	474x656x400 mm
SD memory	○
Wi-Fi	-
Thermal printer	●
RFID reader	●
Inputs	○
Outputs	○
Case	AISI 304 stainless steel
IP rating	IP54
Power supply	110-240 Vac
Multi-language program	●
Adjustable tilt bracket	-
Connectable scales	○
No. connectable load cells	○

(**) Replaces one RS232 port

3590 SERIES

WEIGHT INDICATORS

DFW SERIES

INDUSTRIAL PCS
6116 SERIES


WEIGHT REPEATERS

OTHER INSTRUMENTS

WEIGHT TRANSMITTERS

PC SOFTWARE

Technical drawing (mm)

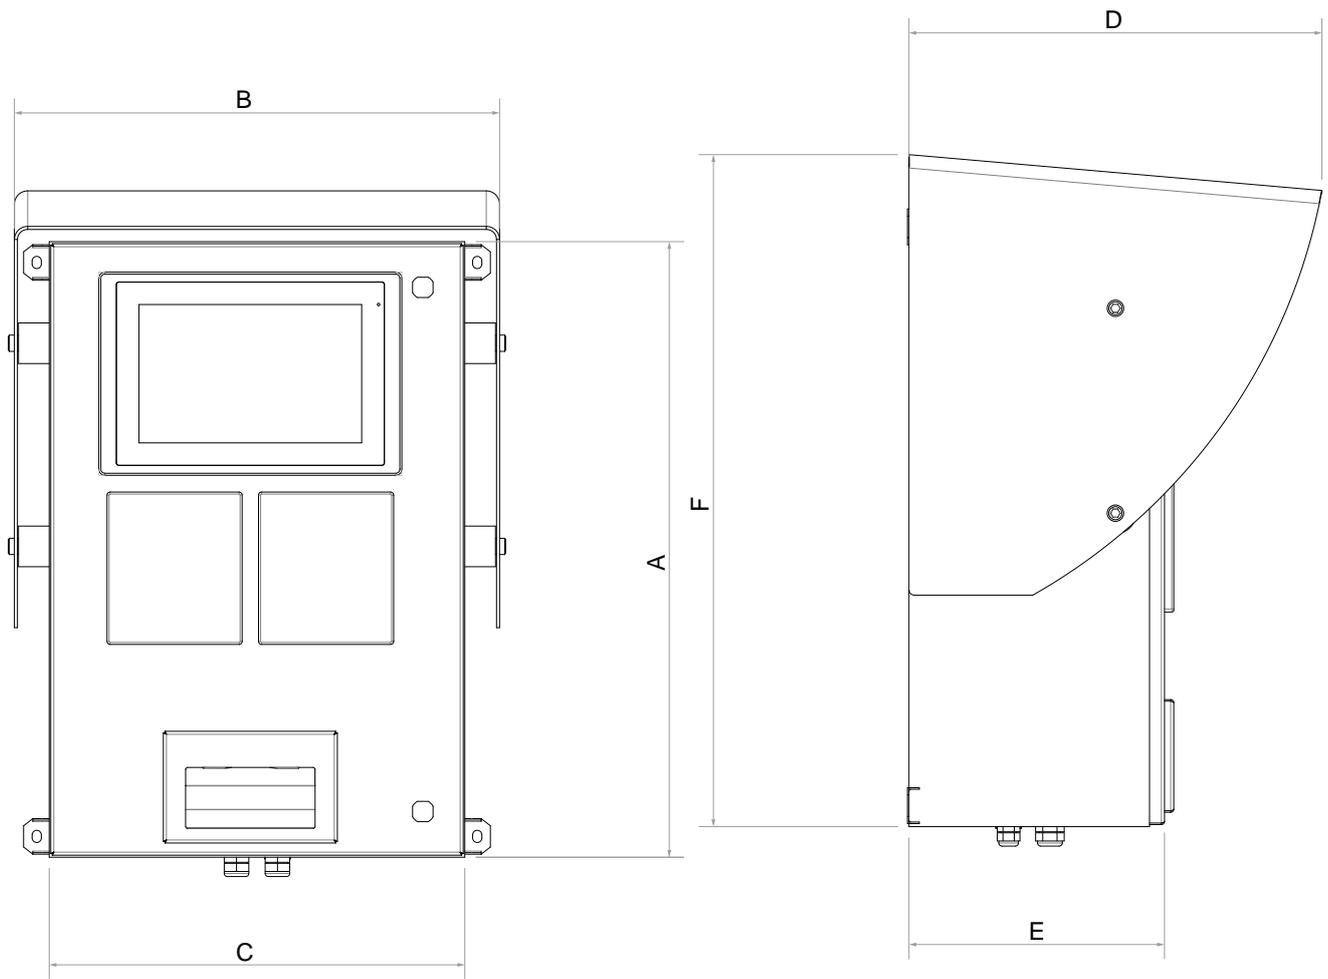

Dimensions			
A	606 mm	D	400 mm
B	474 mm	E	248 mm
C	406 mm	F	656 mm

LIST OF MAIN
OPTIONS AND ACCESSORIES
6116 SERIES

Main options and accessories

	Description	6116EVO	6116EVOBOX	Code
	Protection circuit for 485 port, with case for installation on DIN rail. Protection according to IEC 1000-4-5/D (IEC 801-5/D).	•		RS485PDIN
	Type-approved software for recording weighing results to a PC (virtual alibi function) with an integrated API library for interfacing with other software.	•	•	D-LEGAL
	RS485 alphanumeric repeater with 110-mm multicolour LED display, stainless steel case, and IP68 protection rating.	•	•	GLR100I
	Software for recording weighing results to a PC (for internal use) with an integrated API library for interfacing with other software.	•	•	D-API
	Management of truck scales. Advanced weighing module.	•		TRA-WBD

Approval

	Description	6116EVO	6116EVOBOX	Code
	Welmec plates and module for a scale. Service available in combination with Dini Argeo indicator.	•	•	KCEM

Connection cables

	Description	6116EVO	6116EVOBOX	Code
	4-core shielded twisted pair cable (2x2x0.34 mm ²), for RS485 communication or analogue output. Inner sheath in polyolefin. Shielding with tinned copper braid. External sheath in PVC, diameter 7 mm.	•		RSCBTW
	USB PC/RS485 converter cable, l=1.5 m. With PG9 metal cable gland.	•	•	RSCBUSB485

Weight repeaters

		6116EVO	6116EVOBOX		
	Description			Code	
	Ex-works installation.			• S6	
	Weight repeater with 100-mm LED display. Housed in IP68 stainless steel, with a 5-key keypad and a valve for regulating humidity and pressure.			• DGT100R-1	

Consumables

		6116EVO	6116EVOBOX		
	Description			Code	
	Thermal paper roll, width: 80 mm. Hole: 25 mm. Outer diameter: 60 mm.			• RPT80SELF	

Related transmitters/weight indicators

		6116EVO	6116EVOBOX		
	Description			Code	
	High-speed weight transmitter for DIN rail with 4 channels. 2 IN and 2 OUT. 5-key keypad, LED display.			• DGT4X	
	Weight transmitter for DIN rail, with 2 IN and 4 OUT. 5-key keypad, LED display. Multifunctional weighing program.			• DGT1SX	

Additional PG cable glands

		6116EVO	6116EVOBOX		
	Description			Code	
	Set of 10 PG9 metal cable glands for weight indicators. With ring nuts and seals.			• PG9M	
	Kit of 10 metal expanders PG9 to PG11, IP68 (max. cable ø 12 mm)			• PG9PG11C	
	Kit of 10 metal expanders PG9 to PG13, IP68 (max. cable ø 12 mm)			• PG9PG13C	

Optional power supply cables

	Description	6116EVO	6116EVOBOX	Code
	Version with AU power cable.	•	•	PWCORDAUS
	Version with SEV1011 power cable (CH plug).	•	•	PWCORDCH
	Version with BS1363 power cable (UK plug).	•	•	PWCORDUK
	Version with US type-B power cable (Japan, North and Central America).	•	•	PWCORDUS

Other options

	Description	6116EVO	6116EVOBOX	Code
	Set of 10 RFID cards for use with RFID reader.	•		RFIDCARD
	Language pack service, for industrial PC 6116 (language of your choice).	•	•	CNFLANG
	EU Declaration of Conformity, EU verification certificate, test certificate and metrology booklet, in printed format (downloadable for free from the website, available only for CE-M approved scales). € NET.	•		ECEMDOC
	Technical support by telephone upon request.	•		TECSUP
	AFxx Suite for PC 6116EVO4X / 6116EVO4XKB. Includes 5 AF applications (Weight Totalisation, Parts Counter, Vehicle Weighing, Statistical Checks, Industrial Pricing) selectable from the user interface.	•	•	AF6116



DINI AR GEO
Scales - Weighing systems

> 0 <

~

NET

W1

W2

FUN.

kg

ZERO

TARE

MODE

PRINT

ON/OFF



OTHER INSTRUMENTS

WEIGHT REPEATERS

The Dini Argeo range of repeaters meets all weight display needs, even from a considerable distance.

Each model stands out for its material, size, application and setting in which it can be used, depending on the connected indicator.

The typical application of repeaters is weighing/filling controlled by PLC.

WEIGHT REPEATERS



GLR100

GLR100I

DGT100

DGT60 /
DGT603GD

DFWPM

	GLR100	GLR100I	DGT100	DGT60 / DGT603GD	DFWPM	
COMMUNICATION	RS485 serial port	● (x1)	● (x1)	● (x1)	● (x1)	-
	RS232 serial port	-	-	● (x1)	● (x1)	-
	Serial connection cable	● 10m	○	○	○	-
	USB connection for quick programming from PC with DINITOOLS	-	-	-	-	-
	Alibi memory	-	-	○	●	-
	Wireless Personal Area Network (WPAN)	-	-	○	-	-
	2.4 GHz radio-frequency module	● *	○	○	○	●
	Wireless Personal Area Network (WPAN) interface	-	-	-	-	-
IN/OUT	Electronic outputs	-	-	2	2	-
	Digital inputs	-	-	2	2	-
	Analogue output (0...5 Vdc, 0...10 Vdc, 0...20 mA, 4...20 mA)	-	-	-	-	-
HARDWARE	Dimensions (mm) (L x H x W)	835 x 190 x 50 mm	688 x 250 x 57 mm	433 x 205 x 202 mm	410 x 165 x 67 mm	173 x 98 x 54 mm
	Display	Red 110-mm LEDs	Red 110-mm LEDs	Red 100-mm LEDs	Red 60-mm LEDs	25-mm backlit LCD
	Keypad	-	-	5 keys, mechanical, waterproof	5 keys, mechanical, waterproof	5 keys, mechanical, waterproof
	Case	Painted steel	Stainless steel	Stainless steel	Stainless steel	ABS HANDY
	Power supply	110-240 Vac (internal power supply unit)	Rechargeable battery			
	Working temperature: Indoor use / CE-M / humidity	-	-	-20...+60 °C / -10...+40 °C / 85%	-	-
	IP rating	IP54	IP68	IP68	IP68	IP65

LEGEND: ● Standard ○ Optional - Not available

* only model GLR100-2G4

GLR100

RGB SUPER-BRIGHT LED MATRIX DISPLAY

GLR100 alphanumeric weight repeater with RGB bright LED matrix, for easy large-digit weight display even over long distances.



Version codes

	DESCRIPTION	CODE	
	RS485 alphanumeric repeater with multicolour 110-mm LED display. Complete with 10-m RS485 cable with IP67 connector.	GLR100	
	Radio alphanumeric repeater with multicolour 110-mm LED display.	GLR100-2G4	

Why choose

- RGB technology with control light function (yellow, red, green), synchronised with connected weight indicator.
- Painted steel casing with IP54 protection rating, for indoor or outdoor use.
- Alphanumeric display board mode for displaying gross and tare weights, in the selected language.
- The GLR100 repeater also has on-demand features such as fully customisable messages, screen saver with date and time, and scrolling texts.
- Dimensions: 605x150 mm.
- CE-M certifiable (OIML R-76 / EN 45501).

Main features

COMMUNICATION PORTS:

- RS485 port for long-distance transmission (up to 1000 m) or radio transmission (up to 70 m indoor, 150 m outdoor). Combine with indicator with RS485 communication port or radio. RS485 cable with 10-m IP67 connector supplied as standard.

Technical features


RS485 serial port	● x1
RS232 serial port	-
Serial connection cable	● 10m
USB connection for quick programming from PC with DINITOOLS	-
Alibi memory	-
Wireless Personal Area Network (WPAN)	-
2.4 GHz radio-frequency module	● (*)
Electronic outputs	-
Digital inputs	-
Analogue output 0...5 Vdc, 0...10 Vdc, 0...20 mA, 4...20 mA	-
Wireless Personal Area Network (WPAN) interface	-
Dimensions (mm) (LxHxW)	835 x 190 x 50 mm
Display	Red 110-mm LEDs
Keypad	-
Case	Painted steel
Power supply	110-240 Vac (internal power supply unit)
Working temperature: Indoor use / CE-M / Humidity	-
IP rating	IP54
Backlit LCD display	●
Specific display	-
Keypad	Mechanical
Case	AISI 316 stainless steel
IP rating	IP68 and IP69K

(*) Only model GLR100-2G4

Approvals

- Australian legal for trade certificate of approval (NMI S788)

Technical drawing (mm)

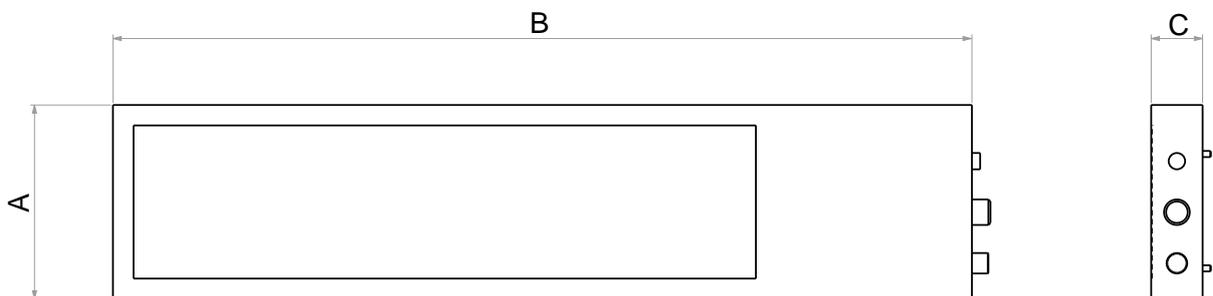

Dimensions			
A	190 mm	C	50 mm
B	835 mm		

GLR100I

RGB SUPER-BRIGHT LED MATRIX DISPLAY

Alphanumeric weight repeater in stainless steel with IP68 protection rating, suitable for outdoor use. For a clear and readable data display, even from a long distance, thanks to the RGB bright LED matrix display. Offers a variety of operation modes for every need.



STAINLESS
STEEL



IP68



Version codes

	DESCRIPTION	CODE	
	RS485 alphanumeric repeater with 110-mm multicolour LED display, stainless steel case, and IP68 protection rating.	GLR100I	

Why choose

- 110-mm 6-digit weight repeater.
- Alphanumeric display board for displaying gross and tare weights, in the selected language.
- Colour management with control light function of data display (red, yellow, green), synchronised with the connected weight indicator.
- Option to customise messages, set screen saver with date and time, and scrolling texts upon request.

Main features


COMMUNICATION PORTS:

- RS485 port for long-distance transmission (up to 1000 m) or radio transmission (optional, up to 70 m indoor, 150 m outdoor). Combine with indicator with RS485 communication port or radio.

Technical features

RS485 serial port	● x1
RS232 serial port	-
Serial connection cable	○
USB connection for quick programming from PC with DINITOOLS	-
Alibi memory	-
Wireless Personal Area Network (WPAN)	-
2.4 GHz radio-frequency module	○
Electronic outputs	-
Digital inputs	-
Analogue output 0...5 Vdc, 0...10 Vdc, 0...20 mA, 4...20 mA	-
Wireless Personal Area Network (WPAN) interface	-
Dimensions (mm) (LxHxW)	688 x 250 x 57 mm
Display	Red, 110-mm LEDs
Keypad	-
Case	Stainless steel
Power supply	110-240 Vac (internal power supply unit)
Working temperature: Indoor use / CE-M / Humidity	-
IP rating	IP68

Technical drawing (mm)

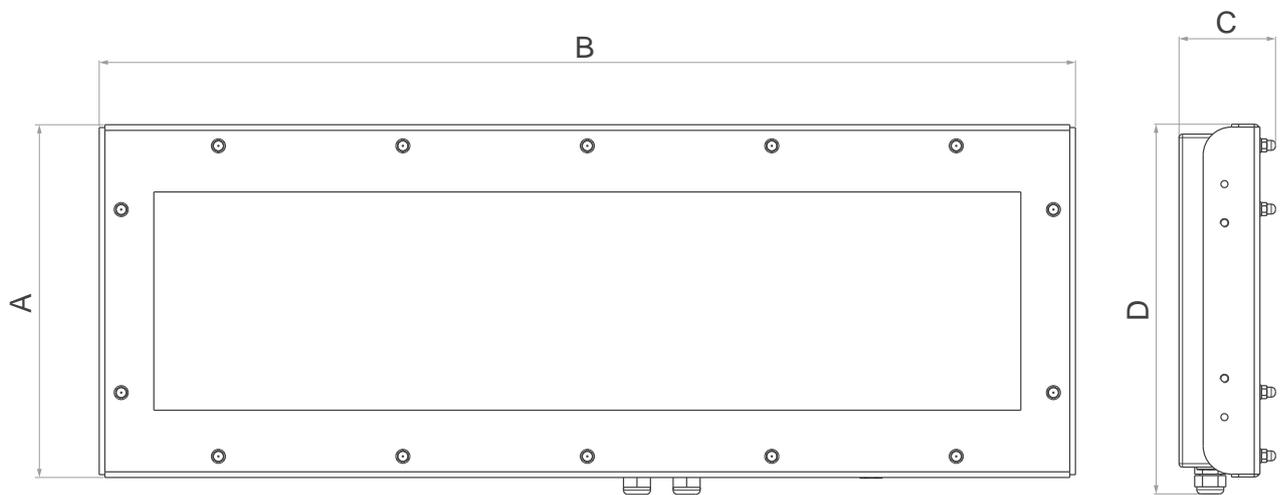

Dimensions			
A	250.5 mm	C	68 mm
B	688 mm	D	262.5 mm

DGT100

RGB SUPER-BRIGHT LED MATRIX DISPLAY

The DGT100 maxi weight repeater ensures excellent weight display outdoors, even from over 25 m distance, even in strong sunlight. With an AISI 304 stainless steel case with IP68 protection rating to withstand water and dust, and fixing bracket for wall-mount.



OIML APPROVED



AISI304 STAINLESS STEEL



IP68



UNIVERSAL BRACKET

Version codes

	DESCRIPTION	CODE	
	Weight indicator with 100-mm LED display. Housed in IP68 stainless steel, with a 5-key keypad and a valve for regulating humidity and pressure.	DGT100BC-1	
	Weight indicator with 100-mm LED display and analogue output. Housed in IP68 stainless steel, with a 5-key keypad and a valve for regulating humidity and pressure.	DGT100AN-1	
	Weight indicator with 100-mm LED display and Profibus module. Housed in IP68 stainless steel, with a 5-key keypad and a valve for regulating humidity and pressure.	DGT100PB-1	
	Weight repeater with 100-mm LED display. Housed in IP68 stainless steel, with a 5-key keypad and a valve for regulating humidity and pressure.	DGT100R-1	

Why choose

- High efficiency SMD bright LED matrix display.
- Brightness setting software from keypad.
- Anti-condensate valve as standard.
- Available in scale or weight repeater version.
- Up to 8 signal linearisation points with DINITOOLS.
- EU Type Examination Certificate (2014/31/EU), OIML R-76, OIML R-61 (MID), OIML R-51 (MID), Australian approval.

Main features

I/O SECTION:

- RS232 bidirectional port for connection to printer, PC, or other external units.
- RS485 bidirectional port for connection to PC, PLC, etc.
- PROFIBUS bidirectional port (Model DGT100PB).
- 2 MOSFET outputs, 150 mA 48 Vac / 150 mA 60 Vdc (NO), with configurable functions.
- 2 inputs (optocouplers) 12÷24 Vdc, 5 mA min - 20 mA max, with configurable functions.
- 16-bit analogue output (Model DGT100AN) optionally 4-20 mA, 0-5Vdc or 0-10 Vdc; maximum applicable load in current: 300 Ohm, minimum applicable resistance in voltage: 1 kohm.

FUNCTIONS:

- KEYPAD - Zeroing; Semi-automatic and presettable tare; Print and/or send data; Power-on/Stand-by.
- PROGRAM FUNCTIONS - Setpoint, high resolution, peak, alibi memory, unit conversion.
- EXTERNAL INPUTS - Key pressure simulation, keypad disabling.
- MOSFET OUTPUTS - Setpoints on weight, either positive (in loading) or negative (in unloading), or on pieces (counting mode), with programmable on/off thresholds, direct control or stability.
- SERIAL PORTS - On all models: Reading of net, gross, tare weight; Zeroing; Semi automatic and presettable tare; Scale change; Setting of output activation thresholds; Reading/Writing alibi memory. DGT100BC and DGT100AN models: Reading of microvolts or ADC converter for all channels; Message display; Printing; PMU setting in piece counting; Simulation of key pressure; MODBUS serial protocol.
- 16-bit ANALOGUE OUTPUT on DGT100AN Value proportional to net weight or gross weight, either in positive (in loading) or in negative (in unloading).

DGT100R REPEATER

- Version with dedicated program for using the indicator as universal weight repeater or multi-scale (MASTER) in combination with DFW/DGT/MCW.

OPERATING MODES:

- Multi-scale repeater (MASTER): mode for repeating up to 32 independent scales, with option to manage their functions, or viewing and printing the sum of the weights of all scales.
- UNIVERSAL weight repeater: mode for repeating the weight of any scale, via configuration of input string.


Technical features

RS485 serial port	● x1
RS232 serial port	● x1
Serial connection cable	○
USB connection for quick programming from PC with DINITOOLS	-
Alibi memory	○
Wireless Personal Area Network (WPAN)	○
2.4 GHz radio-frequency module	○
Electronic outputs	2
Digital inputs	2
Analogue output (0...5 Vdc, 0...10 Vdc, 0...20 mA, 4...20 mA)	-
Wireless Personal Area Network (WPAN) interface	
Dimensions (mm) (LxHxW)	433 x 205 x 202 mm
Display	Red 100-mm LEDs
Keypad	5 keys, mechanical, waterproof
Case	Stainless steel
Power supply	110-240 Vac (internal power supply unit)
Working temperature: Indoor use / CE-M / Humidity	-20...+60 °C / -10...+40 °C / 85%
IP rating	IP68

Approvals

- EC Type Examination Certificate (2014/31/EU)
- OIML R76
- OIML R61 - MID
- OIML R51
- Australian legal for trade certificate of approval (NMI S788)

Technical drawing (mm)

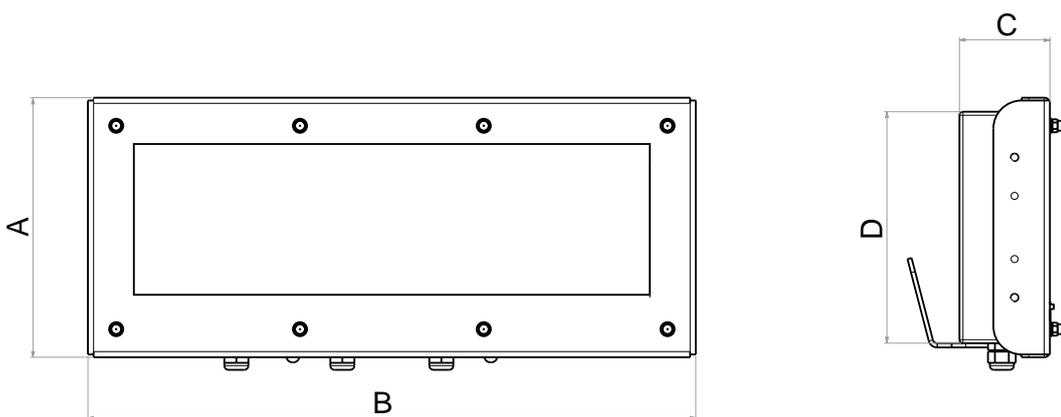

Dimensions			
A	185 mm	C	64 mm
B	430 mm	D	165 mm

DGT60

LARGE RED LED MATRIX DISPLAY

Maxi weight repeater with large, high-intensity red LED display, sturdy and compact thanks to IP68 stainless steel case. For viewing weights from any angle, even in strong sunlight.



Version codes

	DESCRIPTION	CODE	
	Weight indicator with 60-mm LED display. Housed in IP68 stainless steel, with a 5-key keypad and a valve for regulating humidity and pressure.	DGT60BC-1	
	Weight repeater with 60-mm LED display. Housed in IP68 stainless steel, with a 5-key keypad and a valve for regulating humidity and pressure, and configurable protocol.	DGT60R-1	
	Weight indicator with 60-mm LED display and analogue output. Housed in IP68 stainless steel, with a 5-key keypad and a valve for regulating humidity and pressure.	DGT60AN-1	
	Weight indicator with 60-mm LED display and Profibus port. Housed in IP68 stainless steel, with a 5-key keypad and a valve for regulating humidity and pressure.	DGT60PB-2	

Why choose

- Waterproof 5-key functional keypad.
- Large, 6-digit, 60-mm display, visible from over 25 m distance.
- With fixing bracket for wall-mount.
- Available in scale or weight repeater version.
- With valve for regulating humidity and pressure inside indicator as standard.
- CE-M EN 45501, OIML R-76, OIML R-61 (MID), OIML R-51 (MID), Australian approval.

Main features

I/O SECTION:

- RS232 bidirectional port for connection to printer, PC, or other external units.
- RS485 bidirectional port for connection to PC, PLC, etc.
- PROFIBUS bidirectional port (Model DGT60PB).
- 2 MOSFET outputs, 150 mA 48 Vac / 150 mA 60 Vdc (NO), with configurable functions.
- 2 inputs (optocouplers) 12÷24 Vdc, 5 mA min - 20 mA max, with configurable functions.
- 16-bit analogue output (Model DGT60AN) optionally 4-20 mA, 0-5Vdc or 0-10 Vdc; maximum applicable load in current: 300 Ohm, minimum applicable resistance in voltage: 1 kohm.

DGT60BC / DGT60AN / DGT60PB FUNCTIONS:

- KEYPAD - Zeroing; Semi-automatic and presettable tare; Print and/or send data; Power-on/Stand-by.
- PROGRAM FUNCTIONS - Setpoint, high resolution, peak, alibi memory, unit conversion.
- EXTERNAL INPUTS - Key pressure simulation, keypad disabling.
- MOSFET OUTPUTS - Setpoints on weight, either positive (in loading) or negative (in unloading), or on pieces (counting mode), with programmable on/off thresholds, direct control or stability.
- SERIAL PORTS - On all models: Reading of net, gross, tare weight; Zeroing; Semi automatic and presettable tare; Scale change; Setting of output activation thresholds; Reading/Writing alibi memory. DGT100BC and DGT100AN models: Reading of microvolts or ADC converter for all channels; Message display; Printing; PMU setting in piece counting; Simulation of key pressure; MODBUS serial protocol.
- 16-bit ANALOGUE OUTPUT on DGT60AN - Value proportional to net weight or gross weight, either in positive (in loading) or in negative (in unloading).

DGT60R REPEATER

- Version with dedicated program for using the indicator as universal weight repeater or multi-scale (MASTER) in combination with DFW/DGT/MCW.

OPERATING MODES:

- Multi-scale repeater (MASTER): mode for repeating up to 32 independent scales, with option to manage their functions, or viewing and printing the sum of the weights of all scales.
- UNIVERSAL weight repeater: mode for repeating the weight of any scale, via configuration of input string.


Technical features

RS485 serial port	● x1
RS232 serial port	● x1
Serial connection cable	○
USB connection for quick programming from PC with DINITOOLS	-
Alibi memory	●
Wireless Personal Area Network (WPAN)	-
2.4 GHz radio-frequency module	○
Electronic outputs	2
Digital inputs	2
Analogue output 0...5 Vdc, 0...10 Vdc, 0...20 mA, 4...20 mA	4-20mA, 0-5 Vdc or 0-10 Vdc
Wireless Personal Area Network (WPAN) interface	-
Dimensions (mm) (LxHxW)	410 x 165 x 67 mm
Display	Red 60-mm LEDs
Keypad	5 keys, mechanical, waterproof
Case	Stainless steel
Power supply	110-240 Vac (internal power supply unit)
Working temperature: Indoor use / CE-M / Humidity	-
IP rating	IP68

Approvals

- CE-M EN 45501
- OIML R76
- OIML R61 - MID
- OIML R51
- Australian legal for trade certificate of approval (NMI S788)

Technical drawing (mm)

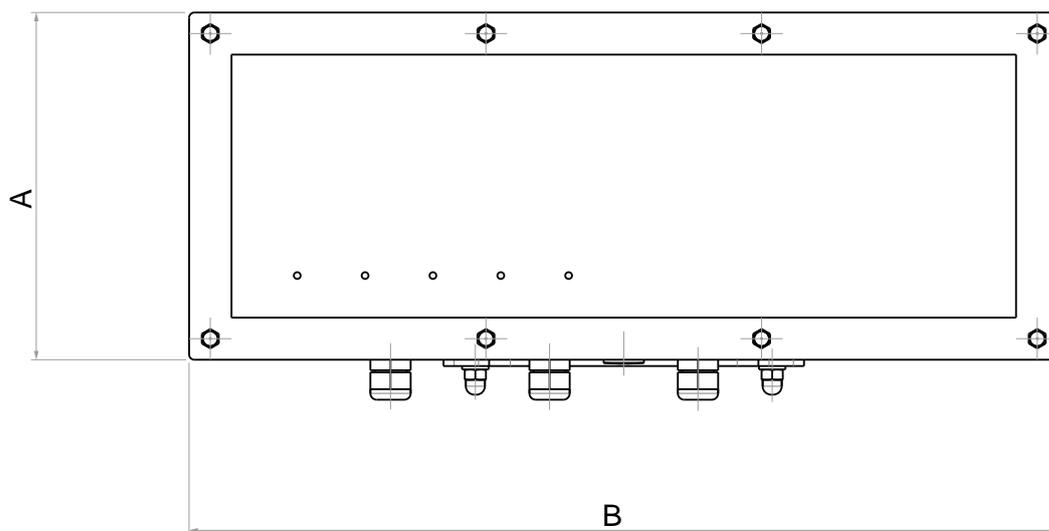

Dimensions

A	165 mm	B	410 mm
----------	--------	----------	--------

DGT603GD

LARGE RED LED MATRIX DISPLAY

Weight indicator/repeater in IP68 stainless steel, compact and sturdy, designed for areas at risk of explosion. For long-distance weight viewing, from over 25 m and from any angle, thanks to its large, red LED display with adjustable brightness.



Version codes

	DESCRIPTION	CODE	
	ATEX 3GD weight indicator with 60-mm LED display. Housing in IP68 stainless steel, 5-key keypad. Protection rating: ATEX II 3G Ex nR IIC T6 Gc X and ATEX II 3D Ex tc IIIC T85 °C Dc IP68 X. Supplied with printed safety instructions and ATEX EU Declaration of Conformity (EN, DE, FR, ES and IT).	DGT60BC3GD-1	
	ATEX 3GD weight indicator with 60-mm LED display and analogue output. Housing in IP68 stainless steel, 5-key keypad. Protection rating: ATEX II 3G Ex nR IIC T6 Gc X and ATEX II 3D Ex tc IIIC T85 °C Dc IP68 X. Supplied with printed safety instructions and ATEX EU Declaration of Conformity (EN, DE, FR, ES and IT).	DGT60AN3GD-1	
	ATEX 3GD weight indicator with 60-mm LED display and Profibus. Housing in IP68 stainless steel, 5-key keypad. Protection rating: ATEX II 3G Ex nR IIC T6 Gc X and ATEX II 3D Ex tc IIIC T85 °C Dc IP68 X. Supplied with printed safety instructions and ATEX EU Declaration of Conformity (EN, DE, FR, ES and IT).	DGT60PB3GD-2	
	ATEX 3GD weight repeater with 60-mm LED display. Housing in IP68 stainless steel, 5-key keypad. Protection rating: ATEX II 3G Ex nR IIC T6 Gc X and ATEX II 3D Ex tc IIIC T85 °C Dc IP68 X. Supplied with printed safety instructions and ATEX EU Declaration of Conformity (EN, DE, FR, ES and IT).	DGT60R3GD-2	

Why choose

- Waterproof 5-key functional keypad.
- With fixing bracket for wall-mount.
- Up to 8 signal linearisation points with DINITOOLS.
- Available in scale or weight repeater version.
- Manages up to 4 cells with digital equalisation, or up to 4 independent weighing systems.
- With valve for regulating humidity and pressure inside indicator as standard.
- CE-M certifiable (OIML R-76 / EN 45501).

Main features

I/O SECTION:

- RS232 bidirectional port for connection to printer, PC, or other external units.
- RS485 bidirectional port for connection to PC, PLC, etc.
- PROFIBUS bidirectional port (Model DGT60PB3GD).
- 2 MOSFET outputs, 150 mA 48 Vac / 150 mA 60 Vdc (NO), with configurable functions.
- 2 inputs (optocouplers) 12÷24 Vdc, 5 mA min - 20 mA max, with configurable functions.
- 16-bit analogue output (Model DGT60AN3GD) optionally 4-20 mA, 0-5Vdc or 0-10 Vdc; maximum applicable load in current: 300 Ohm, minimum applicable resistance in voltage: 1 kohm.

DGT60BC3GD / DGT60AN3GD / DGT60PB3GD FUNCTIONS:

- KEYPAD - Zero; Semi-automatic and presettable tare; Print and/or Send Data; Power-on/Stand-by.
- SELECTABLE - High-resolution display x 10; Net/gross or conversion lb/kg; Weight totalisation; Formulation; Approved weight transmission to PC/PLC (with ALMEM alibi memory option); Piece-counting; Input/Output; Hold and Peak.
- EXTERNAL INPUTS - Key pressure simulation, keypad disabling.
- MOSFET OUTPUTS - Setpoints on weight, either positive (in loading) or negative (in unloading), or on pieces (counting mode), with programmable on/off thresholds, direct control or stability.
- SERIAL PORTS - On all models: Reading of net, gross, tare weight; Zero; Semi-automatic and presettable tare; Scale change; Setting of output activation thresholds; Reading/Writing alibi memory. DGT60BC3GD and DGT60AN3GD models: Reading of microvolts or ADC converter for all channels; Message display; Printing; PMU setting in piece counting; Simulation of key pressure; MODBUS serial protocol.
- 16-bit ANALOGUE OUTPUT on DGT60AN3GD - Value proportional to net weight or gross weight, either in positive (loading) or in negative (unloading).

DGT60R3GD REPEATER

- Version with dedicated program for using the indicator as universal weight repeater or multi-scale (MASTER) in combination with DFW/DGT/MCW.


OPERATING MODES:

- Multi-scale repeater (MASTER): mode for repeating up to 32 independent scales, with option to manage their functions, or viewing and printing the sum of the weights of all scales.
- UNIVERSAL weight repeater: mode for repeating the weight of any scale, via configuration of input string.

Technical features

RS485 serial port	● x1
RS232 serial port	● x1
Serial connection cable	○
USB connection for quick programming from PC with DINITOOLS	-
Alibi memory	●
Wireless Personal Area Network (WPAN)	-
2.4 GHz radio-frequency module	○
Electronic outputs	2
Digital inputs	2
Analogue output 0...5 Vdc, 0...10 Vdc, 0...20 mA, 4...20 mA	4-20mA, 0-5Vdc or 0-10Vdc
Wireless Personal Area Network (WPAN) interface	-
Dimensions (mm) (LxHxW)	410 x 165 x 67 mm
Display	Red 60-mm LEDs
Keypad	5 keys, mechanical, waterproof
Case	Stainless steel
Power supply	110-240 Vac (internal power supply unit)
Working temperature: Indoor use / CE-M / Humidity	-
IP rating	IP68

Technical drawing (mm)

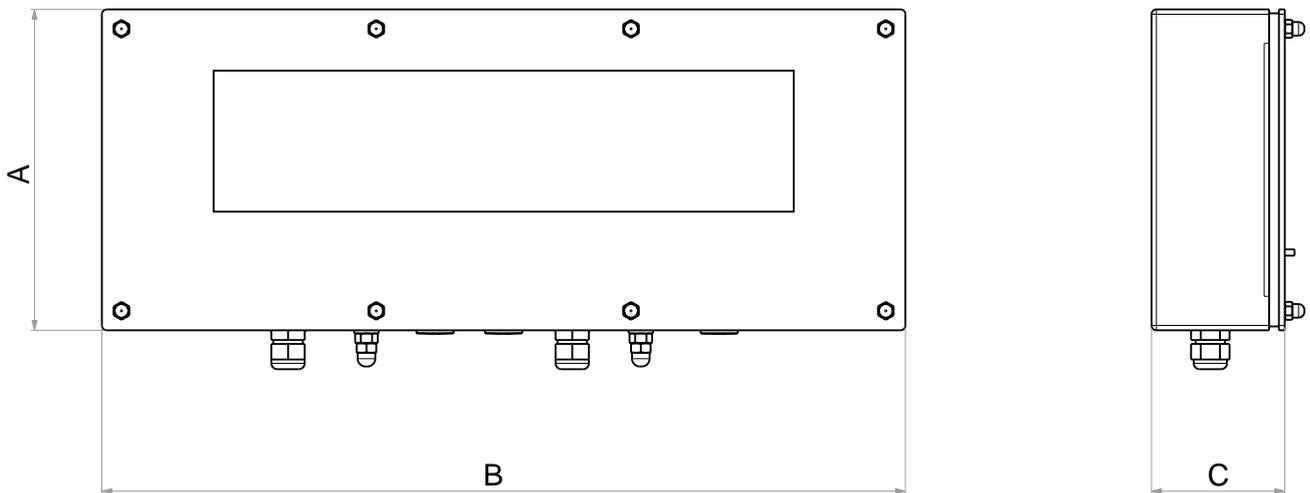

Dimensions			
A	165 mm	C	68 mm
B	410 mm		

DFWPM

LARGE BACKLIT LCD DISPLAY

Remote control and weight repeater in 2.4 GHz frequency to be combined with DFW series weight indicators, or MCW series dynamometers. Thanks to the DFWPM weight repeater, it is possible to remotely manage the main functions of the associated weight indicator or dynamometer, such as the storage and transmission of weighs to the PC.



Version codes

	DESCRIPTION	CODE	
	Wireless, portable weight repeater with container in ABS, 5-key keypad, and backlit LCD display. Integrated 2.4 GHz radio-frequency module.	DFWPM2G4	
	Portable radio-frequency weight repeater, with container in ABS, 5-key keypad, backlit LCD display, mini USB port, and memory for storing weighing data as standard.	DFWPM2G4-USB	

Why choose

- Case in ABS with IP65 protection rating.
- Compact and lightweight, easy to carry and wash.
- Large-digit, backlit LCD display for clear view of weight.
- Fitted as standard with long-life rechargeable battery.
- Memory for storing weighing data.

Main features

FUNCTIONS:

- Viewing weight, all messages from selected scale/dynamometer, and all metrological/functional icons from a distance.
- Remote management of functions of displayed scale: zero, tare, print, operating mode on/off and power-off.

ADDITIONAL FUNCTIONS FOR MODEL DFWPM2G4-USB:

- Save 500 weighings for internal use, carried out on one or more scales/dynamometers (weight of individual scale or sum).
- Connection to PC via USB port for reading list of weights via Weigh Console program, or via dedicated serial communication protocol.
- Saving 250 weighings for legal-for-trade use, carried out on a scale/dynamometer fitted with alibi memory.


SERIAL PORTS:

- Integrated 2.4 GHz modem radio, with 39 different frequency channels, easily programmable from PC, for communication with indicator, scale and dynamometers.
- USB port (as standard for model DFWPM2G4-USB) for quick connection to PC.
- Infrared receiver for remote control operation.
- 16-bit analogue output (Model DGT60AN3GD) optionally 4-20 mA, 0-5Vdc or 0-10 Vdc; maximum applicable load in current: 300 Ohm, minimum applicable resistance in voltage: 1 kohm.

Technical features

RS485 serial port	-
RS232 serial port	-
Serial connection cable	-
USB connection for quick programming from PC with DINITOOLS	-
Alibi memory	-
Wireless Personal Area Network (WPAN)	-
2.4 GHz radio-frequency module	•
Electronic outputs	-
Digital inputs	-
Analogue output (0...5 Vdc, 0...10 Vdc, 0...20 mA, 4...20 mA)	-
Wireless Personal Area Network (WPAN) interface	-
Dimensions (mm) (LxHxW)	173 x 98 x 54 mm
Display	25-mm backlit LCD
Keypad	5 keys, mechanical, waterproof
Case	ABS
Power supply	Rechargeable battery
Working temperature: Indoor use / CE-M / Humidity	-
IP rating	IP65

Technical drawing (mm)

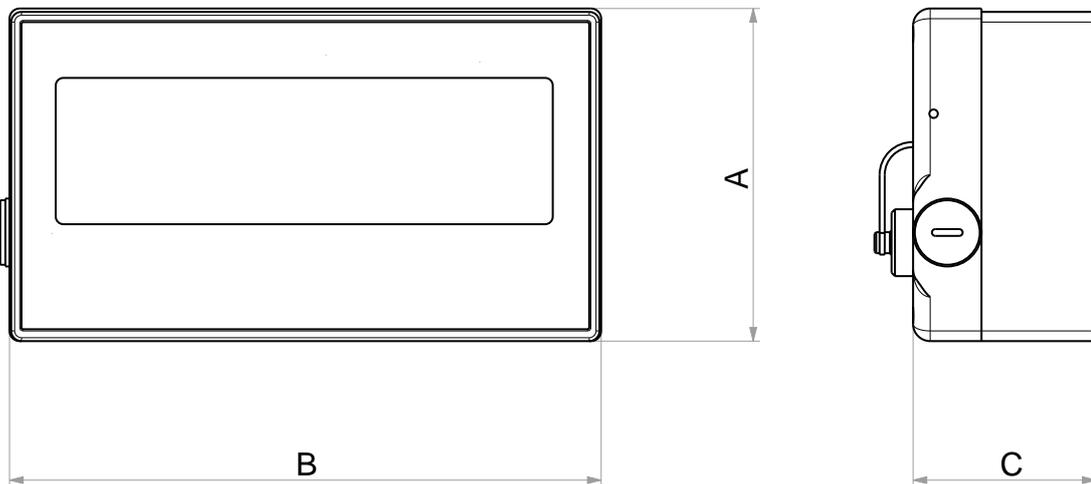

Dimensions			
A	98 mm	C	54 mm
B	174 mm		

LIST OF MAIN
OPTIONS AND ACCESSORIES
REPEATERS

Main options and accessories

		GLR100	GLR100I	DGT100	DGT60	DGT603GD	DFWPM	Code	
	Version with AU battery charger.							• AUS-V4	
	Version with UK battery charger.							• UK-V4	
	Version with US battery charger.							• US-V4	
	Protection circuit for 485 port, with case for installation on DIN rail. Protection according to IEC 1000-4-5/D (IEC 801-5/D).			•	•			RS485PDIN	
	Kit of 10 metal expanders PG9 to PG11, IP68 (max. cable ø 12 mm)			•	•			PG9PG11C	
	Kit of 10 metal expanders PG9 to PG13, IP68 (max. cable ø 12 mm)			•	•			PG9PG13C	
	Installation of the ZBA1S / PFB485EX Zener barrier inside the indicator case.					•	•	ZBINST	
	Weight indicator, for bench/panel, with 2 IN and 2 OUT. Housing in stainless steel, 5-key keypad, LED display, and standard weighing program. With external 110-230 Vac - 12 Vdc power supply unit and IP68 connector.	•						DGT20I-1	
	Weight indicator, for bench/panel, with 2 IN and 2 OUT. Housing in stainless steel, 5-key keypad, LED display, and standard weighing program. With internal 110/220 Vac power supply unit.		•					DGT20IPW	
	Pole-mount support bracket, adjustable. In painted steel.	•						GLR100P	
	Wall-mount support bracket, adjustable and tiltable. In painted steel.	•						GLR100S	
	ETHCBEX cable with cable gland and connectors. Length: 10 m.					•		ETHCBEX10M	
	Indicator with AF01 program and external power supply unit. Does not include internal battery, RJ45 port, cable glands and plugs. No factory-installed options or calibration and approval services.	•	•					3590E	
	Protective barrier for RS485, for direct connection in safe area. Max cable length: 200 m.			•	•	•		PFB485EX	
	Intrinsically safe Zener barrier with three channels. Specific for connection to load cells, for mounting on DIN rail in safe area or explosion-proof enclosure.			•	•	•		ZBA1S	
	8-inch touchscreen indicator with IP68 stainless steel housing. Version with adjustable tilt, bracket for installation on bench or wall. Internal Ethernet port as standard. Standard AF01 program.	•	•					3590EGT8-1	
	Touchscreen indicator with IP68 stainless steel housing. Version with adjustable tilt, bracket for installation on bench or wall. Standard AF01 program.	•	•					3590EGTT	

3590 SERIES

WEIGHT INDICATORS

DFW SERIES

6116 SERIES

INDUSTRIAL PCS

WEIGHT REPEATERS

OTHER INSTRUMENTS

WEIGHT TRANSMITTERS

PC SOFTWARE

Junction boxes / Junction boards - Cell cables

		GLR100	GLR1001	DGT100	DGT60	DGT603GD	DFWPM		
	Description							Code	
	LCCBC cable + 10-m extension.			•	•			LCCB10C	
	LCCBC cable + 5-m extension.			•	•			LCCB5C	
	Shielded cable 6x0.25 mm ² (suitable for Ex zones). Inner sheath in PVC. Shielding with tinned copper braid. External sheath in PVC, diameter 5.8 mm.			•	•	•		LCCB	
	Cable for connection of platform to indicator, l=50 cm. Female connector, solder type.			•	•			LCCBC	

Approval

		GLR100	GLR1001	DGT100	DGT60	DGT603GD	DFWPM		
	Description							Code	
	Approved for Australia, for individual platform/scale.			•	•			ECEM-AU	
	Welmec plates and module for a scale. NET PRICE. Service available in combination with Dini Argeo indicator.			•	•	•		KCEM	

Columns, support brackets, shields

		GLR100	GLR1001	DGT100	DGT60	DGT603GD	DFWPM		
	Description							Code	
	Kit with 2 stainless steel brackets for ceiling- or wall-mount.		•	•				DGT100S	
	AISI 304 stainless steel bracket, adjustable tilt. For mounting weight indicator on wall.			•	•	•		STFR-1	
	Solidly connected stainless steel shield. Protects against sun and rain and improves indicator visibility.			•				DGT100V	
	Solidly connected stainless steel shield. Protects against sun and rain and improves indicator visibility.	•						GLR100IV	

Communication interfaces

📷	Description	GLR100	GLR100I	DGT100	DGT60	DGT603GD	DFWPM	Code	
	RS485 bidirectional ports for DFW series.	•	•					DF485	
	Internal RS485 interface (assembly and cable gland not included).	•	•					RS485C	
	Internal opto-isolated RS485 interface (assembly and cable gland not included).	•	•					RS485OPTO	
	Alibi memory (fiscal memory, max. 120,000 weighings) for approved weight transmission to PC/PLC or storage on MMC/USB. Integrated calendar/clock for printing the date/time with PCB, terminals, plastic box and labels with UL marking.			•	•	•		ALMEM-1	
	External 2.4 GHz radio module for PC, with USB cable l=1 m. Power supply direct from USB port. Maximum operating distance in suitable environmental and installation conditions: 45 m indoor, 140 m outdoor. 39 configurable channels.			•	•			OBRF2G4-USB	
	2.4 GHz radio-frequency module with TTL port. Maximum operating distance in suitable environmental and installation conditions: 45 m indoor, 140 m outdoor.		•					RF2G4-TTL	
	2.4 GHz radio-frequency module for ATEX zones 2 & 22. Protection case in IP66 ABS, armoured 3-m cable, and power supply from indicator.					•		OBRF2G4-3GD	
	External 2.4 GHz radio module, with cable l=3 m. Case in IP65 ABS, powered from indicator. Maximum distance in suitable environmental and installation conditions: 45 m indoor, 140 m outdoor. 39 configurable channels.	•		•	•			OBRF2G4	
	RS232 / RS485 / Ethernet converter. Modbus RTU / Modbus TCP/IP (if compatible). Can be connected to Dini Argeo weight indicators via serial port. Container in ABS for DIN rail with PCB, terminals, plastic box and labels with UL marking (if included).			•	•			SETHDIN-1	
	Internal WiFi interface. For wireless connection (via access point) to the company computer system.			•	•			WIFITPWLK-2	
	Internal Ethernet interface. 10-100 Mbps speed, TCP, UDP, IP, ARP, ICMP protocols, Ethernet Mac.			•	•	•		ETHD	

Calendar Clock / Date & Time

📷	Description	GLR100	GLR100I	DGT100	DGT60	DGT603GD	DFWPM	Code	
	Calendar clock for printing/displaying the date and time with PCB, terminals, plastic box and labels with UL marking (if included).			•	•	•		DFCLK	

Connection cables

		GLR100	GLR1001	DGT100	DGT60	DGT603GD	DFWPM	Code	
	 Description								
	RS232 cable l=1.5 m with PG9 and wires for terminal block.			•	•			RSCBPC	
	4-core shielded twisted pair cable (2x2x0.34 mm ²), for RS485 communication or analogue output. Inner sheath in polyolefin. Shielding with tinned copper braid. External sheath in PVC, diameter 7 mm.		•	•	•	•		RSCBTW	
	Ethernet cable, l=1.5 m. With cable gland, for connection between indicator and PC network.			•	•			ETHCBRJ	
	USB PC/RS232 converter cable, l=1.5 m. USB/RJ11 connector.			•				RSCBUSB-1	
	USB PC/RS232 converter cable, l=1.5 m, with PG9. USB/RJ11 connector. For connection to weight indicators with IP65, IP68 and IP69K rating.					•		RSCBUSBPG	
	Multi-core cable (4x2xAWG24) suitable for Ethernet connections in Ex zones (connectors and cable gland only installed with S6 service). First shielding: aluminium/polyester foil, second shielding: tinned copper braid (coverage ≥ 85% - EMC 89/336). External sheath in PVC, diameter 6.3 mm.					•		ETHCBEX	
	RS232 cable l=10 m. For connecting indicator to weight repeater, without connectors.			•	•			RSCB10	
	RS232 cable l=5 m. For connecting indicator to weight repeater, without connectors.			•	•			RSCB5	

Main connectable weight indicators

		GLR100	GLR1001	DGT100	DGT60	DGT603GD	DFWPM	Code	
 Description									
	17-key indicator. Housing in IP65 ABS. Backlit LCD display.	•	•					DFWKXP	

Related transmitters/weight indicators

		GLR100	GLR1001	DGT100	DGT60	DGT603GD	DFWPM	Code	
 Description									
	Weight transmitter for DIN rail, with 2 IN and 2 OUT. 5-key keypad, LED display. Multifunctional weighing program.		•					DGT1S	

Options for ATEX installations

Image	Description	GLR100	GLR100I	DGT100	DGT60	DGT603GD	DFWPM	Code	
	ATEX equalised junction box in IP67 ABS, for max. 4 cells. 4 + 1 cable gland. Protection rating: ATEX II 2G Ex ib IIC T6 Gb for gas, ATEX II 2D Ex tb IIIC T115 °C Db IP65 for dust.			•				JB4QA	
	ATEX equalised junction box, IP66 stainless steel, up to 4 cells. 4 + 1 cable gland. Marking: ATEX II 2G Ex ib IIC T6 Gb for gas, ATEX II 2D Ex tb IIIC T115 °C Db IP65 for dust.			•				JB4QAI	
	ATEX Zener 3 barrier kit for load cells, in ABS box. For max. 4 x 350 ohm cells, for intrinsically safe weighing systems in hazardous area.			•	•			KMB4-1	
	ATEX box kit in ABS, with ZBA1S barrier for load cells. For intrinsically safe weighing systems in hazardous area. Dimensions: 179x359x166.5 mm.			•	•			KZBA-1	
	Blue shielded cable 6x0.22 mm ² , only for EX i assemblies (2GD). Inner sheath in PVC. Shielding with tinned copper braid. External sheath in polyurethane, diameter 5.8 mm. Working temperature: -40 / +80 °C. Minimum bend radius >= 7 x O.D. €/m			•				EXCB6	
	ATEX Declaration for equipment for system with Dini Argeo Zener barriers. Type: Ex II 2G IIC T6 Gb X and Ex II 2D IIIC T125 °C Db X, with respective label for assembly, for weight indicator connected to Dini Argeo Zener barriers, connected to mechanical structure with ATEX load cells (each cell must be certified with CCATEX). Supplied with printed document describing assembly and ATEX Declaration of Conformity for equipment (EN and IT).			•	•			DCATEXMB4	
	ATEX Declaration of Conformity for equipment. Type: Ex II 3G IIC T6 Gc X and Ex II 3D IIIC T115 °C Dc X, with respective label for assembly, for Dini Argeo ATEX-certified or NON-certified indicator (in the latter case, install in safe zone), connected to mechanical structure with ATEX load cells (each cell must be certified with CCATEX or CCATEX3GD). Supplied with printed document describing assembly and ATEX Declaration of Conformity for equipment (EN, DE, FR, ES and IT).					•		DCATEX3GD	

Remote controls

Image	Description	GLR100	GLR100I	DGT100	DGT60	DGT603GD	DFWPM	Code	
	Radio-frequency remote control and receiver. Specifically for DGT60/DGT100.			•	•			TLRD	

PG cable glands

Image	Description	GLR100	GLR100I	DGT100	DGT60	DGT603GD	DFWPM	Code	
	Set of 10 PG9 metal cable glands for weight indicators. With ring nuts and seals.			•	•			PG9M	
	Set of 10 PG9 metal cable glands for ATEX indicators. With ring nuts and seals. Cable diameter: 4 to 8 mm.					•		PG9EX	

Optional power supply cables


	Description	GLR100	GLR1001	DGT100	DGT60	DGT603GD	DFWPM	Code	
	Version with AU power cable.		•	•	•			PWCORDAUS	
	Version with SEV1011 power cable (CH plug).		•	•	•			PWCORDCH	
	Version with BS1363 power cable (UK plug).		•	•	•			PWCORDUK	
	Version with US type-B power cable (Japan, North and Central America).		•	•	•			PWCORDUS	

Other options

	Description	GLR100	GLR1001	DGT100	DGT60	DGT603GD	DFWPM	Code	
	Technical support by telephone upon request.				•	•	•	TECSUP	
	Printed technical manual (free download from the website).			•	•			TECMAN	
	Printed user manual (downloadable for free from the website, in the "DOCUMENTS" section in the Home Page, by entering the product serial number).			•	•			UMAN	
	EU Declaration of Conformity, EU verification certificate, test certificate and metrology booklet, in printed format (free download from the website, available only for CE-M approved scales). € NET.			•	•	•		ECEMDOC	

Remote controls

	Description	GLR100	GLR1001	DGT100	DGT60	DGT603GD	DFWPM	Code	
	Armoured cable 4x0.5 mm ² (suitable for Ex zones). Inner sheath in PVC. Armour: galvanised steel wire braid. External sheath in PVC, diameter 7.3 mm.					•		EXACB4	

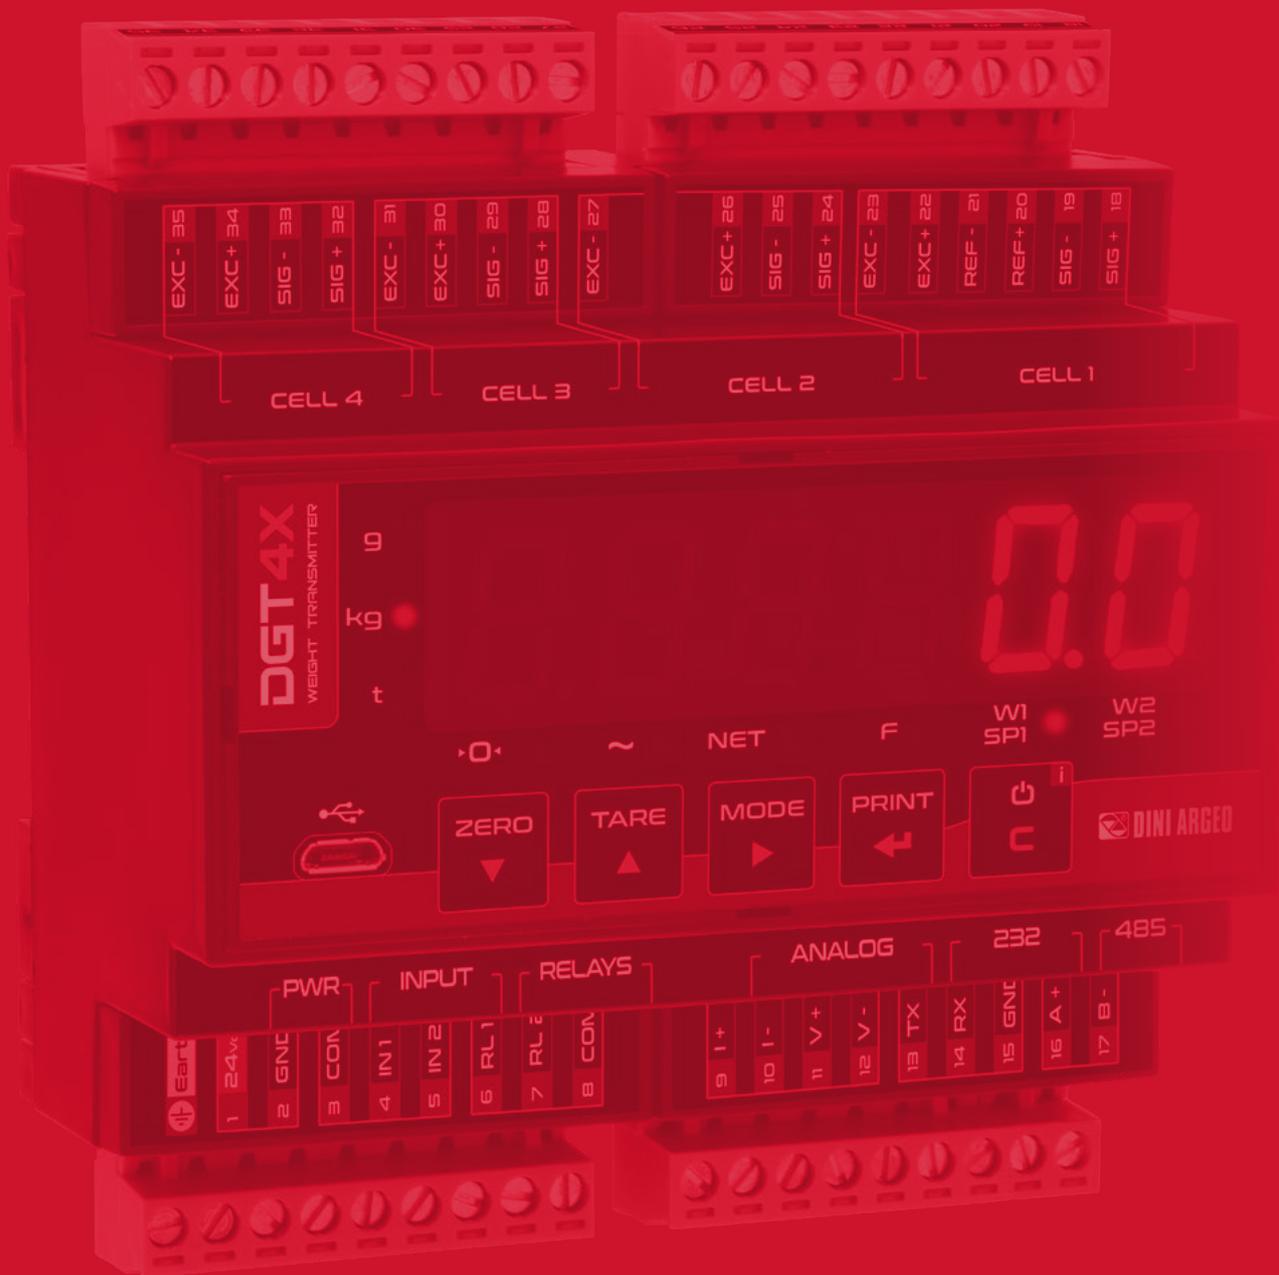

OTHER INSTRUMENTS

WEIGHT TRANSMITTERS

For over 20 years, Dini Argeo has been designing and manufacturing weight transmitters that stand out for their reliability and reading accuracy in automated industrial weighing systems.

Our DGT series is made up of two major categories: high-speed weight transmitters, and safety and control weight transmitters.

▶ For a complete overview, see the catalog "LOAD CELLS AND WEIGHT TRANSMITTERS" at www.diniargeo.com ◀

WEIGHT TRANSMITTERS

High-speed weight transmitters for industrial processes and automation

These weight transmitters are designed for use in applications where a very high sampling rate is required to weigh with extreme precision in fractions of a second.

IDEAL FOR:

Belt weighing, dosing and micro-dosing, in-line filling and process control.

 ERROR DISCONNECTED CELL	 OIML APPROVED	 SUPER FAST UP TO 4,800 Hz	 USB PORT	 WEB SERVER	 JBOX MODE	 UP TO 4 SCALES	 XSPEED TOOL FREE DOWNLOAD
--	--	--	---	---	--	---	--



DGT1SX



DGT1SX CHECK



DGT4X



DGT4X DIGITAL

		DGT1SX	DGT1SX CHECK	DGT4X	DGT4X DIGITAL
Number of scales / channels		1	1	Up to 4	Up to 1
Conversion speed		Up to 4,800 Hz	Up to 4,800 Hz	Up to 2,600 Hz	Up to 1,600 Hz
Web server		●	●	●	●
Integrated fieldbus		●	●	●	●
Modbus RTU		●	●	●	●
RS485		●	●	●	●
RS232		-	-	●	●
USB		●	●	●	●
Digital I/O		●	●	●	●
Analogue output		●	●	●	●
Casing		ABS	ABS	ABS	ABS
Electric certifications	UL Listed	Upon request	Upon request	Upon request	Upon request
Metrological certifications	OIML R61 MID	●	●	●	-
	OIML R51	●	●	●	-
	OIML R76	●	●	●	●
	EC Type Examination Certificate	●	●	●	●

LEGEND: ● As standard - Not available

For over 20 years, Dini Argeo has been designing and manufacturing weight transmitters that stand out for their reliability and reading accuracy in automated industrial weighing systems.


Our DGT series is made up of two major categories: high-speed weight transmitters and safety and control weight transmitters.

Safety and control weight transmitters

These transmitters are the most convenient and cost-effective solution for weight monitoring and control applications in industrial processes.

IDEAL FOR:

Silos, hoppers, rollers and low speed belts.

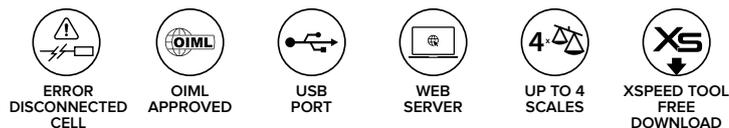

Installation type	DIN rail				Panel			Wall / Bench	
	ABS	ABS	ABS	ABS	Aluminum	ABS	ABS	Stainless steel/painted	Stainless steel
Casing	ABS	ABS	ABS	ABS	Aluminum	ABS	ABS	Stainless steel/painted	Stainless steel
Number of scales / channels	1	1	1	Up to 4	1	1	1	1	1
Conversion speed	Up to 400 Hz	Up to 400 Hz	Up to 400 Hz	Up to 400 Hz	Up to 400 Hz	Up to 400 Hz	Up to 400 Hz	Up to 400 Hz	Up to 400 Hz
Web server	●	-	-	●	-	-	-	●	-
Integrated fieldbus	●	-	-	●	-	●	●	●	●
Modbus RTU	●	●	●	●	●	●	●	●	●
RS485	●	●	●	●	●	●	●	●	●
RS232	●	●	●	●	-	●	●	●	●
Digital I/O	●	●	●	●	●	●	●	●	●
Analogue output	●	●	●	●	●	●	●	●	●
Electric certifications	UL Listed	Upon request	Upon request	-	Upon request	-	-	-	-
	OIML R61 MID	●	●	●	●	●	●	●	●
Metrological certifications	OIML R51	●	●	●	●	●	●	●	●
	OIML R76	●	●	●	●	●	●	●	●
	EC Type Examination Certificate	●	●	●	●	●	●	●	●

LEGEND: ● As standard - Not available



PC SOFTWARE


MYRIAS®

INTEGRATED SOFTWARE SOLUTION

Myrias is a corporate software designed to help companies in all industrial sectors improve operations, manage resources and steer growth. Myrias captures, monitors and reports weight data, enabling companies to leverage scale data information to make more informed and strategic decisions.

Myrias software can help reduce costs, maintain product quality, provide material traceability, and ensure regulatory compliance. Use Myrias to easily launch and stop work, immediately access reports in real time and review KPI data. Reports can be generated in real time locally or remotely, so data can be accessed from multiple locations.

Since Myrias is a modular software platform, each facility can customise its own software system to suit their specific processes. Facility managers can use modules such as batch formulation, checkweighing, offline sampling and others to create the ideal system for their operations.

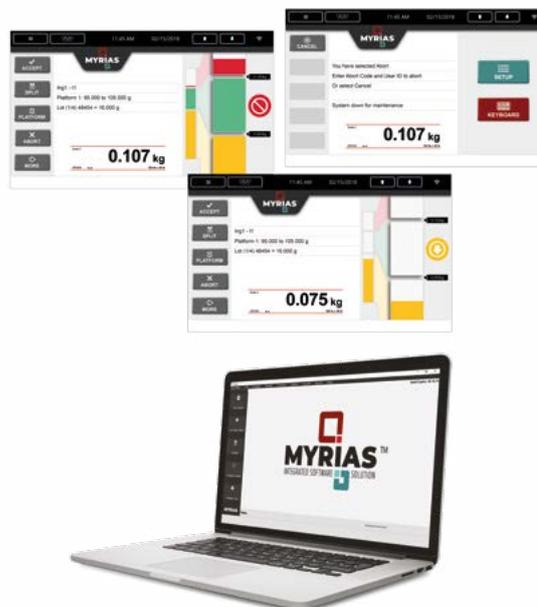

Version codes

DESCRIPTION	CODE	
Myrias Core module. Up to 10 devices.	MYR-COR-10	
Myrias Core module. Up to 20 devices.	MYR-COR-20	
Myrias Core module. Up to 40 devices.	MYR-COR-40	
Myrias Enterprise Core Module. Up to 120 devices.	MYR-COR-120	
Myrias Enterprise SQL Core module. SQL Core for large and complex systems.	MYR-COR-SQL	

Remote technical assistance

DESCRIPTION	CODE	
Annual Maintenance Agreement T1. Remote Support And License Per Station.	SUPP-T1	
Annual Maintenance Agreement T2. Remote Support And License Per Station.	SUPP-T2	
Annual Maintenance Agreement T3. Remote Support And License Per Station.	SUPP-T3	
Annual Maintenance Agreement T4. Remote Support And License Per Station.	SUPP-T4	
Annual Maintenance Agreement T5; bespoke, please enquire.	SUPP-T5	
Hourly Maintenance Charge. Hourly charge if no annual maintenance plan is in place.	SUPP-HMC	

Available modules - T1

DESCRIPTION	CODE	
Manual Checkweighing Single. Single ingredients in standard positive weighing. Per single unit/device.	PRD-MCW	
Scale Manager. Multiple scale visibility with management tools. Per single unit/device.	PRD-SCM	
Counting. Parts counting using average piece weight on an existing scale. Per single unit/device.	PRD-CNT	
Data Manager. Records weight values from existing scale equipment. Per single unit/device.	MYR-DM	
Waste at In Line Scale. Waste and Shrink Calculations. Per single unit/device.	PRD-ILW	

Available modules - T2

DESCRIPTION	CODE	
Floor Pallet Weigh. Pallet Weighing. Per single unit/device.	MYR-PW	
Fork Lift Truck Basic. Per single unit/device.	MYR-FLT	
Dimensioning Module. Package Dimensions and Sales Order Processing.	MYR-DIM	
Manual Checkweighing Ready Meal. Multiple ingredient products in positive and takeaway modes. Per single unit/device.	PRD-RM	
Waste. Monitoring and recording scrap, waste, or shrink with traceability. Per single unit/device.	MYR-WST	
Traceability Station or Point. Full forward and back traceability through process. Per single unit/device.	MYR-TRA	
Axle Weigh / Accumulation. Per single unit/device.	TRA-WWS	
Bag Weighing Recording. Data acquisition of product weight values from an existing bagging scale. Per single unit/device.	MYR-BWR	
Manual Weigh Label. Per single unit/device.	MYR-WLA	
Transport Kiosk Module Per single unit/device.	TRA-KSK	
Products grading. Per single unit/device.	PRD-GRD	
Belt Weighing. Belt Scale. Per single unit/device.	MYR-BELT	
Dynamic Checkweigher. Recording and reporting of each weight. Per single unit/device.	PRD-DCW	

Available modules - T3

DESCRIPTION	CODE	
Offline Sampling. Per single unit/device.	PRD-OLS	
Offline Sampling for eWeight Per single unit/device.	PRD-EW	
Quantity Average & Minimum Weight. Per single unit/device.	PRD-AMW	
SPC Weight Recording. Per single unit/device.	PRD-SPC	
Weight Recording by Band. Per single unit/device.	PRD-WBB	
Quality Control. Per single unit/device.	MYR-QC	
Yield Management Per single unit/device.	PRD-YLD	
Truck Scale Management. Advanced Weighbridge Module. Per single unit/device.	TRA-WBD	
Advanced Axle Weigh / Accumulation. Per single unit/device.	TRA-AXL	
Recipe Batch Formulation. Up to 3 weighing inputs for manual control of recipe mix creation. Per single unit/device.	PRD-RCP	
Batch Yield System Module. Track yield per batch from 2 incoming weigh stations to 3 outgoing weigh stations. Per single unit/device.	PRD-BYS	
Stock Control. Inventory Management. Per single unit/device.	MYR-STK	
Goods In. Incoming Inventory Tracking. Per single unit/device.	MYR-GI	
Counting Pro. Counting Scale. Per single unit/device.	MYR-CP	
Manual Weigh Price Label. Per single unit/device.	PRD-WPL	
Outer case marker labeling system. Per single unit/device.	PRD-OCM	
Fork Lift Truck Pro. Per single unit/device.	MYR-FLTP	
Warehouse Management System. Inventory Management. Per single unit/device.	MYR-WMS	

3590 SERIES

WEIGHT INDICATORS

DFW SERIES

INDUSTRIAL PCS
6116 SERIES

WEIGHT REPEATERS

OTHER INSTRUMENTS

WEIGHT TRANSMITTERS

PC SOFTWARE

Other options

DESCRIPTION	CODE	
Bespoke automated file export. CSV or similar format for further processing in a 3rd party software.	SDI-EXP3	
File Import from 3rd Party. Import from CSV or similar from a 3rd party software.	SDI-IMP3	
SQL Import from 3rd Party. Import from SQL table, or similar from a 3rd party software.	SDI-IMPSQL3	
SQL Export for 3rd Party. Export to SQL table, or similar for further processing in a 3rd party software.	SDI-EXPSQL3	
Label Designer. Designs labels for Zebra and Honeywell Intermec printers.	SDI-LD	
Network station license. Remote management, reporting and other functions (management tools).	MYR-NSL	
ERP Integration. Integration of all table data to be imported and exported to 3rd party ERP system.	SDI-ERP	

Services

DESCRIPTION	CODE	
Protocol Connection; connecting additional third party hardware	SER-PROT	
Custom programming service. Programming & Customization.	SER-PROG	
On-Site Installation. Installation Services (Add for Travel & Related Expenses).	SER-INS	
On-Site Training. Training services (Add for Travel & Related Expenses).	SER-TRA	
Factory Acceptance Test. Pre-Installation testing and configuration.	SER-FAT	
Description Document (T1 & T2). Process Definition to build solution.	SER-DD	
Formal Design Specification. Detailed specification document describing process and features of software.	SER-FDS	
Remote Installation. Remote Installation via Team Viewer on Customers PCs, Servers and Terminals.	SER-REMI	
Remote Training. Remote Training via Team Viewer on Customers PCs, Servers and Terminals.	SER-REMT	

APPLICATION MODULES

Myrias software features more than 150 modules covering virtually every business need.

This extensive modular system can be adapted and expanded to meet future corporate needs, from production to back-office functions. The standard modules are listed below.

Dynamic weight control



Recording of all packages from the checkweigher with real-time graphs. Immediate reporting of low weights and costly rejects. Comprehensive records help analyse package weights and diagnose filling defects.

- Centrally manage the product database from a single PC and send settings to each checkweigher
- Automatic product change on checkweigher from central job control
- Calculate fill adjustments to maintain control target (can be displayed by operator or connected to suitable equipment for automatic yield control)
- Advanced statistical and AI control options available for complex products
- Option to record actions of the integrated metal detector

Batch recipe formulation



Accurate weighing of ingredients in batches, mixes and doughs. Get consistent quality, reduced waste, better cost control and complete traceability of weighing and measuring ingredients for set recipes.

- Shows recipe method
- Ensures consistent quality
- Reduces waste
- Displays HACCP messages and production information
- Full traceability of weighing and ingredient measurement
- Automatic calculation of ingredient weights for non-standard batch sizes

Offline sampling



Precise control of package filling enables you to meet legal requirements and limit profit loss. Powerful diagnostics help characterise fill performance and minimise fill variability problems. Maintains legally accepted records as proof of due diligence.

- Displays operator warnings of individual and collective pack fill violations, with calculated adjustments to maintain control target
- Includes a library of statistical control strategies
- Stores secure records for average weight, minimum weight and other legislation, as well as for statistical process and quality control
- Density conversion for liquid fillings
- Quarantine module available to record defect management

Forklifts



Simplify material handling operations by integrating forklift scales to move and weigh pallets in a single step. Simple messages guide operators through each pallet operation.

- Operator and product traceability
- Forklift performance statistics
- Real-time data sent to FTP
- Reports are available in CSV or TXT files for data transfer

Pallet weighing



Shipping and warehouse inventory systems benefit greatly from pallet weighing. Real-time data can be integrated to display live product quantities and shipment status.

- Accurate pallet weighing and recording
- Integrates floor and forklift scales into one database
- Data analysis identifies shortages, overfills and process yields
- Pallet labelling according to composition, customer, storage and other criteria

Static weight control



Add efficiency to food production, sorting and processing applications. Each package is continuously monitored and checked to be within a predetermined range or target.

- Fill control with weighing control lights to notify operators of weight status
- Optimise limits to control weight and operator speed
- Control of multiple scales from a central database
- Support for normal and outgoing fill control
- Automatic recording of each weight by operator, product and other key data
- Works with Ethernet, Wi-Fi and serial interfaces

Waste



To optimise profits, waste must be identified, measured and reduced in all operations. Reducing waste has a direct impact on profits.

- Monitor waste by type, product and department
- Record waste transactions for regulations
- Full traceability of all transactions
- Multiple plants can be networked with peripheral and central locations for ordering, accounting and reporting
- Operator messages guide the user quickly and smoothly through each transaction

Transport



Integrates with vehicle scales to manage product inventory, carriers, suppliers, customers, order processing, shipping and invoicing. Maximises vehicle throughput by reducing the risk of data entry errors.

- Records vehicle load data and empty weight data
- Captures vehicle and trailer identifiers
- Multi-axle weighing
- Checks loading bays and inventory of contents

Traceability (additional module)



Minimises business risk in the event of quality failure by quickly identifying affected items. Easily identifies process problems related to customer complaints.


- Provides complete traceability from intake to dispatch through all stages of production, supply and distribution
- Links traceability data through comprehensive and easy-to-use reports
- Each transaction includes time, date, batch numbers and operator identity for complete accountability
- Instant forward and reverse traceability of all materials and batches

DINITOOLS

QUICK WEIGHT INDICATOR CONFIGURATION

The Dinitools PC software makes it possible to quickly configure the weight indicator and to create a registry of the installed scales.

These functions make it possible to quickly replicate the installations carried out, saving a great deal of time.

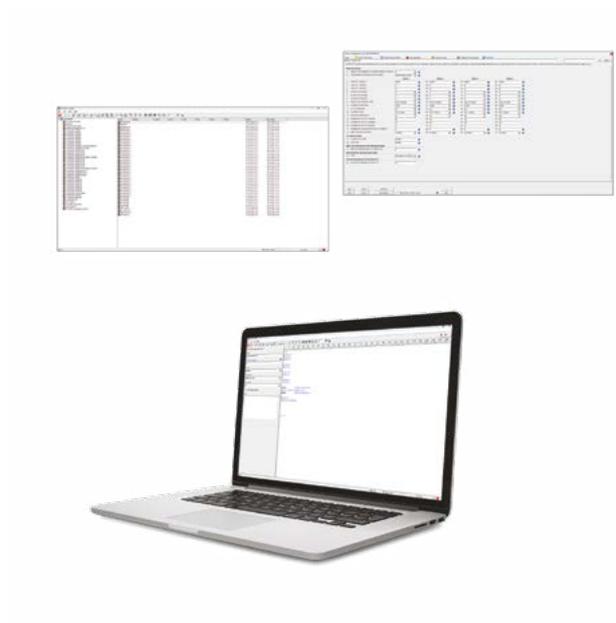

Version codes

	DESCRIPTION	CODE	
	PC software for indicator management (complete with USB and manual).	DINITOOLS	

Main functions

- Management of customer registry with saving of attachments, photos, videos, etc.
- Saving of configurations made to simplify and speed up future replicas.
- Calibration of scales with sample weights, with 8 linearisation points.
- Theoretical calibration by entering the system's characteristic data.
- Pre-calibration of the electronic board of the indicator.
- Digital equalisation.
- Filling out archives, quickly and easily.
- Printout and label layout customisation.

Compatible indicators and transmitters

- All

DINI DISPLAY TOOL

PROGRAM FOR QUICK CUSTOMISATION OF DISPLAY

DINI DISPLAY TOOL allows you to quickly customise the interface of touch screen indicators in the 3590 range, modifying buttons, numeric fields, text fields, logos and other components.



Version codes

	DESCRIPTION	CODE	
	Program for quick customisation of touchscreen display.	DDT	

Main functions

- Simple and intuitive interface
- Customisation database
- Import/Export customisations
- Image management and option to match them to items, customers, PLUs, etc.
- Logo management
- Free insertion of objects, such as:
 - Buttons
 - Touch areas
 - Images
 - Bargraphs
 - Text and numeric fields
- Matching functions to objects

Compatible indicators and transmitters

- 3590 Touch series

XSPEED TOOL

WEIGHING FILTER DIAGNOSTICS AND CONFIGURATION SOFTWARE

PC software for recording the signal coming from the load cell in real time, and to process it by applying specific filters to remove vibrations, disturbances and noise.

Indispensable for accurate and fast weighing in automated weighing systems.



XSPEED TOOL
FREE
DOWNLOAD



Main functions

- Analysis of the signal in the time and frequency domain.
- Reception of data at very high speed (up to 2600 reads per second).
- Automatic data capture based on time or weight thresholds.
- Real-time signal processing.
- Application of optional, fully configurable filters to remove vibrations, oscillations, peaks, etc., making the weight stable and the scale responsive and performing.
- Calibration of the instrument, including:
 - Calibration using sample weights, with option of linearising the system up to 8 points.
 - Theoretical calibration, with input of the data for the system to be made (load cells, dead load, etc.).
- Database of weights and configured filters.

Filters

- Coarse filter for removing signal background noise and stabilising the weight.
- Fine filter to increase read accuracy.
- Selective filter to isolate and eliminate noise with precise frequencies.

Compatible indicators and transmitters

- High-speed DGT series

WEIMONITOR

DATA SAVING AND EXPORT TO CSV

WeiMonitor is the PC program for monitoring and recording in real-time weighings made on a connected scale, storing them in an Excel or text file for future processing.



Version codes

	DESCRIPTION	CODE	
	“WeiMonitor” PC software for monitoring/recording weights made on connected scale, in real time (the price shown refers to the licence for managing one scale).	SWM	

Main functions

- Weight display, with option of semi-automatic tare management via dedicated button
- Manual recording at the push of a button on the PC or directly on the scale
- Automatic “time” recording, with programmable read frequency
- Data saving to Excel (.xls) or text (.txt) file
- Keyboard emulation, for entering weight data directly into the active Windows application, allowing the compilation of bills, documents, invoices, etc.
- Approved operation with recording of the weighing ID (alibi memory inside the indicator required)

Compatible indicators and transmitters

- All

D-LEGAL

APPROVED PROGRAM FOR SAVING WEIGHTS, DATA EXCHANGE WITH PC PROGRAMS VIA API

D-LEGAL is a program for saving type-approved weighing operations. It is a real virtual alibi memory, directly on a PC and without storage limits. With this new software, all data is saved in a type-approved file that can be exported to Excel. It is designed to simplify data exchange with external programs using a comprehensive API package.



M TYPE-APPROVED

Version codes

	M	DESCRIPTION	CODE	
	M	Type-approved software for recording weighing results to a PC (virtual alibi function) with an integrated API library for interfacing with other software.	D-LEGAL	
		Software for recording weighing results to a PC (for internal use) with an integrated API library for interfacing with other software.	D-API	
	M	Type-approved software for repeating weight to a PC.	D-REPE	

Main functions

- Type-approved software, for Legal for Trade use
- The program interface is the type-approved scale viewer that can be used for zeroing, setting the tare and saving weighing results
- Retrievable and exportable weight database in Excel format
- Virtually unlimited storage memory
- Keyboard emulation function for entering the type-approved weighing directly where it is needed, on bills, invoices, etc
- Also available in a version for internal factory use (D-API)

Type-approved software, for legal-for-trade use

Thanks to type approval for legal-for-trade use, D-LEGAL enables creating type-approved application software for Windows, leveraging the API library.

Please refer to the user manual for the registration and type-approval procedure.


Compatible indicators and transmitters

- DGT4X
- DGT1SX
- DGT1P
- DGT1SP
- DFWIECEX
- 3590 Touchscreen series (with D-API)

DBMANAGER

PC PROGRAM FOR QUICK COMPILATION OF SCALE ARCHIVES

DBMANAGER is a PC program for facilitating and speeding up filling out scale archives, with the option to import/export them in Excel format.

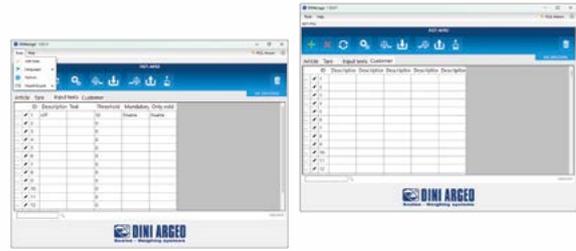

Version codes

	DESCRIPTION	CODE	
	PC program for quick compilation of archives. For 3590Exx and CPWExx instruments (the price shown refers to the licence for managing one scale).	DBM	

Main functions

- Self-identification of the connected indicator
- Configurable fields of each archive
- Receive/transmit archives
- Import/Export from Excel file

Compatible indicators and transmitters

Supported indicators:

- 3590ET / 3590ETT / 3590ETB / 3590ETKR / 3590EGT
- 3590EXP / 3590EXT
- CPWE

Supported programs:

- AF01
- AF02
- AF03
- AF04
- AF05
- AF09
- BATCH1
- BATCH

QUALITY AND CERTIFICATIONS



Dini Argeo has been active since 1846 in the production of scales and weighing systems, and since **02/04/1906 has been enrolled in the Registry of Metric Manufacturers** provided for by Royal Decree no. 226 of 12/06/1902.



Dini Argeo has obtained the **Quality Management System certification** according to UNI EN ISO 9001:2015.



Dini Argeo is an **ATEX notified body** pursuant to Directive 2014/34/EU (Annex IV). The Dini Argeo production process is therefore certified for the production and marketing of Ex-marked equipment intended for use in environments with potentially explosive atmospheres.



Dini Argeo has achieved **ATEX EX NEPSI** certification for China, for its weight indicators intended for use in environments with potentially explosive atmospheres, areas 2GD.



Dini Argeo is a certified company for the manufacture and supply of Ex-marked **IECEx certified** equipment for use in environments with potentially explosive atmospheres requiring the IECEx certified equipment scheme.



Dini Argeo manufactures instruments that conform to the defined requirements of the **International Organization of Legal Metrology (OIML)**:

- **OIML R60** approval for load cells.
- **OIML R76** approval for non-automatic weighing instruments.
- **OIML R134** approval for dynamic vehicle low speed weigh-in-motion.
- **OIML R51** (MID) approval for automatic weighing on weighing belt.
- **OIML R61** (MID) approval for weighing for gravity filling machines.



Dini Argeo manufactures non-automatic weighing instruments in accordance with Directive 2014/31/EU. The DG marking indicates that the instrument is subject to EC verification by the manufacturer according to the **EC Certificate of Approval of the Production Quality Assurance System**.



Dini Argeo is a **CIBE Service Partner**, an ISO/IEC 17025:2017 accredited metrology laboratory for calibration and periodic verification of masses and scales (NAWI and AWI) and adheres to the Laboratory's legal and scientific metrology update programmes.



Dini Argeo produces instruments type-approved or approvable for Legal for Trade use according to European standard EN 45501 and Directive 2014/31/EU.

The metrological marking indicates that the instrument has a type approval or type examination certificate, issued by a European Notified Body, which validates its suitability for legal use. This approval is essential for all legal-for-trade uses of the instrument.

XX: are the last two digits of the year when the metrology marking was affixed.

yy: indicates the identification number of the Notified Body involved in production control.



Dini Argeo is a member of the **UKWF (United Kingdom Weighing Federation)**, the national association of manufacturers, distributors, repairers, installers and service organisations involved in the UK weighing sector.



Dini Argeo is a member of the **CWIA (China Weighing Instrument Association)**, the national association of manufacturers, distributors, researchers, educators, and government officials involved in the weighing industry in China since 1983.



Dini Argeo manufactures GOST-R compliant instruments.



Dini Argeo is a member of **WIAA (Weighing Industry Association of Australia)**, the national body representing companies and enterprises involved in the manufacture, sale and service of laboratory, industrial and retail weighing instruments.

GENERAL CONDITIONS OF SALE AND WARRANTY

Sales prices are always net of VAT, to be paid by the buyer.

WARRANTY / TECHNICAL ASSISTANCE - ASSEMBLY

The warranty is 24 months from delivery, excluding parts classified as consumables, such as: print heads, batteries, mass memories (SD, USB, etc.), wheels and electric motors. The warranty on this consumable material is 3 months.

The warranty refers to the failure resulting from any construction defect or material defect of the supplied product and covers the cost of labour and replaced components. The product must be sent in its original packaging, with transport charged to the sender, to the Dini Argeo premises.

If the intervention is required at the place of use, the costs for the technician's travel will be borne by the applicant. The labour costs for the repair and the cost of any replaced components shall be borne by Dini Argeo.

The warranty does not apply to faults arising from improper use and failure to comply with operating instructions, electrical phenomena, tampering, unauthorised repair attempts, connections to other equipment or removal of the identification elements of the product (serial number, label, etc.). Any compensation for damages, direct or indirect, caused to the user by the failure or partial functioning of the instruments or systems sold, even during the warranty period, is excluded. The warranty on load cells excludes damage from shocks and overloads (overload is evident if, when measuring the output signal of the cell, powered and without load, an output voltage of more than 1 mV is measured).

REPAIRS - GOODS RETURNS - RMA

Repairs at Dini Argeo premises are carried out at the hourly rates in force and on the basis of the prices indicated in the spare parts list. If a repair estimate is required before proceeding, the applicant must make an explicit request at the time of sending the material to be repaired. In this case the repair will be carried out after acceptance of the cost estimate compiled by the Dini Argeo technical service.

Technical assistance and/or assembly at the customer's premises can be carried out after telephone agreement with the Dini Argeo technical and/or commercial service with written confirmation for acceptance of the conditions in force.

The repair of Dini Argeo products must be requested by sending the appropriate RMA (Return Material Authorisation) request form. Once the form has been received, the Technical Assistance Department will inform the applicant of the RMA number which must be indicated on the document accompanying the product. To use the service, simply access the customer reserved area and fill in the on-line form to send the material for repair.

The return of products is only accepted if previously agreed and confirmed by the Dini Argeo sales office.

TRANSPORT AND PACKAGING

Return of goods Dini Argeo premises. The risks of transport, loss and/or damage of the goods are borne by the buyer even if the goods travel postage paid. Transport by couriers contracted with Dini Argeo is available.

The prices indicated are inclusive of cardboard packaging up to a size of 680 x 520 x 320 mm. Larger packaging sizes are available with the use of pallets.

MINIMUM INVOICING / PAYMENT / OTHER CONDITIONS

For orders of less than 50 Euro, prices are net of discounts.

In the event of late payment, any collection costs and interest on arrears will be charged at an annual rate equal to the "prime rate" plus 5 percentage points.

Under no circumstances shall any disputes or claims entitle the buyer to delay or suspend payments.

Sales prices are considered accepted by Dini Argeo only after written confirmation by Dini Argeo of the purchase order and subject to sale.

Dini Argeo reserves the right of ownership on the material delivered until the payment of the goods by the customer.

For any dispute concerning the supply of products, the applicable law is Italian law and the competent court is Modena.

RESTRICTIONS ON THE SALE AND SUPPORT OF PRODUCTS

As countries and companies impose restrictions on where they can do business with, it is essential to understand how these restrictions may apply to your company in order to maintain business compliance.

Companies located in these countries may not purchase or service Rice Lake global brand products from our offices or through our authorised distributors; for the most current list of restricted countries and regions, please visit the [General Sales and Warranty](#) page of the Dini Argeo website.

DINI AR GEO

TECHNICAL TRAINING SEMINARS



TRAINING COURSES



WE OFFER **SPECIALISED TECHNICAL ADVICE**

and in-depth knowledge of our users' industry-specific requirements.



WE HOLD **TRAINING COURSES** and **WEBINARS**

that ensure knowledge is passed on to you.



In addition to technical training, we provide

A SERVICE OF **CUSTOMISED PROFESSIONAL CONSULTANCY**

- Integration of weighing systems with existing automation and management environments
- Research into the most suitable technological solutions for the customer's needs
- Regulatory updating
- Technical and legal metrology



www.diniargeo.com

THE NEW SERIES OF INSTRUCTIONAL VIDEOS

BY DINI ARGEO
TECHNICIANS!

SCALETALK

addresses the **most frequently asked questions** and **topics of interest** in a short and intuitive format.



With a collection of short instructional videos, **SCALETALK** provides guidance for performing simple and useful procedures on our weighing instruments independently.

 **DINI ARGEO**

Rice Lake Weighing Systems

SCALE TALK



Tips, tricks and best practices for Rice Lake Weighing Systems, Dini Argeo products and general scale equipment

Demonstrations by Dini Argeo technical experts

Available on **YouTube**, **Vimeo** and the Dini Argeo website

 YouTube

 vimeo



We invite you to subscribe to our **YOUTUBE** and **VIMEO** channels to stay up-to-date!

Dini Argeo dealer network
over 3500 partners
in more than 130 countries across the world

“YOUR WORLDWIDE PARTNER
FOR WEIGHING”

WHY CHOOSE DINI ARGEO?



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Fiorano Modenese • Italy
Tel. +39.0536 843418

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Fiorano Modenese • Italy
Tel. +39.0536 921784

OTHER DINI ARGEO LOCATIONS

DINI ARGEO WEIGHING INSTRUMENTS Ltd
China

DINI ARGEO UK Ltd
United Kingdom

DINI ARGEO FRANCE sarl
France

DINI ARGEO GMBH
Germany

DINI ARGEO OCEANIA
Australia



WORLDWIDE SERVICE AND SHIPPING

International group
with offices in America,
Europe, India, China,
Mexico and Oceania,
over 1100 employees
and a network of
specialised partners
in 130 countries
worldwide.



FAST SHIPPING

Dini Argeo always
keeps complete
systems in stock that
can be shipped quickly.



MADE IN ITALY

Dini Argeo weighing
solutions are made
in Italy and guarantee
the highest quality
standards.

The information in this document is approximate
and can be subject to variations without prior notice
by Dini Argeo, with respect of the norms in force.
The official technical data is available in the
updated version on the www.diniargeo.com website
or by contacting Dini Argeo Customer Service.

SALES SERVICE AND TECHNICAL ASSISTANCE



WEIGHTIND-CEN
Rev. 01/02/2025