

LOAD CELLS & WEIGHT TRANSMITTERS

CATALOGUE

 **DINI ARGEQ**
Scales - Weighing systems

A RICE LAKE WEIGHING SYSTEMS COMPANY

		Communication rate (Hz)	N. of scales/channels	Digital load cells	Analog output	RS485 Modbus RTU	PROFINET	PROFIBUS	EtherNet/IP	Modbus TCP/IP	EtherCAT	CANopen	DeviceNet	Inputs / triggers	Outputs / setpoint	
p. 86	4800	1		●	●	●	○	●	●	●	●	○	○	2	4	 for DIN rail
p. 88	2600	Up to 4		●	●	●	●	●	●	●	●	●	●	2	2	 for DIN rail
p. 90	2600	Up to 4			●											
p. 96	400	Up to 1		●	●	●	○	●	●	●	●	○	○	2	4	 for DIN rail
p. 98	400	1		●	●	○	○	○	○	○	○	○	○	2	2	 for DIN rail
p. 100	400	1		●	●		○							2	2	 for DIN rail
p. 102	400	Up to 4		●	●	●	●	●	●	●	●	○	○	2	2	 for DIN rail
p. 104	400			●	●									2	6	 panel mounting
p. 106	400	1		●	●		●							2	6	 panel mounting
p. 108	400	1		●	●		●							2	6	 panel mounting
p. 110	400	1		●	●	●								2	2	 for bench/wall
p. 112	400	1		●	●		●							2	2	 for bench/wall

● As standard

○ Special version, ask for estimate



DINI ARGEON

A RICE LAKE WEIGHING SYSTEMS COMPANY



LOAD CELL AND WEIGHT TRANSMITTER MANUFACTURER

Dini Argeo designs and manufactures load cells and weighing sensors that stand out for their high quality and ease of installation. Through its production lines and highly qualified specialized partners, Dini Argeo is able to produce load cells of every type and for every need, from precision weighing to safety control.


This catalogue contains a complete range of load cells with standard dimensions and capacities, designed by Dini Argeo to suit most weighing applications. Dini Argeo also offers a design and development service for special load cells, please contact our sales department for more information.



For over 20 years Dini Argeo has been producing weight transmitters of the DGT series that stand out for their reliability and reading accuracy in automated industrial weighing systems.

DGT transmitters are manufactured and designed in Italy by Dini Argeo and feature all the latest technologies available on the market.


Thanks to its team of highly qualified engineers, Dini Argeo is also able to develop fully customised, certified weighing electronics and firmware in compliance with international standards.

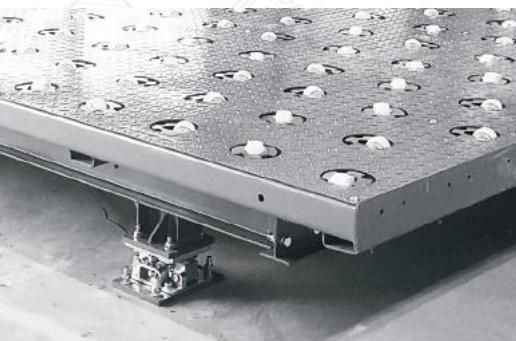




OFF-CENTER

Dini Argeo Off-Center/Single Point load cells are ideal for creating weighing areas with optimal measurement accuracy in any point. They are the best solution to create micro dispensers, weighing platforms, plates and belts at competitive prices. Thanks to their mechanical features, Off-Center load cells are particularly reactive and suitable for fast and dynamic weighing. They can be used both individually (single load cell systems) and in connection (systems with multiple load cells).

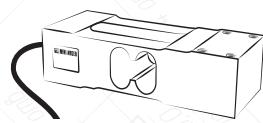

BENDING BEAM

Dini Argeo Bending Beam load cells combine the reactivity and accuracy of Off-Center/Single Point load cells with the strength of Shear Beam ones. The secret to achieving optimum accuracy with Bending Beam load cells is to apply the force in a specific point; for state-of-the-art installations, both in static and dynamic applications, Dini Argeo offers a complete range of mounting accessories. They are the best solution to create weighing roller conveyors and check-weighers. Ideal for systems with multiple load cells.

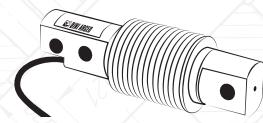

SHEAR BEAM

Dini Argeo Shear Beam load cells are the ideal solution to weigh medium capacity silos and hoppers and to create systems with multiple load cells, such as floor platforms. The secret to achieve optimum accuracy with Shear Beam load cells is to apply the force in a specific point; for state-of-the-art installations, both in static and dynamic applications, Dini Argeo offers a complete range of mounting accessories. Ideal for systems with multiple load cells.




DOUBLE SHEAR BEAM

Dini Argeo Double Shear Beam load cells have the same features as Shear beam load cells but with much higher load capacities. They find application in large capacity silo weighing and are the best choice for the construction of weighbridges. Ideal for systems with multiple load cells.




TENSION

Dini Argeo Tension / Compression load cells are perfect for weighing suspended loads or for measuring tensile or compressive forces, breaking loads or weight peaks. They represent the easiest solution to weigh a hopper, a big bag or any other load that has an irregular shape.

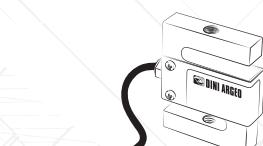

COMPRESSION

Dini Argeo Compression load cells are the best solution to weigh medium and large capacity silos, hoppers and tanks. The particular compact shape that characterises them is designed to weigh without mechanical bending, making them very robust and resistant even to extreme stress. Dini Argeo mounting kits for Compression load cells make them particularly easy to install under the structure to be weighed.

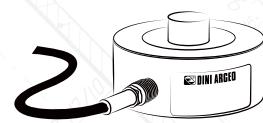

COLUMN

Dini Argeo Column load cells are ideal for the construction of weighbridges and large capacity silos weighing. Their shape allows the load to oscillate within the set limits and always return to its original position for optimum weighing. This feature is indispensable in the manufacture of state-of-the-art weighbridges.

Using Dini Argeo assembly kits, these load cells can accurately weigh large capacity silos and hoppers.




LOAD PINS

The advantage of the weighing pin is that it can be installed in place of an existing mechanical pin around which the movement of a part of the machinery takes place.

The weighing pin is made to measure, with mechanical resistance characteristics compatible with those of the existing pin.


It is used in moving applications such as mechanical lifting booms, cranes, overhead cranes, AGVs, on-board weighing and agricultural wagons.

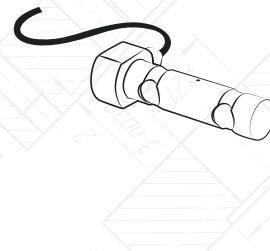

MOUNTING KITS


Dini Argeo mounting kits are designed to simplify the application of load cells to the structures to be weighed, ensuring the best weighing performance.

Each accessory offers precise features that make it ideal for specific applications, from belt and roller conveyor scales to the weighing of large capacity silos and hoppers.



JUNCTION BOXES

Dini Argeo offers a complete range of junction boxes and accessories to connect load cells to weighing electronics.



HIGH SPEED PROCESS & AUTOMATION WEIGHT TRANSMITTERS

These weight transmitters are designed for use in applications where a very high sampling rate is required in order to weigh with extreme precision in fractions of a second.


Ideal for belt weighing, dosing and micro-dosing, in-line filling and process control applications.



SAFETY & CONTROL WEIGHT TRANSMITTERS

These transmitters are the most convenient and cost-effective solution to create weight control and monitoring applications in industrial processes.

They are used to weigh silos, hoppers, roller conveyors and low-speed belts.



Application key



Weighing
belts



Platforms



Hoppers



Roller-
conveyors



Tanks
and silos



Weighbridges



Suspended
loads




Big bags



Weight peaks

SPO | OFF-CENTER

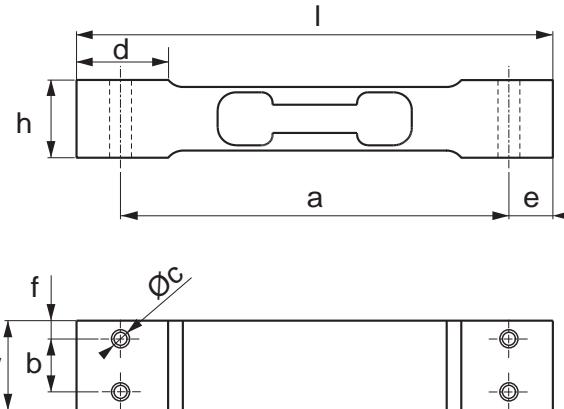

Version codes


Max (kg)	Plate Max (mm)	I (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c Ø (mm)	d (mm)	e (mm)	f (mm)	Code	
3	300 x 300	130	25,4	22	106	15	N°4 x M6	25	12	5	SPO3-1	
5											SPO5-1	
10											SPO10-1	
15											SPO15-1	
20											SPO20-1	
30											SPO30-1	
40	300 x 300	130	30	22	106	15	N°4 x M6	25	12	5	SPO40-1	

ATEX Certification

Option	Description	Code	
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1	

Technical features


Maximum number of verification intervals	nLC = 3.000
Maximum capacity	40 kg
Y value	Vmin = EMax / 8.000 - 15.000
Nominal rated output	2 mV/V ± 10 %
Temperature effect on full scale output	0,0117 % F.S. / 10 K (-10 °C / +20 °C) 0,0175 % F.S. / 10 K (+20 °C / +40 °C)
Temperature effect on zero	From ± 0,0093 % F.S. / 10 K to ± 0,0175 % F.S. / 10 K
Hysteresis	± 0,0166 % F.S.
Non-linearity	± 0,0166 % F.S.
Creep at nominal load over 30 minutes	-
Input resistance	300...500 Ω
Output resistance	300...500 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	-
Insulation resistance	> 2.000 MΩ
Zero balance	0 ± 0,12 mV/V (at 100 V)
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-10 °C / +50 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Nominal displacement	< 0,5 mm
Repeatability	-
Shielded cable	

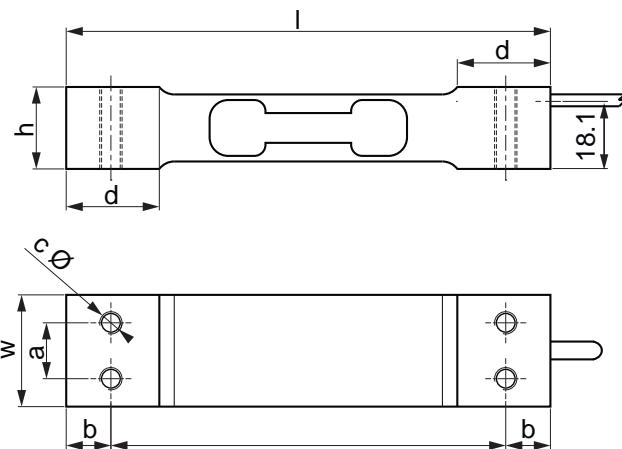SPD | OFF-CENTER**Version codes**

Max (kg)	Plate Max (mm)	I (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c Ø (mm)	d (mm)	Code
3	300 x 300	130	24	22	15	12	N°4 x M6	25	SPD3
5									SPD5
10									SPD10
15									SPD15
20	350 x 350	130	30	22	15	12	N°4 x M6	25	SPD20
35									SPD35
75									SPD75
Up to 200	-	-	-	-	-	-	-	-	-

Technical features

Maximum number of verification intervals	-
Maximum capacity	75 kg
Y value	Vmin = Emax / 10.000
Nominal rated output	2 mV/V ± 10%
Temperature effect on full scale output	0,0114 % F.S. / °C
Temperature effect on zero	0,0114 % F.S. / °C
Hysteresis	± 0,0166 % F.S.
Non-linearity	± 0,0166 % F.S.
Creep at nominal load over 30 minutes	± 0,0116 F.S. / °C
Input resistance	406 ± 15 Ω
Output resistance	350 ± 3 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	-
Insulation resistance	> 2.000 MΩ
Zero balance	0 ± 0,1 mV/V
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-10 °C / +70 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Nominal displacement	-
Repeatability	-
Shielded cable	 Ø 3,8 mm l = 3 m

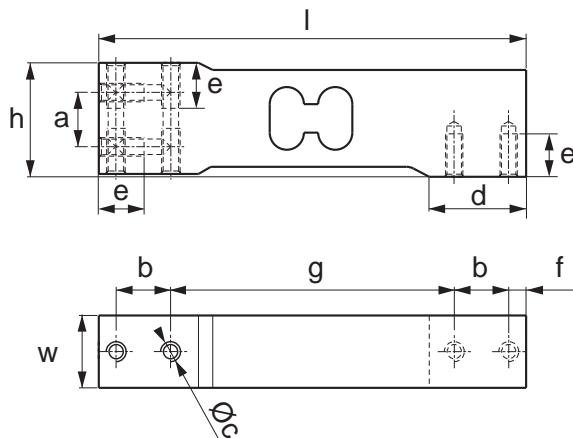SPG | OFF-CENTER

Version codes


Max (kg)	Plate Max (mm)	I (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c 0 (mm)	d (mm)	e (mm)	f (mm)	g (mm)	Code	
10	300 x 300	150	25,4	40	19,1	19,1	N°8 x M6	34	16	6,1	99,6	SPG10-1	
15												SPG15-1	
20	450 x 450	150	25,4	40	19,1	19,1	N°8 x M6	34	16	6,1	99,6	SPG20-1	
30												SPG30-1	
50												SPG50-1	
100	600 x 600	150	25,4	40	19,1	19,1	N°8 x M6	34	16	6,1	99,6	SPG100-1	
200												SPG200-1	

ATEX Certification

Option	Description	Code	
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1	

Technical features

Maximum number of verification intervals	nLC = 3.000
Maximum capacity	200 kg
Y value	Vmin = EMax / 10.000 - 15.000
Nominal rated output	2 mV/V ± 10%
Temperature effect on full scale output	0,011 % F.S. / 10 K (-10 °C / +20 °C) 0,017 % F.S. / 10 K (+20 °C / +40 °C)
Temperature effect on zero	From ± 0,0093 % F.S. / 10 K to ± 0,0140 % F.S. / 10 K
Hysteresis	± 0,0166 % F.S.
Non-linearity	± 0,0166 % F.S.
Creep at nominal load over 30 minutes	-
Input resistance	300...500 Ω
Output resistance	300...500 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	-
Insulation resistance	> 2.000 MΩ
Zero balance	0 ± 0,12 mV/V (at 100 V)
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-10 °C / +50 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Nominal displacement	< 0,5 mm
Repeatability	-
Shielded cable	Ø 4,7 mm l = 3 m

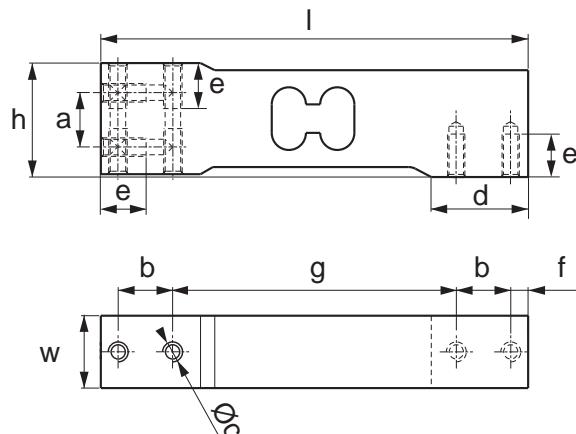SPG C6 | OFF-CENTER**Version codes**

Max (kg)	Plate Max (mm)	I (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c 0 (mm)	d (mm)	e (mm)	f (mm)	g (mm)	Code
7	300 x 300	150	25,4	40	19,1	19,1	N°8 x M6	34	16	6,1	99,6	SPG7C6-1
10												SPG10C6-1
18	450 x 450	150	25,4	40	19,1	19,1	N°8 x M6	34	16	6,1	99,6	SPG18C6-1
36												SPG36C6-1


ATEX Certification

Option	Description	Code
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1

Technical features

Maximum number of verification intervals	nLC = 6.000
Maximum capacity	36 kg
Y value	Vmin = EMax / 14.000 - 25.000
Nominal rated output	2 mV/V ± 10 %
Temperature effect on full scale output	0,0058 % F.S. / 10 K (-10 °C / +20 °C) 0,087 % F.S. / 10 K (+20 °C / +40 °C)
Temperature effect on zero	From ± 0,0056 % F.S. / 10 K to ± 0,01 % F.S. / 10 K
Hysteresis	± 0,0083 % F.S.
Non-linearity	± 0,0083 % F.S.
Creep at nominal load over 30 minutes	-
Input resistance	300...500 Ω
Output resistance	300...500 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	-
Insulation resistance	> 2.000 MΩ
Zero balance	0 ± 0,1 mV/V (at 100 V)
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-10 °C / +50 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Nominal displacement	< 0,5 mm
Repeatability	-
Shielded cable	

SPM | OFF-CENTER

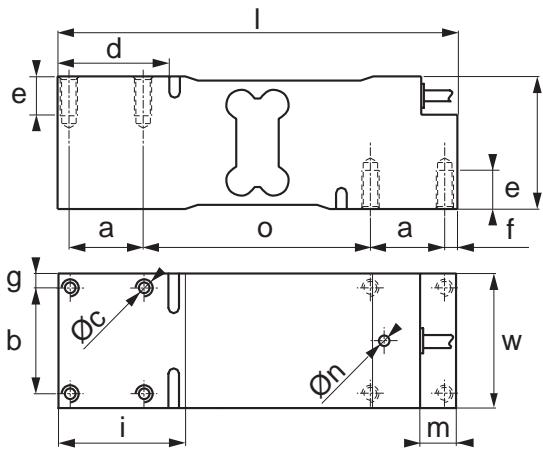

Version codes


Max (kg)	Plate Max (mm)	I (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c 0 (mm)	d (mm)	e (mm)	f (mm)	g (mm)	i (mm)	m (mm)	n (mm)	o (mm)	Code	
100	600 x 600	188	63,5	62,3	35	50	N°8 x M8	52	16	5,5	6,75	60	17	5	107	SPM100	OIML R60
200																SPM200	OIML R60
500																SPM500	OIML R60

ATEX Certification

Option	Description	Code
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1

Technical features

Maximum number of verification intervals	nLC = 3.000
Maximum capacity	500 kg
Y value	Vmin = EMax / 10.000 - 15.000
Nominal rated output	2 mV/V ± 10%
Temperature effect on full scale output	± 0,0117 % F.S. / 10 K (-10 °C / +20 °C) ± 0,0175 % F.S. / 10 K (+20 °C / +40 °C)
Temperature effect on zero	From ± 0,0093 % F.S. / 10 K to ± 0,0140 % F.S. / 10 K
Hysteresis	± 0,0166 % F.S.
Non-linearity	± 0,0166 % F.S.
Creep at nominal load over 30 minutes	-
Input resistance	300...500 Ω
Output resistance	300...500 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	-
Insulation resistance	> 2.000 MΩ
Zero balance	0 ± 0,1 mV/V (at 100 V)
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-10 °C / +50 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Nominal displacement	< 0,5 mm
Repeatability	-
Shielded cable	

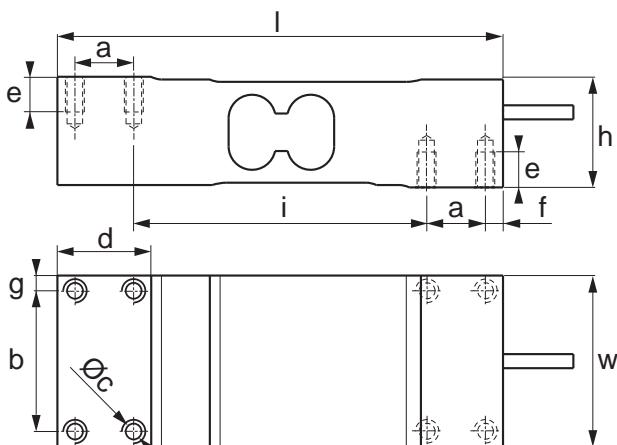SPBC | OFF-CENTER**Version codes**

Max (kg)	Plate Max (mm)	I (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c 0 (mm)	d (mm)	e (mm)	f (mm)	g (mm)	i (mm)	Code	
100													SPBC100	
200													SPBC200	
300	700 x 700	190	73	47	25	60	N°8 x M8	40	15	7,5	6,5	125	SPBC300	
500													SPBC500	
630													SPBC630	


ATEX Certification

Option	Description	Code	
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1	

Technical features

Maximum number of verification intervals	nLC = 3.000
Maximum capacity	630 kg
Y value	Vmin = EMax / 10.000
Nominal rated output	2 mV/V ± 10 %
Temperature effect on full scale output	0,0014 % / °C
Temperature effect on zero	0,0014 % / °C
Hysteresis	-
Non-linearity	-
Creep at nominal load over 30 minutes	0,025 % F.S.
Input resistance	410 ± 20 Ω
Output resistance	350 ± 5 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	0,017 % F.S.
Insulation resistance	> 1.000 MΩ
Zero balance	± 10 % F.S.
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-20 °C / +60 °C
Safe overload	150 % F.S.
Breaking load	200 % F.S.
Nominal displacement	-
Repeatability	-
Shielded cable	<p>Ø 5 mm l = 3 m</p>

SPN | OFF-CENTER

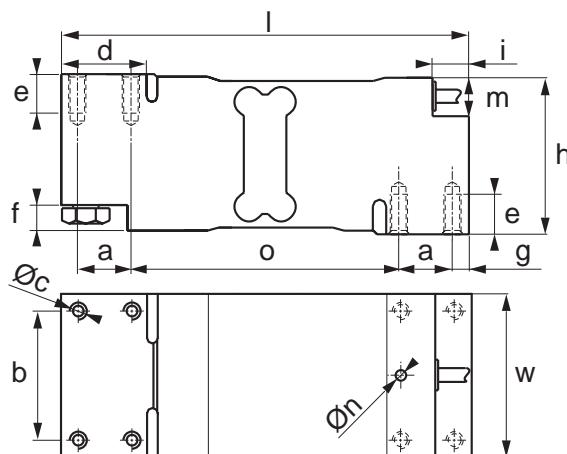

Version codes


Max (kg)	Plate Max (mm)	I (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c Ø (mm)	d (mm)	e (mm)	f (mm)	g (mm)	i (mm)	m (mm)	n Ø (mm)	o (mm)	Code	
300																SPN300	
500	800 x 800	191	76	75	25	60	N°8 x M8	40	16	12	8	21	18	5	125	SPN500	
750																SPN750	

ATEX Certification

Option	Description	Code	
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1	

Technical features

Maximum number of verification intervals	nLC = 3.000
Maximum capacity	750 kg
Y value	Vmin = EMax / 10.000 - 15.000
Nominal rated output	2 mV/V ± 10 %
Temperature effect on full scale output	0,0117 % F.S. / 10 K (-10 °C / +20 °C) 0,0175 % F.S. / 10 K (+20 °C / +40 °C)
Temperature effect on zero	From ± 0,0093 % F.S. / 10 K to ± 0,0140 % F.S. / 10 K
Hysteresis	± 0,0166 % F.S.
Non-linearity	± 0,0166 % F.S.
Creep at nominal load over 30 minutes	-
Input resistance	300...500 Ω
Output resistance	300...500 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	-
Insulation resistance	> 2.000 MΩ
Zero balance	0 ± 0,1 mV/V (at 100 V)
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-10 °C / +50 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Nominal displacement	< 0,5 mm
Repeatability	-
Shielded cable	

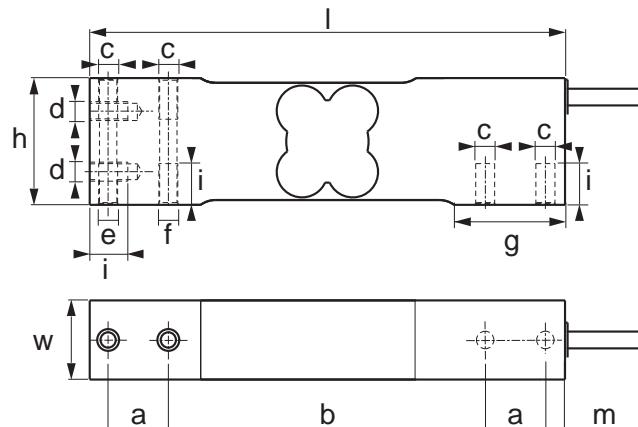SPSW | OFF-CENTER

Version codes

Max (kg)	Plate Max (mm)	I (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c Ø (mm)	d Ø (mm)	e Ø (mm)	f Ø (mm)	g (mm)	i (mm)	m (mm)	Code	
7,5	500 x 400	150	25	40	19	100	N°4 x M6	N°2 x M6	M6	M6 x 0,5 (1 x)	35	13	6,2	SPSW7,5	
15														SPSW15	
30														SPSW30	
50														SPSW50	
100														SPSW100	
200														SPSW200	


ATEX Certification

Option	Description	Code	
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1	

Technical features

Maximum number of verification intervals	nLC = 3.000
Maximum capacity	200 kg
Y value	Vmin = EMax / 10.000 - 15.000
Nominal rated output	2 mV/V ± 10 %
Temperature effect on full scale output	± 0,0117 % F.S. / 10 K (-10 °C / +20 °C) ± 0,0175 % F.S. / 10 K (+20 °C / +40 °C)
Temperature effect on zero	From ± 0,0093 % F.S. / 10 K to ± 0,0140 % F.S. / 10 K
Hysteresis	± 0,0166 % F.S.
Non-linearity	± 0,0166 % F.S.
Creep at nominal load over 30 minutes	-
Input resistance	300...500 Ω
Output resistance	300...500 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	-
Insulation resistance	> 1.000 MΩ (at 100 V)
Zero balance	0 ± 0,1 mV/V
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-10 °C / +50 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Nominal displacement	< 0,2 mm
Repeatability	-
Shielded cable	

SPSY | OFF-CENTER

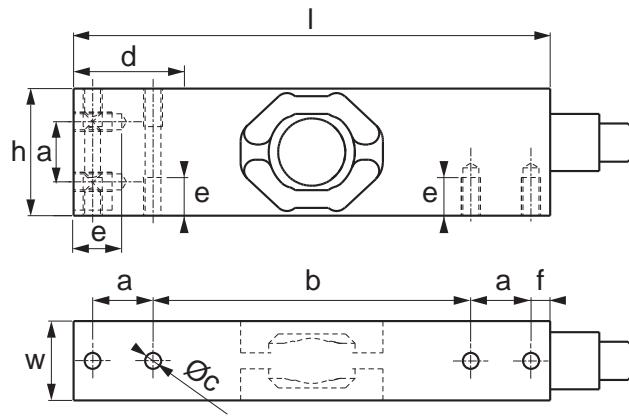


Version codes

Max (kg)	Plate Max (mm)	I (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c 0 (mm)	d (mm)	e (mm)	f (mm)	Code	
10											SPSY10	
20											SPSY20	
50											SPSY50	
100	500 x 400	150	25	40	19	100	N°8 x M6	35	12	6	SPSY100	

Technical features

Maximum number of verification intervals	nLC = 3.000
Maximum capacity	100 kg
Y value	Vmin = EMax / 10.000
Nominal rated output	2 mV/V ± 10 %
Temperature effect on full scale output	± 0,0117 % F.S. / 10 K (-10 °C / +20 °C) ± 0,0175 % F.S. / 10 K (+20 °C / +40 °C)
Temperature effect on zero	± 0,014 % F.S. / 10 K
Hysteresis	± 0,0166 % F.S.
Non-linearity	± 0,0166 % F.S.
Creep at nominal load over 30 minutes	-
Input resistance	300...500 Ω
Output resistance	300...500 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	-
Insulation resistance	> 1.000 MΩ (at 100 V)
Zero balance	0 ± 0,1 mV/V
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-10°C / +50 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Nominal displacement	< 0,5 mm
Repeatability	-
Shielded cable	

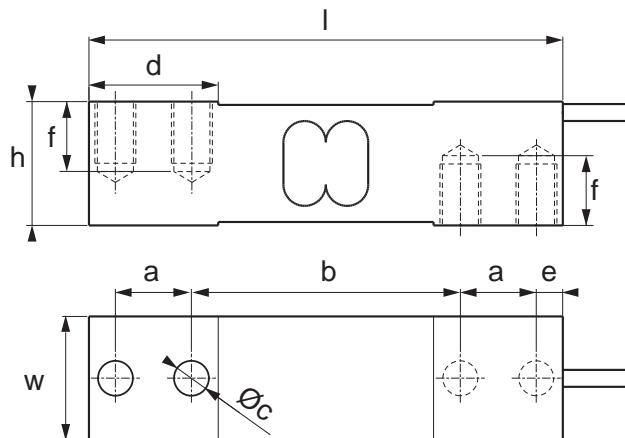SPSX | OFF-CENTER**Version codes**

Max (kg)	Plate Max (mm)	I (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c Ø (mm)	d (mm)	e (mm)	f (mm)	Code	
100	800 x 800	139,7	30,5	30,2	22,4	79,3	N°4 x M10	38	7,8	15	SPSX100	
300	800 x 800	139,7	30,5	30,2	22,4	79,3	N°4 x M10	38	7,8	15	SPSX300	
500	800 x 800	139,7	36,5	36,5	22,4	79,3	N°4 x M12	38	7,8	19	SPSX500	


ATEX Certification

Option	Description	Code
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1

Technical features

Maximum number of verification intervals	nLC = 3.000
Maximum capacity	500 kg
Y value	Vmin = EMax / 10.000 - 15.000
Nominal rated output	2 mV/V ± 10 %
Temperature effect on full scale output	± 0,0117 % F.S. / 10 K (-10 °C / +20 °C) ± 0,0170 % F.S. / 10 K (+20 °C / +40 °C)
Temperature effect on zero	From ± 0,0093 % F.S. / 10 K to ± 0,0140 % F.S. / 10 K
Hysteresis	± 0,0166 % F.S.
Non-linearity	± 0,0166 % F.S.
Creep at nominal load over 30 minutes	-
Input resistance	390 ± 15 Ω
Output resistance	359 ± 10 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	-
Insulation resistance	> 2.000 MΩ (at 100 V)
Zero balance	0 ± 0,1 mV/V
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-10 °C / +50 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Nominal displacement	< 0,5 mm
Repeatability	-
Shielded cable	

SPSZ | OFF-CENTER

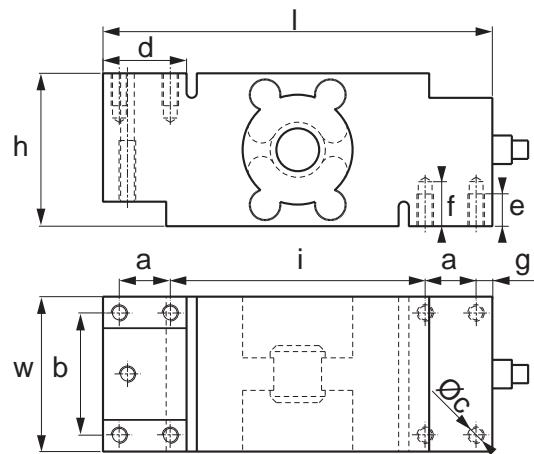


Version codes

Max (kg)	Plate Max (mm)	I (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c Ø (mm)	d (mm)	e (mm)	f (mm)	g (mm)	i (mm)	Code	
500	800 x 800	191	76	75	25	60	Nº9 x M12	41	16	22	8	125	SPSZ500	OIML R60
1.000													SPSZ1000	OIML R60

Technical features

Maximum number of verification intervals	nLC = 3.000
Maximum capacity	1.000 kg
Y value	Vmin = EMax / 10.000
Nominal rated output	2 mV/V ± 10 %
Temperature effect on full scale output	± 0,0117 % F.S. / 10 K (-10 °C / +20 °C) ± 0,0170 % F.S. / 10 K (+20 °C / +40 °C)
Temperature effect on zero	From ± 0,0112 % F.S. / 10 K to ± 0,0186 % F.S. / 10 K
Hysteresis	± 0,0166 % F.S.
Non-linearity	± 0,0166 % F.S.
Creep at nominal load over 30 minutes	± 0,01 % F.S.
Input resistance	380 ± 15 Ω
Output resistance	300...500 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	-
Insulation resistance	> 2.000 MΩ (at 100 V)
Zero balance	-
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-10 °C / +50 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Nominal displacement	< 0,3 mm
Repeatability	-
Shielded cable	 Ø 5 mm l = 3 m

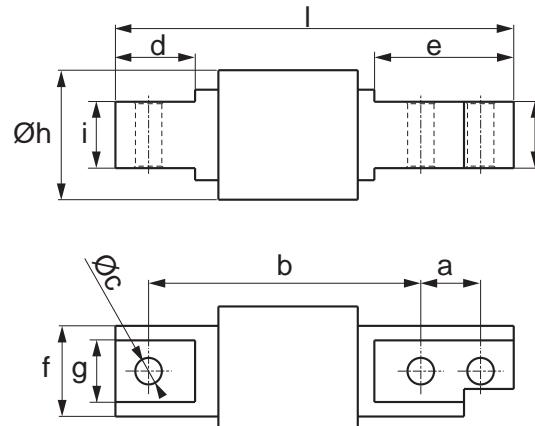FXC | BENDING BEAM

Version codes

	Max (kg)	l (mm)	h Ø (mm)	a (mm)	b (mm)	c Ø (mm)	d (mm)	e (mm)	f (mm)	g (mm)	i (mm)	Code	
SHEAR BEAM	10	120	39	18	82	N°3 x 8	24	42	27,3	18,5	20	FXC10-1	
	20											FXC20-1	
	50											FXC50-1	
	100											FXC100-1	
	200											FXC200-1	
	300											FXC300-1	
	500											FXC500-1	

ATEX Certification

Option	Description	Code	
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1	

Technical features

Maximum number of verification intervals	nLC= 3.000
Maximum capacity	500 kg
Y value	Vmin = EMax / 10.000
Nominal rated output	2 mV/V \pm 1 %
Temperature effect on full scale output	\pm 0,0014 % / °C
Temperature effect on zero	\pm 0,0014 % / °C
Hysteresis	-
Non-linearity	-
Creep at nominal load over 30 minutes	\pm 0,025 % F.S.
Input resistance	385 \pm 20 Ω
Output resistance	350 \pm 5 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	0,017 % F.S.
Insulation resistance	> 5.000 M Ω
Zero balance	\pm 2,5 % F.S.
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-20 °C / +60 °C
Safe overload	150 % F.S.
Breaking load	200 % F.S.
Nominal displacement	< 0,4 mm
Repeatability	0,015 % F.S.
Shielded cable	


Main options and accessories (for a complete list visit www.diniargeo.com)

Mounting kits	Material	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code	
	Stainless steel	Up to 500 kg	-	-	KFX (load cell not included)	
	Stainless steel	Up to 500 kg	-	-	KFXDN (load cell not included)	

Joints	Material	Description	Threading	Code	
	Stainless steel / Rubber	Elastic joint for load cells up to 500 kg	M8 x 32 mm	AVM8	
	Stainless steel	Ball joint perfect to improve weighing performance	8,3 x 9 mm	SBJ8	

Base plates	Material	Description	Hole size	Code	
	Stainless steel	Thickness for load cells up to 500 kg. Size (l x w x h): 42 x 30 x 10 mm.	9 mm (for M8 screw)	BPFX10	

FXC C6 | BENDING BEAM

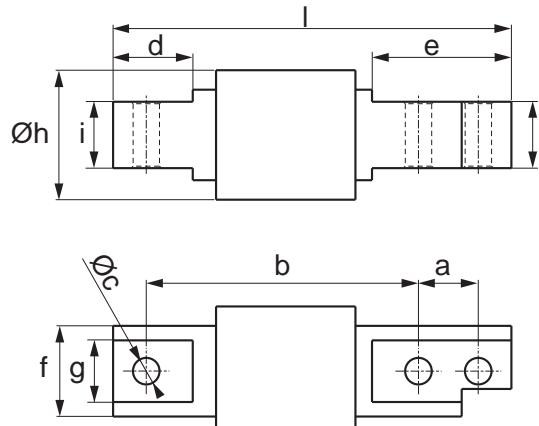

Version codes

Max (kg)	l (mm)	h Ø (mm)	a (mm)	b (mm)	c Ø (mm)	d (mm)	e (mm)	f (mm)	g (mm)	i (mm)	Code	
20	120	39	18	82	N°3 x 8	24	42	27,3	18,5	20	FXC20C6-1	
50											FXC50C6-1	
100											FXC100C6-1	
200											FXC200C6-1	

ATEX Certification

Option	Description	Code	
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1	

Technical features

Maximum number of verification intervals	nLC = 6.000
Maximum capacity	200 kg
Y value	Vmin = EMax / 10.000
Nominal rated output	2 mV/V ± 1 %
Temperature effect on full scale output	± 0,0007 % / °C
Temperature effect on zero	± 0,0014 % / °C
Hysteresis	-
Non-linearity	-
Creep at nominal load over 30 minutes	± 0,012 % F.S.
Input resistance	385 ± 20 Ω
Output resistance	350 ± 5 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	0,008 % F.S.
Insulation resistance	> 5.000 MΩ
Zero balance	± 2,5 % F.S.
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-20 °C / +60 °C
Safe overload	150 % F.S.
Breaking load	200 % F.S.
Nominal displacement	-
Repeatability	-
Shielded cable	


Main options and accessories (for a complete list visit www.diniargeo.com)

Mounting kits	Material	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code	
	Stainless steel	Up to 500 kg	-	-	KFX (load cell not included)	
	Stainless steel	Up to 500 kg	-	-	KFXDN (load cell not included)	

Joints	Material	Description	Threading	Code	
	Stainless steel / Rubber	Elastic joint for load cells up to 500 kg	M8 x 32 mm	AVM8	
	Stainless steel	Ball joint perfect to improve weighing performance	8,3 x 9 mm	SBJ8	

Base plates	Material	Description	Hole size	Code	
	Stainless steel	Thickness for load cells up to 500 kg. Size (l x w x h): 42 x 30 x 10 mm.	9 mm (for M8 screw)	BPFX10	

FXD | BENDING BEAM

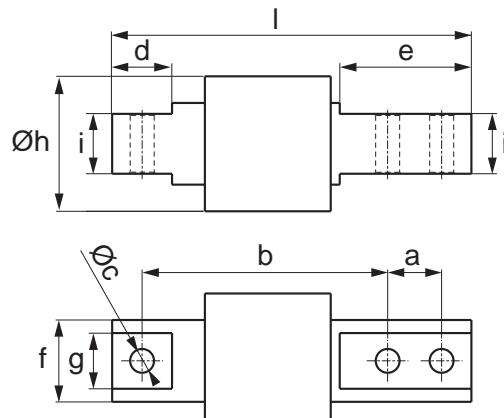

Version codes

	Max (kg)	I (mm)	h Ø (mm)	a (mm)	b (mm)	c Ø (mm)	d (mm)	e (mm)	f (mm)	g (mm)	i (mm)	Code	
SHEAR BEAM	10	120	45	18	82	N°3 x 8	20	44	27,3	18,6	20	FXD10	
	20											FXD20	
	50											FXD50	
	100											FXD100	
	200											FXD200	
	300											FXD300	
	500											FXD500	

ATEX Certification

Option	Description	Code	
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1	

Technical features


Maximum number of verification intervals	nLC= 3.000
Maximum capacity	500 kg
Y value	Vmin = EMax / 10.000
Nominal rated output	2 mV/V ± 0,1 %
Temperature effect on full scale output	± 0,02 % F.S. / 10 °C
Temperature effect on zero	± 0,02 % F.S. / 10 °C
Hysteresis	± 0,02 % F.S.
Non-linearity	± 0,02 % F.S.
Creep at nominal load over 30 minutes	± 0,012 % F.S.
Input resistance	385 ± 10 Ω
Output resistance	350 ± 3 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	0,012 % F.S.
Insulation resistance	> 5.000 MΩ
Zero balance	1% F.S.
Compensated temperature range	-10 °C / +50 °C
Operating temperature range	-20 °C / +60 °C
Safe overload	120 % F.S.
Breaking load	150 % F.S.
Nominal displacement	< 0,4 mm
Repeatability	± 0,01 % F.S.
Shielded cable	

Main options and accessories (for a complete list visit www.diniargeo.com)

Mounting kits	Material	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code	
	Stainless steel	Up to 500 kg	-	-	KFX (load cell not included)	
	Stainless steel	Up to 500 kg	-	-	KFXDN (load cell not included)	

Joints	Material	Description	Threading	Code	
	Stainless steel / Rubber	Elastic joint for load cells up to 500 kg	M8 x 32 mm	AVM8	
	Stainless steel	Ball joint perfect to improve weighing performance	8,3 x 9 mm	SBJ8	

Base plates	Material	Description	Hole size	Code	
	Stainless steel	Thickness for load cells up to 500 kg. Size (l x w x h): 42 x 30 x 10 mm.	9 mm (for M8 screw)	BPFX10	

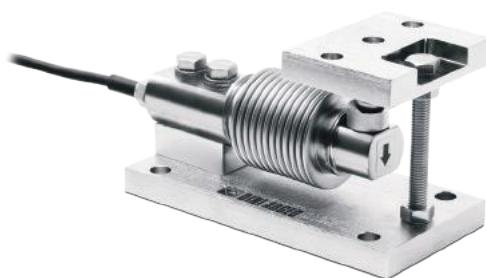KFX | MOUNTING KIT

Mounting kits for FXC / FXD series bending beam load cells up to 500 kg with single anti-tipping system and side force compensation. Suitable for weighing belts, small and medium hoppers, tanks and mixers.
Fitted with ball joint for high-precision weighing.

Version codes

Mounting kits	Material	Weight (kg)	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code
	Stainless steel	1,5	Up to 500 kg (load cell capacity)	-	-	KFX

ATEX certification

Option	Description	Code
	ATEX declaration for the PLATFORM / LOAD CELL ASSEMBLY KIT (for load cell ATEX declaration see CCATEX code). Option to be offered only if the platform is ordered without the indicator, otherwise refer to the available certifications for the chosen weight indicator.	DCATEXMECH

Technical features


Construction in electropolished stainless steel AISI 304
Anti-tipping system
Locking/bypass system for easy transport and maintenance
Overload protection nuts
Grounding cable for protection against electrostatic discharges
ATEX version available for zones 1&21, 2&22

Main options and accessories (for a complete list visit www.diniargeo.com)

Option	Description	Code
	Galvanised stay rod with ball-and-socket joints. Max 100 kN. For proper installation, 2xLNKST are needed.	LNK2635
	Single plate for stay rod. Fitted with fixing screw. For proper installation, LNK2635 and a second LNKST are needed.	LNKST

This kit is designed to allow the correct functioning of the cells and the requested weighing accuracy, within the limits described into the technical manual.

Technical drawing (mm)

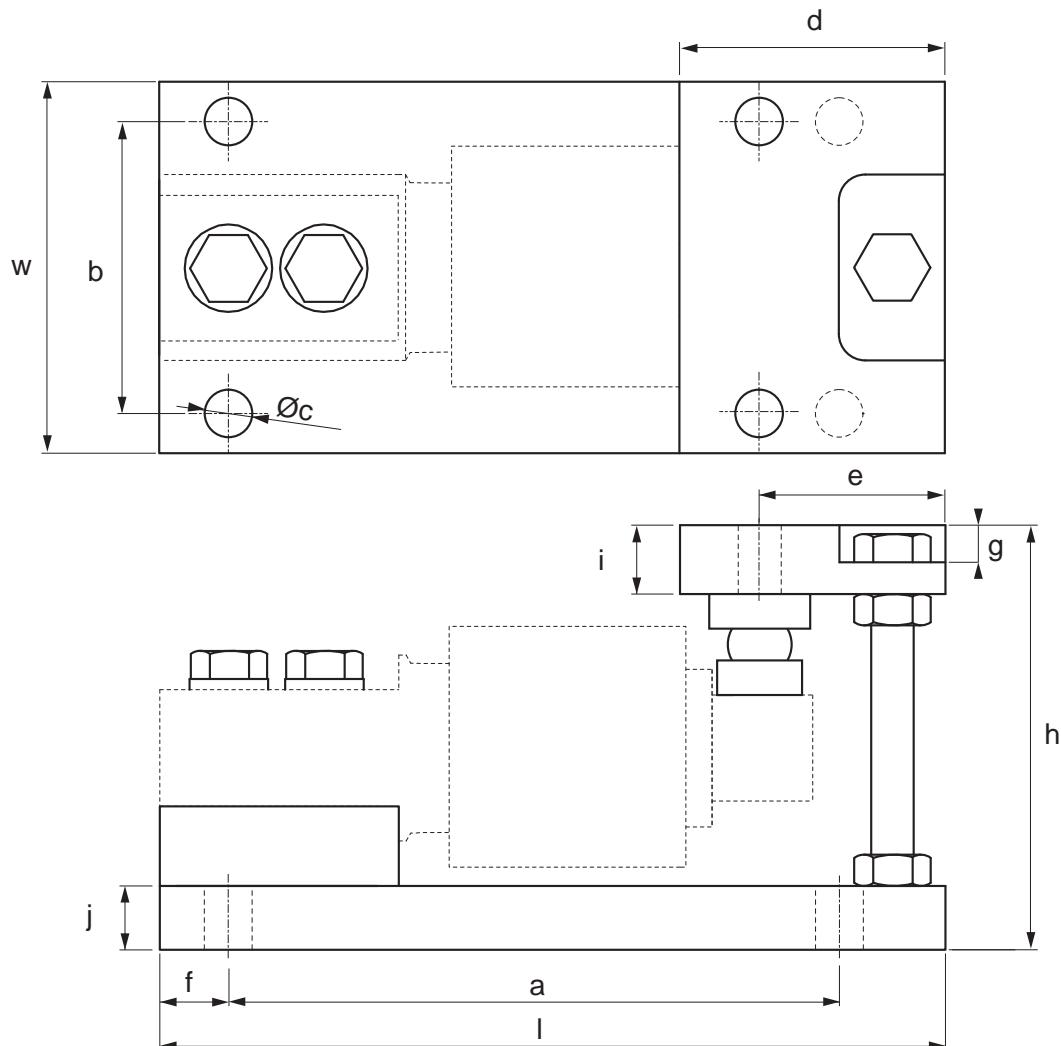

Max (kg)	I (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c Ø (mm)	d (mm)	e (mm)	f (mm)	g (mm)	i (mm)	j (mm)	Code
500	148	70	80	115	55	N°6 x 9	50	35	13	7	13	12	KFX

KFXDN | MOUNTING KIT

STAINLESS STEEL

Mounting kits for FXC / FXD series bending beam load cells up to 500 kg. Suitable for weighing belts, small and medium hoppers, tanks and mixers.

Version codes

Mounting kits	Material	Weight (kg)	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code	
	Stainless steel	1,4	Up to 300 kg (load cell capacity)	-	-	KFXDN (Load cell not included)	

ATEX certification

Option	Description	Code	
	ATEX declaration for the PLATFORM / LOAD CELL ASSEMBLY KIT (for load cell ATEX declaration see CCATEX code). Option to be offered only if the platform is ordered without the indicator, otherwise refer to the available certifications for the chosen weight indicator.	DCATEXMECH	

Technical features



Construction in stainless steel AISI 304
Locking / bypass system for easy transport and maintenance
Upper plate with elastic joint for vibration absorption and expansion compensation
ATEX version available for zones 1&21, 2&22

Main options and accessories (for a complete list visit www.diniargeo.com)


Option	Description	Code	
	Galvanised stay rod with ball-and-socket joints. Max 100 kN. For proper installation, 2xLNKST are needed.	LNK2635	
	Single plate for stay rod. Fitted with fixing screw. For proper installation, LNK2635 and a second LNKST are needed.	LNKST	
	Grounded cable for weighing kit. 16 mm ² cable, 13 mm eyelets.	GNDC	

This kit is designed to allow the correct functioning of the cells and the requested weighing accuracy, within the limits described into the technical manual.

Technical drawing (mm)

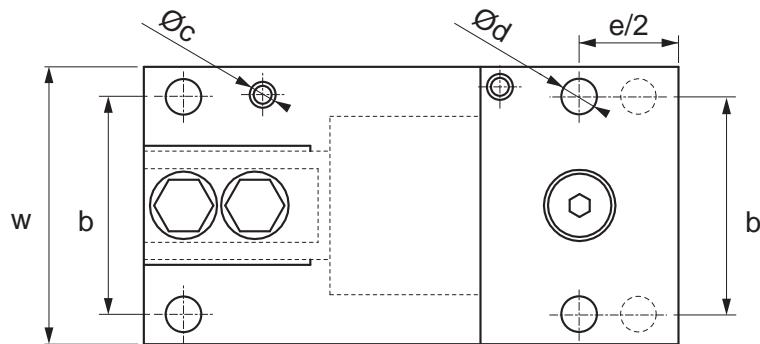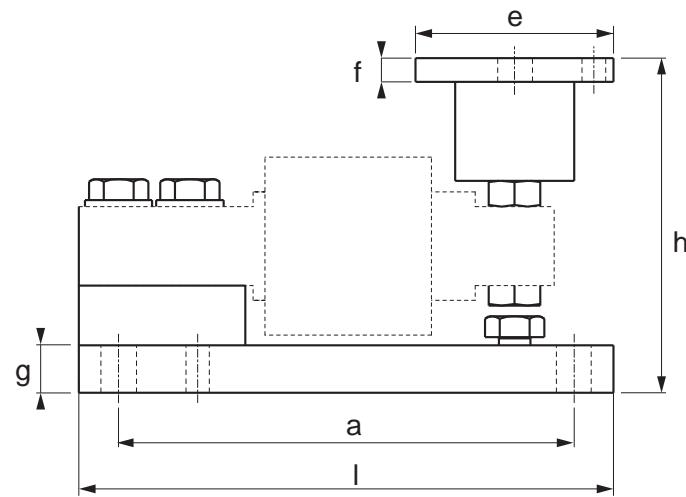

Max (kg)	l (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c Ø (mm)	d Ø (mm)	e (mm)	f (mm)	g (mm)	Code
500	135	70	84,5	115	55	N°2 x 5	N°6 x 9	50	6	12	KFXDN

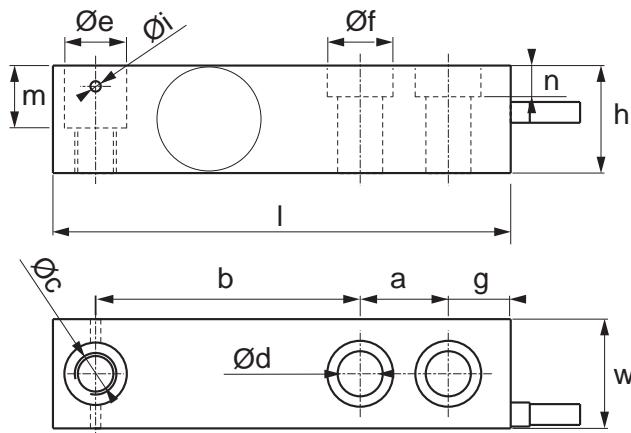SBT | SHEAR BEAM

Version codes

Max (kg)	I (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c Ø (mm)	d Ø (mm)	e Ø (mm)	f Ø (mm)	g (mm)	i Ø (mm)	m (mm)	n (mm)	Code	
500														SBT500	
1.000	132	31,5	31	25,4	76,3	N°1 x M12	N°2 x 13	18	19	18	3	18	9	SBT1000	
2.000														SBT2000	

ATEX certification

Option	Description	Code	
	Optional ATEX version (see www.diniargeo.com for additional details).	CCATEX3GD	

Technical features

Maximum number of verification intervals	nLC = 3.000
Maximum capacity	2.000 kg
Y value	Vmin = EMax / 10.000
Nominal rated output	2 mV/V ± 0,5 %
Temperature effect on full scale output	0,02 % F.S. / 10 °C
Temperature effect on zero	0,02 % F.S. / 10 °C
Hysteresis	± 0,02 % F.S.
Non-linearity	± 0,02 % F.S.
Creep at nominal load over 30 minutes	0,02 % F.S.
Input resistance	380 ± 20 Ω
Output resistance	350 ± 5 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	0,017 % F.S.
Insulation resistance	> 5.000 MΩ
Zero balance	± 1 % F.S.
Compensated temperature range	-10 °C / +50 °C
Operating temperature range	-20 °C / +60 °C
Safe overload	120 % F.S.
Breaking load	300 % F.S.
Nominal displacement	-
Repeatability	± 0,01 % F.S.
Shielded cable	Ø 5 mm l = 3,5 m

Main options and accessories (for a complete list visit www.diniargeo.com)

Mounting kits	Material	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code
	Nickel-plated steel	2.500 kg	10	-	KSBC2 (load cell not included)
	Galvanised steel	2.500 kg	-	-	KSBN2 (load cell not included)
	Stainless steel	2.500 kg	10	-	KSBX2 (load cell not included)
	Stainless steel	2.000 kg	-	-	KSB2H


Option	Description	Code
	Galvanised stay rod with ball-and-socket joints. Max 100 kN. For proper installation, 2xLNKST are needed.	LNK2635
	Single plate for stay rod. Fitted with fixing screw. For proper installation, LNK2635 and a second LNKST are needed.	LNKST
	Grounded cable for weighing kit. 16 mm ² cable, 13 mm eyelets.	GNDC

This kit is designed to allow the correct functioning of the cells and the requested weighing accuracy, within the limits described into the technical manual.

Foot	Material	Load cell compatibility	Threading	Code
	Stainless steel	For load cells up to 2.500 kg	M12 x 43 mm	SBFI-1
	Stainless steel	For load cells up to 2.500 kg	M12 x 45 mm	KSB2FI-1
	Nickel-plated steel	For load cells up to 2.500 kg	M12 x 45 mm	SBFA
Bushes	Material	Foot compatibility	Threading	Code
	Stainless steel	M12 bush	M12 x 25 mm	BLKM12I

Joints	Material	Description	Threading	Code
	Stainless steel / Rubber	Elastic joint for load cells up to 2.500 kg	M12 x 32 mm	AVM12
	Stainless steel	Ball joint perfect to improve weighing performance	M12 x 32 mm	SBJ12

Base plates	Material	Description	Hole size	Code
	Stainless steel	Thickness for load cells up to 2.500 kg. Size (l x w x h): 55 x 30 x 5 mm.	N° 2 x 13 mm	BPSB5
	Stainless steel	Thickness for load cells up to 2.500 kg. Size (l x w x h): 55 x 30 x 3 mm.	N° 2 x 13 mm	BPSB3

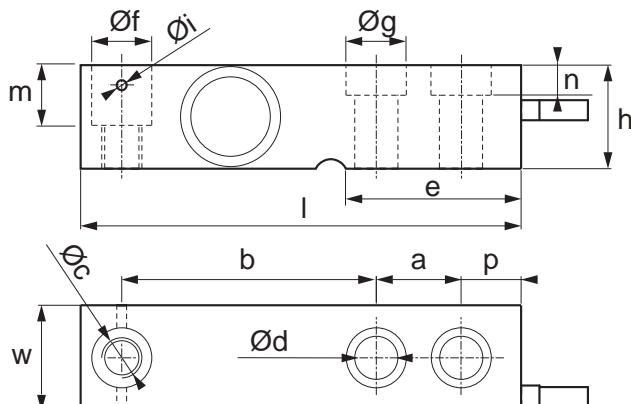SBX | SHEAR BEAM

Version codes

Max (kg)	I (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c Ø (mm)	d Ø (mm)	e (mm)	f Ø (mm)	g Ø (mm)	i Ø (mm)	m (mm)	n (mm)	p (mm)	Code
500															SBX500-1KL
1.000	132	31,5	31	25,4	76,3	Nº1 x M12	Nº2 x 13	52,5	18	18	3	18	9	18	SBX1000-1KL
2.000															SBX2000-1KL
2.500															SBX2500-1KL
3.000	171,5	38	38	38,1	95,3	Nº1 x M20	Nº2 x 20,5	70	30,2	28	-	19	10	19,1	SBX3000-1KL
4.500															SBX4500-1KL
10.000	222,5	50,8	50,8	50,8	123,8	Nº1 x M24	Nº2 x 27	95	27	-	-	26	-	25,4	SBX10000-1KL

Technical features

Maximum number of verification intervals	nLC = 3.000
Maximum capacity	10.000 kg
Y value	Vmin = EMax / 10.000
Nominal rated output	2 mV/V +/- 0,5 %
Temperature effect on full scale output	0,002 % / °C
Temperature effect on zero	0,002 % / °C
Hysteresis	0,02 % F.S.
Non-linearity	0,02 % F.S.
Creep at nominal load over 30 minutes	0,02 % F.S.
Input resistance	1.100 ± 20 Ω
Output resistance	1.000 ± 20 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	0,017 % F.S.
Insulation resistance	> 5.000 MΩ
Zero balance	-
Compensated temperature range	-10 °C / +50 °C
Operating temperature range	-20 °C / +60 °C
Safe overload	120 % F.S.
Breaking load	300 % F.S.
Nominal displacement	-
Repeatability	-
Shielded cable	

Certifications

Option	Description	Code
	Optional ATEX version (see www.dinargeo.com for additional details)	CCATEX-1
	IP69K version for one load cell	IP69KLC

Main options and accessories (for a complete list visit www.diniargeo.com)


Mounting Kits	Material	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code
	Nickel-plated steel	2.500 kg	10	-	KSCB2 (load cell not included)
	Galvanised steel	2.500 kg	-	-	KSBN2 (load cell not included)
	Stainless steel	2.500 kg	10	-	KSBX2 (load cell not included)
	Stainless steel	2.000 kg	-	-	KSB2H
	Stainless steel	3.000 / 5.000 kg	-	-	KSB5H

Feet	Material	Load cell compatibility	Threading	Code
	Stainless steel	For load cells up to 2.500 kg	M12 x 43 mm	SBFI-1
	Stainless steel	For load cells from 3.000 to 5.000 kg	M20 x 46,5 mm	SBFI3K-1
	Stainless steel	For load cells up to 2.500 kg	M12 x 45 mm	KSB2FI-1
	Stainless steel	For load cells from 3.000 to 5.000 kg	M20 x 45 mm	KSB5FI-1
	Nickel-plated steel	For load cells up to 2.500 kg	M12 x 45 mm	SBFA

Bushes	Material	Foot compatibility	Threading	Code
	Stainless steel	M12 bush	M12 x 25 mm	BLKM12I
	Stainless steel	M20 bush	M12 x 26 mm	BLKM20I

Joints	Material	Description	Threading	Code
	Stainless steel / Rubber	Elastic joint for load cells up to 2.500 kg	M12 x 32 mm	AVM12
	Stainless steel	Ball joint perfect to improve weighing performance	M12 x 32 mm	SBJ12

Base plates	Material	Description	Hole size	Code
	Stainless steel	Thickness for load cells up to 2.500 kg. Size (l x w x h): 55 x 30 x 5 mm.	N° 2 x 13 mm	BPSB5
	Stainless steel	Thickness for load cells up to 2.500 kg. Size (l x w x h): 55 x 30 x 3 mm.	N° 2 x 13 mm	BPSB3
	Stainless steel	Thickness for load cells from 3.000 to 4.500 kg. Size (l x w x h): 70 x 40 x 5 mm.	N° 2 x 20 mm	BPSBX5

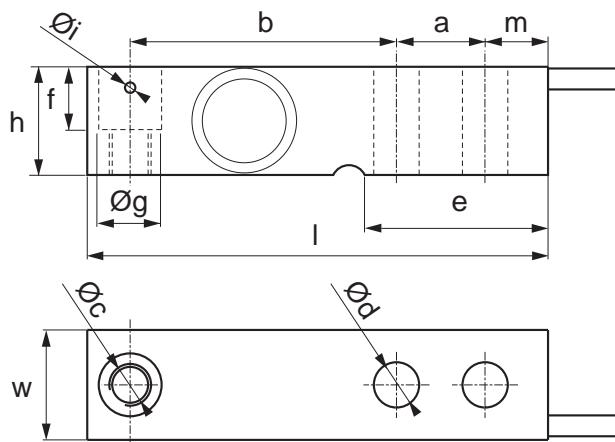SBK C6 | SHEAR BEAM

Version codes

Max (kg)	l (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c Ø (mm)	d Ø (mm)	e (mm)	f (mm)	g (mm)	i (mm)	m (mm)	Code	
500													SBK500C6	
1.000	132	31,5	31	25,4	76,2	N°1 x M12	N°2 x 13	52,5	18	18	3	18	SBK1000C6	
2.000													SBK2000C6	

ATEX certification

Option	Description	Code
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1

Technical features

Maximum number of verification intervals	nLC = 6.000
Maximum capacity	2.000 kg
Y value	Vmin = EMax / 15.000
Nominal rated output	2 mV/V ± 0,1 %
Temperature effect on full scale output	0,0007 % / °C
Temperature effect on zero	0,0009 % / °C
Hysteresis	-
Non-linearity	-
Creep at nominal load over 30 minutes	0,012 % F.S.
Input resistance	385 ± 20 Ω
Output resistance	350 ± 5 Ω
Nominal range of excitation voltage	5 - 15 Vdc (Atex version 1 - 12 Vdc)
Combined error	0,008 % F.S.
Insulation resistance	> 5.000 MΩ
Zero balance	± 10 % F.S.
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-20 °C / +60 °C
Safe overload	150 % F.S.
Breaking load	200 % F.S.
Nominal displacement	-
Repeatability	-
Shielded cable	

Main options and accessories (for a complete list visit www.diniargeo.com)

Mounting kits	Material	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code
	Nickel-plated steel	2.500 kg	10	-	KSBC2
	Galvanised steel	2.500 kg	-	-	KSBN2
	Stainless steel	2.500 kg	10	-	KSBX2
	Stainless steel	2.000 kg	-	-	KSB2H


Option	Description	Code
	Galvanised stay rod with ball-and-socket joints. Max 100 kN. For proper installation, 2xLNKST are needed.	LNK2635
	Single plate for stay rod. Fitted with fixing screw. For proper installation, LNK2635 and a second LNKST are needed.	LNKST
	Grounded cable for weighing kit. 16 mm ² cable, 13 mm eyelets.	GNDC

This kit is designed to allow the correct functioning of the cells and the requested weighing accuracy, within the limits described into the technical manual.

Foot	Material	Load cell compatibility	Threading	Code
	Stainless steel	For load cells up to 2.500 kg	M12 x 43 mm	SBFI-1
	Stainless steel	For load cells up to 2.500 kg	M12 x 45 mm	KSB2FI-1
	Nickel-plated steel	For load cells up to 2.500 kg	M12 x 45 mm	SBFA
Bushes	Material	Foot compatibility	Threading	Code
	Stainless steel	M12 bush	M12 x 25 mm	BLKM12I

Joints	Material	Description	Threading	Code
	Stainless steel / Rubber	Elastic joint for load cells up to 2.500 kg	M12 x 32 mm	AVM12
	Stainless steel	Ball joint perfect to improve weighing performance	M12 x 32 mm	SBJ12

Base plates	Material	Description	Hole size	Code
	Stainless steel	Thickness for load cells up to 2.500 kg. Size (l x w x h): 55 x 30 x 5 mm.	N° 2 x 13 mm	BPSB5
	Stainless steel	Thickness for load cells up to 2.500 kg. Size (l x w x h): 55 x 30 x 3 mm.	N° 2 x 13 mm	BPSB3

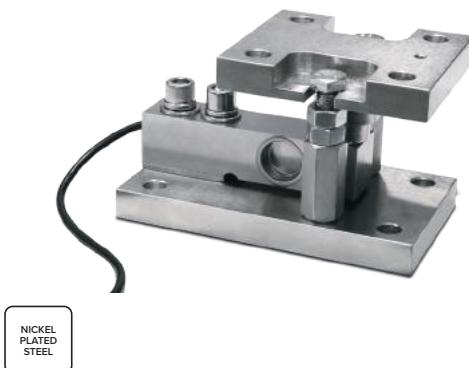KSBC | MOUNTING KIT

Mounting kits for SBT / SBK / SBX series Shear Beam load cells up to 2.500 kg. Suitable for weighing hoppers, tanks and platforms.

Version codes

Mounting kits	Material	Weight (kg)	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code	
	Nickel-plated steel	4,7	Up to 2.500 kg (Load cell capacity)	10	-	KSBC2 (Load cell not included)	

Technical features


Construction in nickel-plated steel
Anti-tipping system
Locking/bypass system for easy transport and maintenance
Higher plate with ball joint, for optimal weighing precision
Overload protection nuts

Main options and accessories (for a complete list visit www.diniargeo.com)

Option	Description	Code	
	Galvanised stay rod with ball-and-socket joints. Max 100 kN. For proper installation, 2xLNKST are needed.	LNK2635	
	Single plate for stay rod. Fitted with fixing screw. For proper installation, LNK2635 and a second LNKST are needed.	LNKST	
	Grounded cable for weighing kit. 16 mm ² cable, 13 mm eyelets.	GNDC	

This kit is designed to allow the correct functioning of the cells and the requested weighing accuracy, within the limits described into the technical manual.

Technical drawing (mm)

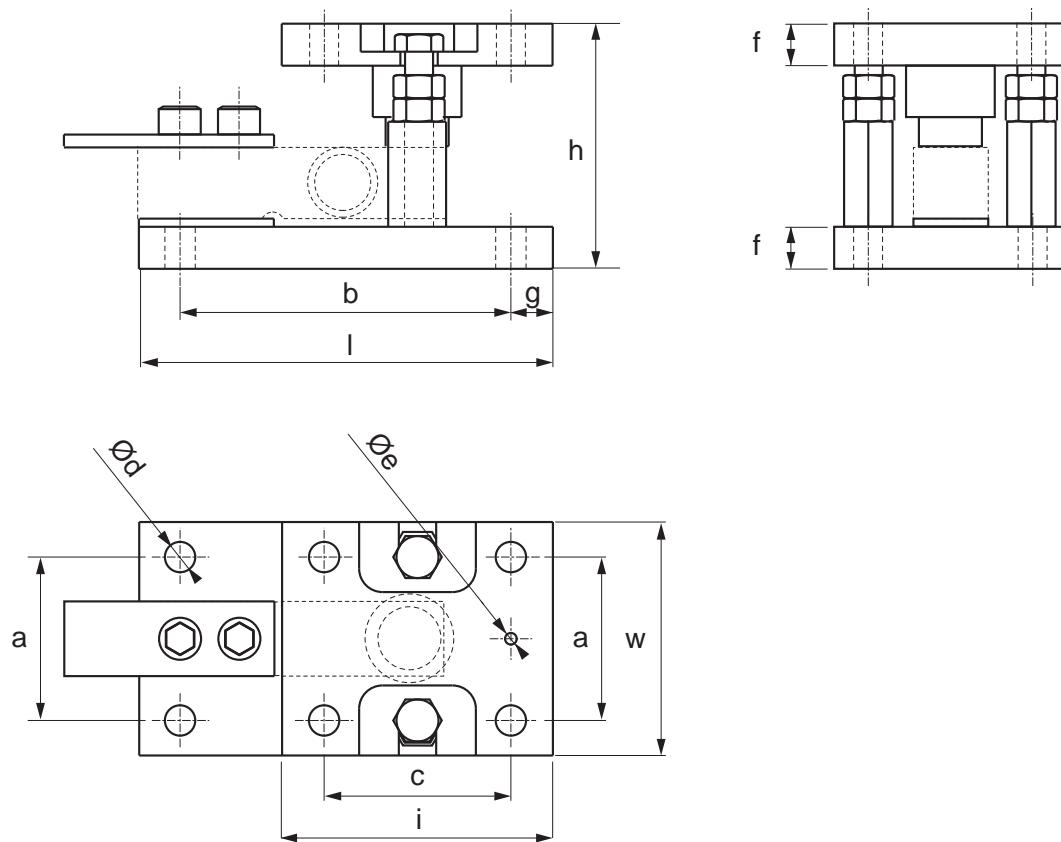

Max (kg)	I (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c (mm)	d Ø (mm)	e Ø (mm)	f (mm)	g (mm)	i (mm)	Code
2.500	175	100	105	70	140	80	N°8 x 13	N°2 x 5	18	17,5	116	KSBC2

KSBN | MOUNTING KIT

Mounting kits for SBX / SBK series Shear Beam load cells up to 2.500 kg. Suitable for weighing hoppers, tanks and platforms.

Version codes

Mounting kits	Material	Weigh (kg)	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code	
	Galvanised steel	5,2	Up to 2.500 kg (Load cell capacity)	-	-	KSBN2 (Load cell not included)	

ATEX certification

Option	Description	Code	
	ATEX declaration for the PLATFORM / LOAD CELL ASSEMBLY KIT (for load cell ATEX declaration see CCATEX code). Option to be offered only if the platform is ordered without the indicator, otherwise refer to the available certifications for the chosen weight indicator.	DCATEXMECH	

Technical features


Construction in galvanised steel
Height adjustment for correct leveling
Mechanical compensation of thermal swellings and transversal forces
Upper plate with ball joint for excellent measuring accuracy
ATEX version available for zones 1&21, 2&22

Main options and accessories (for a complete list visit www.diniargeo.com)

Option	Description	Code	
	Galvanised stay rod with ball-and-socket joints. Max 100 kN. For proper installation, 2xLNKST are needed.	LNK2635	
	Single plate for stay rod. Fitted with fixing screw. For proper installation, LNK2635 and a second LNKST are needed.	LNKST	
	Grounded cable for weighing kit. 16 mm ² cable, 13 mm eyelets.	GNDC	

This kit is designed to allow the correct functioning of the cells and the requested weighing accuracy, within the limits described into the technical manual.

Technical drawing (mm)

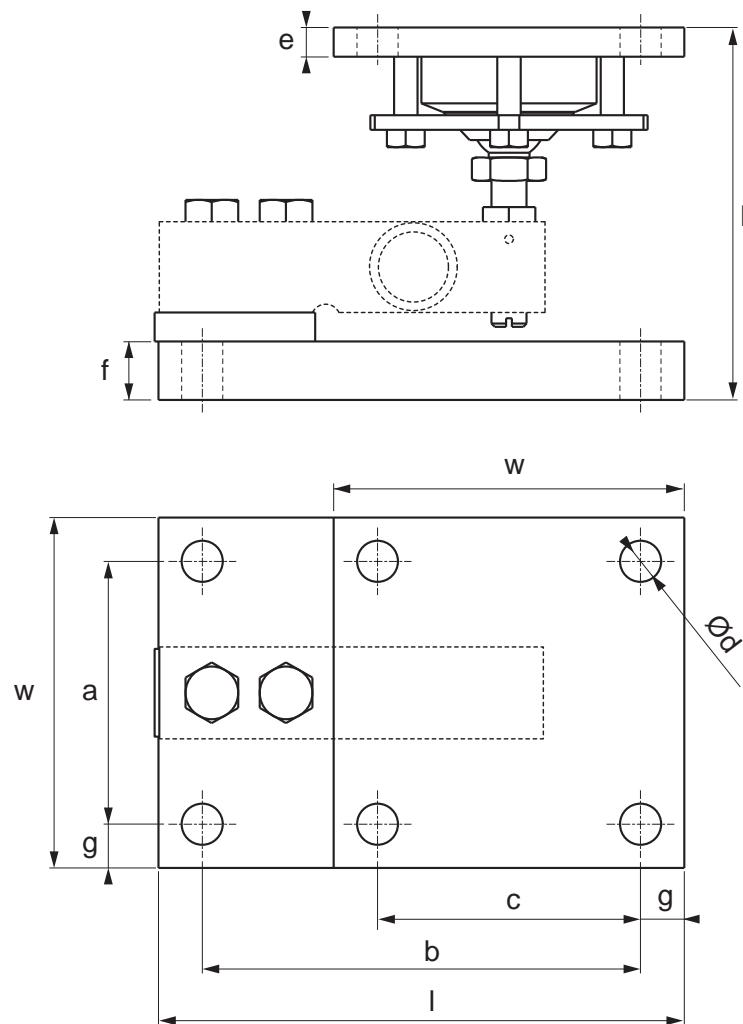

Max (kg)	l (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c (mm)	d Ø (mm)	e (mm)	f (mm)	g (mm)	Code
2.500	180	120	127,5	90	150	90	N°8 x 14	10	20	15	KSBN2

KSBX | MOUNTING KIT



Mounting kits for SBT / SBX / SBK series Shear Beam load cells up to 2.500 kg. Suitable for weighing hoppers, tanks and platforms.

Version codes

Mounting kits	Material	Weight (kg)	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code	
	Stainless steel	4,7	Up to 2.500 kg (Load cell capacity)	10	-	KS BX2 (Load cell not included)	

ATEX certification

Option	Description	Code	
	ATEX declaration for the PLATFORM / LOAD CELL ASSEMBLY KIT (for load cell ATEX declaration see CCATEX code). Option to be offered only if the platform is ordered without the indicator, otherwise refer to the available certifications for the chosen weight indicator.	DCATEXMECH	

Technical features

Construction in stainless steel AISI 304, with electropolished finishing, for better resistance to external agents

Anti-tipping system

Locking/bypass system for easy transport and maintenance

Overload protection nut

Higher plate with configurable system "lock, "side" or "free"

Height regulation for a correct levelling of the structure

Oscillating joint

Simplified base fixing with 3 holes, or complete with 4 holes


ATEX version available, for zones 1&21, 2&22

Main options and accessories (for a complete list visit www.diniargeo.com)

Option	Description	Code	
	Galvanised stay rod with ball-and-socket joints. Max 100 kN. For proper installation, 2xLNKST are needed.	LNK2635	
	Single plate for stay rod. Fitted with fixing screw. For proper installation, LNK2635 and a second LNKST are needed.	LNKST	
	Grounded cable for weighing kit. 16 mm ² cable, 13 mm eyelets.	GNDC	


This kit is designed to allow the correct functioning of the cells and the requested weighing accuracy, within the limits described into the technical manual.

Technical drawing (mm)

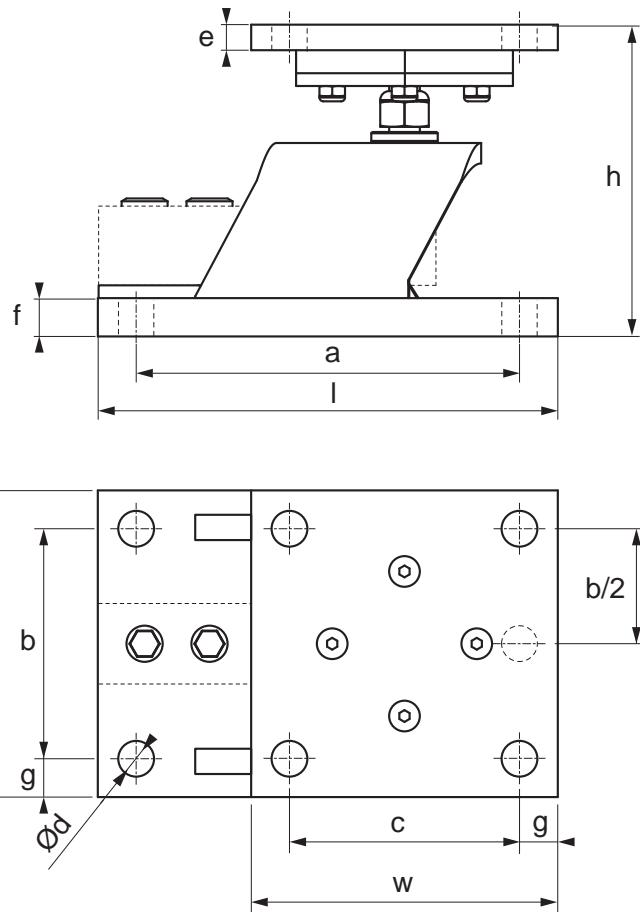

Max (kg)	l (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c (mm)	$d \varnothing$ (mm)	e (mm)	f (mm)	g (mm)	Code
2.500	180	120	122	150	90	90	N°9 x 14	10	15	15	KSBX2

RSBT | DOUBLE SHEAR BEAM

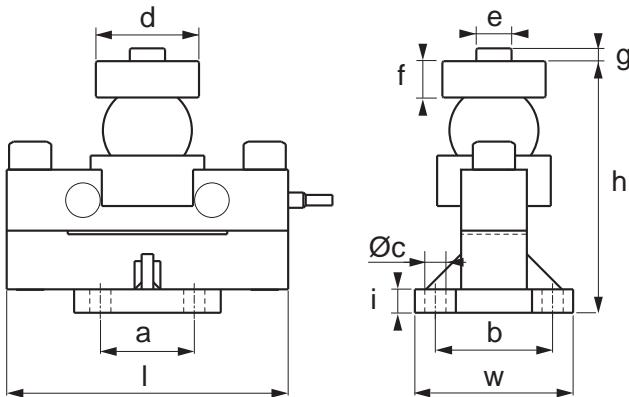

Version codes

Max (kg)	l (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c Ø (mm)	d Ø (mm)	e Ø (mm)	f (mm)	g (mm)	i (mm)	Code	
25.000	240	135	225,5	80	100	N°4 x 18	86	28	29	11	20	RSBT25C3	
30.000												RSBT30C3	
40.000	240	135	225,5	80	100	N°4 x 18	86	28	29	11	20	RSBT40C3	

ATEX certification

Option	Description	Code	
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1	

Technical features

Maximum number of verification intervals	nLC = 3.000
Maximum capacity	40.000 kg
Y value	Vmin = EMax / 10.000
Nominal rated output	2 mV/V ± 0,2 %
Temperature effect on full scale output	0,0014 % / °C
Temperature effect on the zero	± 0,0017 % / °C
Creep at nominal load over 30 minutes	0,02 % F.S.
Input resistance	750 Ω
Output resistance	700 ± 7 Ω
Nominal range of excitation voltage	5 - 18 Vdc
Insulation resistance	> 5.000 MΩ
Zero balance	± 1,5 % F.S.
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-35 °C / +65 °C
Safe overload	> 150 % F.S.
Breaking load	300 % F.S.
Shielded cable	

DSBI | DOUBLE SHEAR BEAM

Version codes

Max (kg)	I (mm)	W (mm)	h (mm)	a (mm)	b Ø (mm)	c Ø (mm)	d (mm)	Code	
10.000								DSBI10	
20.000	170	49,2	49,2	142	N°2 x 20	25,4	12,7	DSBI20	
30.000								DSBI30	

ATEX certification

Option	Description	Code
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1

Technical features

Maximum number of verification intervals	nLC = 4.000
Maximum capacity	30.000 kg
Y value	Vmin = EMax / 10.000
Nominal rated output	2 mV/V ± 0,1 %
Temperature effect on full scale output	0,00097 % / °C
Temperature effect on the zero	0,00116 % / °C
Hysteresis	± 0,015 % F.S.
Non-linearity	± 0,015 % F.S.
Creep at nominal load over 4 hours	< 0,02 % F.S.
Input resistance	700 ± 10 Ω
Output resistance	700 ± 10 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Insulation resistance	> 5.000 MΩ
Zero balance	± 2 % F.S.
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-30 °C / +85 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Shielded cable	

Main options and accessories (for a complete list visit www.diniargeo.com)

Mounting kits	Material	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code
	Stainless steel	Up to 30.000 kg	-	-	KDSBN (Load cell not included)

KDSBN | MOUNTING KIT

Mounting kits for DSBI series Double Shear Beam load cells up to 30.000 kg. Suitable for weighing large capacity hoppers, tanks and silos.

Version codes

Mounting kits	Material	Weight (kg)	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code	
	Stainless steel	7,3	Up to 30.000 kg (Load cell capacity)	-	-	KDSBN (Load cell not included)	

ATEX certification

Option	Description	Code	
	ATEX declaration for the PLATFORM / LOAD CELL ASSEMBLY KIT (for load cell ATEX declaration see CCATEX code). Option to be offered only if the platform is ordered without the indicator, otherwise refer to the available certifications for the chosen weight indicator.	DCATEXMECH	

Technical features


Construction in stainless steel AISI 304	
Anti-tipping system	
Locking/bypass system for easy transport and maintenance	
Overload protection nuts	
Centering plate/electrostatic bypass	
Great resistance to lateral forces	
Locking nuts to maintain the raised position simplify the installation and the removal of the load cell	
ATEX version available for zones 1&21, 2&22	

Main options and accessories (for a complete list visit www.diniargeo.com)

Option	Description	Code	
	Galvanised stay rod with ball-and-socket joints. Max 100 kN. For proper installation, 2xLNKST are needed.	LNK2635	
	Single plate for stay rod. Fitted with fixing screw. For proper installation, LNK2635 and a second LNKST are needed.	LNKST	
	Grounded cable for weighing kit. 16 mm ² cable, 13 mm eyelets.	GNDC	


This kit is designed to allow the correct functioning of the cells and the requested weighing accuracy, within the limits described into the technical manual.

Technical drawing (mm)

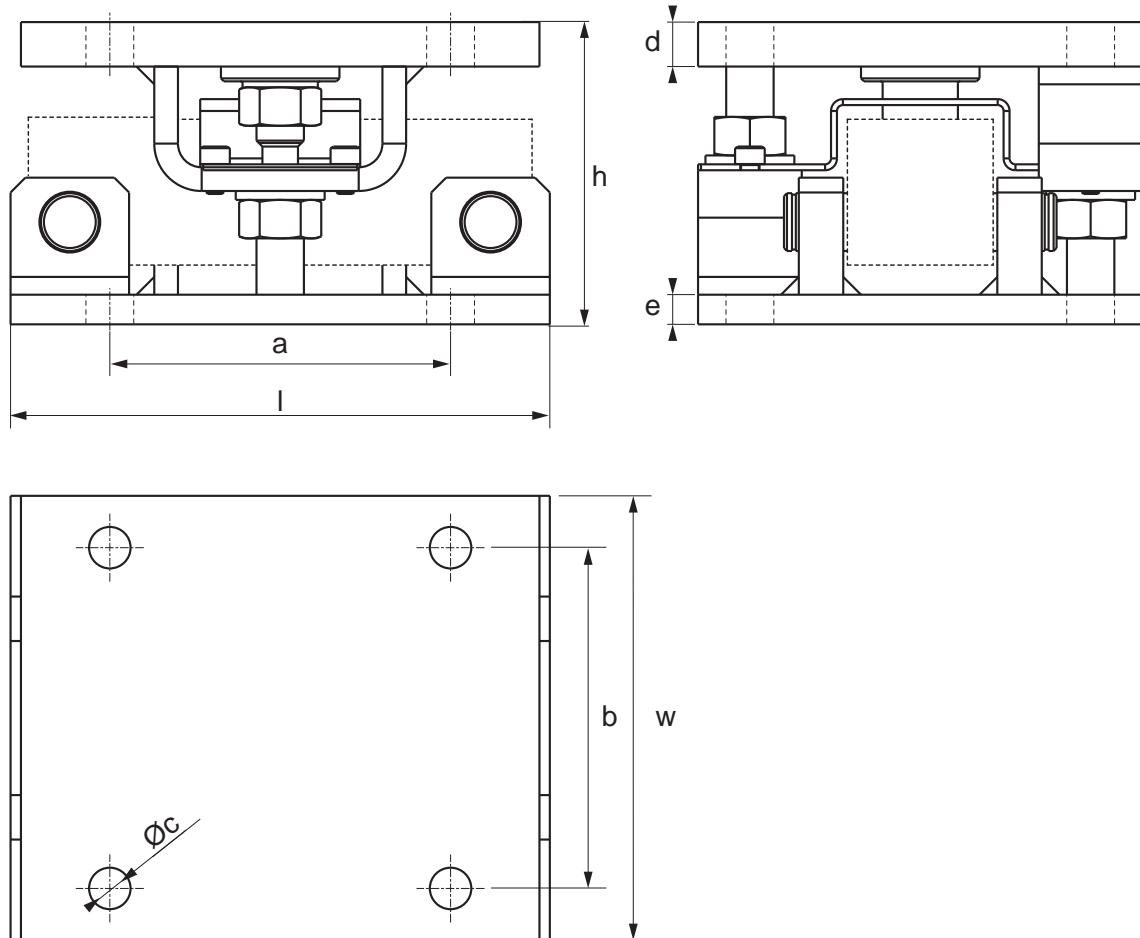

Max (kg)	l (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c Ø (mm)	d (mm)	e (mm)	Code
30.000	182	150	102	115	115	Nº8 x 14	15	10	KDSBN

STU 1K | TENSION

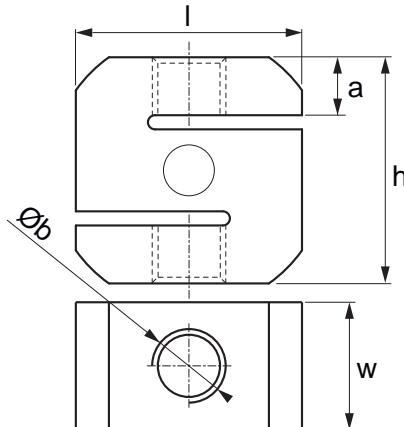

Version codes

Max (kg)	l (mm)	w (mm)	h (mm)	a (mm)	b Ø (mm)	Code	
2.000	80	45	80	20,5	N°2 x M16	STU2000-1KD	OIML R60
5.000						STU5000-1KD	OIML R60
8.000	80	45	80	20,5	N°2 x M24	STU8000-1KD	OIML R60
10.000	80	52	80	20,5	N°2 x M24	STU10000-1KD	OIML R60

Technical features



Maximum number of verification intervals	nLC = 3.000
Maximum capacity	10.000 kg
Y value	-
Nominal rated output	2 mV/V ± 0,1 %
Temperature effect on full scale output	0,02 % F.S. / 10°C
Temperature effect on zero	0,02 % F.S. / 10°C
Hysteresis	± 0,03 % F.S.
Non-linearity	± 0,03 % F.S.
Creep at nominal load over 30 minutes	± 0,03 % F.S.
Input resistance	1000 ± 20 Ω
Output resistance	1000 ± 20 Ω (Compression) / ± 5 Ω (Tension)
Nominal range of excitation voltage	5 - 15 Vdc
Insulation resistance	> 5.000 MΩ
Zero balance	± 1 % F.S.
Compensated temperature range	-10 °C / +50 °C
Operating temperature range	-20 °C / +60 °C
Safe overload	120 % F.S.
Breaking load	300 % F.S.
Repeatability	± 0,02 % F.S.
Shielded cable	


Main options and accessories (for a complete list visit www.diniargeo.com)

Option	Description	Threading	Code
	M16 articulated rod-end ball joint. Maximum lifting capacity 2.000 kg.	M16	RBJM16
	M16 clevis fitted with pin, to be combined with RBJM16.	M16	CLVM16

Code	d (mm)	g (mm)	l ₁ (mm) min.	d ₂ (mm)	h (mm)	l ₂ (mm)	b (mm)
RBJM16	17	M16	36	46	69	92	14

Code	d ₁ (mm)	g (mm)	a ₁ (mm)	a ₂ (mm)	b ₁ (mm)	d ₂ (mm)	d ₃ (mm)	l ₁ (mm)	l ₂ (mm)	l ₂ (mm) max. var.
CLVM16	16	32	32	32	12	M16	26	83	64	0,4

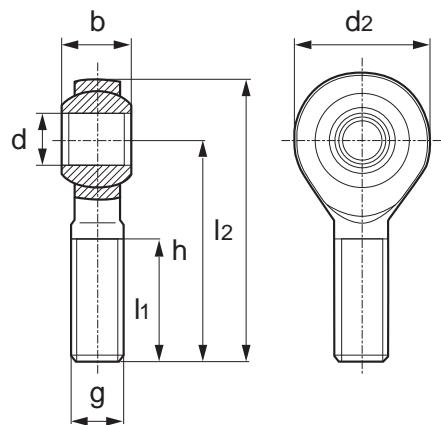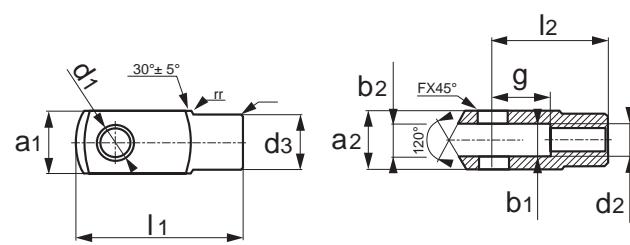**RBJ****CLV**

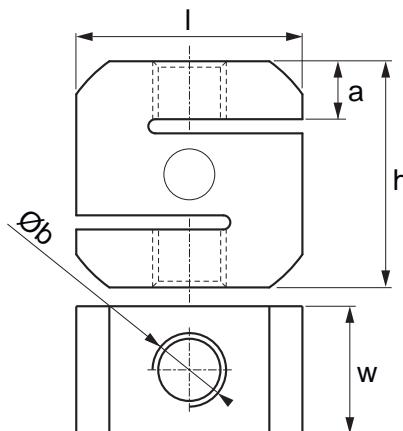STFC | TENSION**Version codes**

Max (kg)	l (mm)	w (mm)	h (mm)	a Ø (mm)	b Ø (mm)	Code	
2.000	80	42	80	20	N°2 x M16	STFC2000	OIML R60
5.000	80	42	80	20	N°2 x M24	STFC5000	OIML R60
10.000	80	52	80	20	N°2 x M24	STFC10000	OIML R60

ATEX certification

Option	Description	Code	
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1	

Technical features


Maximum number of verification intervals	nLC = 3.000
Maximum capacity	10.000 kg
Y value	Vmin = EMax / 10.000
Nominal rated output	2 mV/V ± 0,1 %
Temperature effect on full scale output	0,02 % / °C
Temperature effect on zero	0,02 % / °C
Hysteresis	± 0,02 % F.S.
Non-linearity	± 0,02 % F.S.
Creep at nominal load over 4 hours	0,03 % F.S.
Input resistance	1.000 ± 110 Ω
Output resistance	1.000 ± 10 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Insulation resistance	> 5.000 MΩ
Zero balance	± 2 % F.S.
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-30 °C / +85 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Repeatability	0,01 % F.S.
Shielded cable	

Main options and accessories (for a complete list visit www.diniargeo.com)


Option	Description	Threading	Code
	M16 articulated rod-end ball joint. Maximum lifting capacity 2.000 kg.	M16	RBJM16
	M16 clevis fitted with pin, to be combined with RBJM16.	M16	CLVM16
	M24 articulated rod-end ball joint. Maximum lifting capacity 5.000 kg.	M24	RBJM24
	M24 clevis fitted with pin, to be combined with RBJM24.	M24	CLVM24

Code	d (mm)	g (mm)	l ₁ (mm) min.	d ₂ (mm)	h (mm)	l ₂ (mm)	b (mm)
RBJM16	17	M16	36	46	69	92	14
RBJM24	25	M24	53	64	94	126	20


Code	d ₁ (mm)	g (mm)	a ₁ (mm)	a ₂ (mm)	b ₁ (mm)	d ₂ (mm)	d ₃ (mm)	l ₁ (mm)	l ₂ (mm)	l ₂ (mm) max. var.
CLVM16	16	32	32	32	12	M16	26	83	64	0,4
CLVM24	25	50	50	50	25	M24	42	132	100	0,4

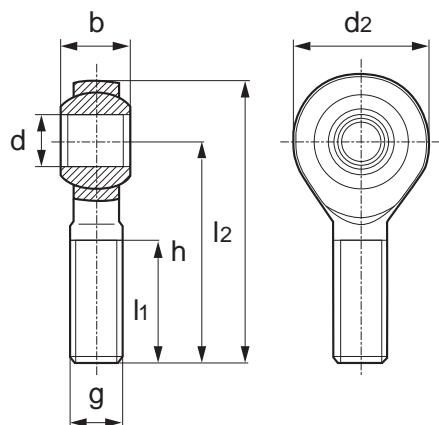

RBJ

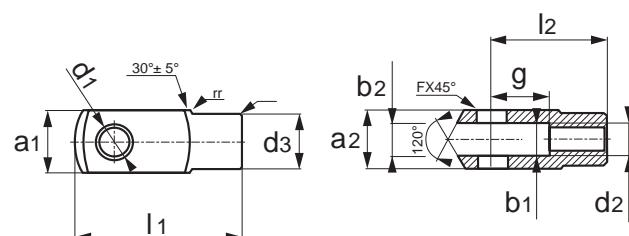


CLV

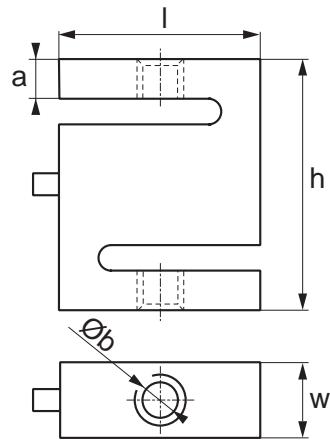SL | TENSION**Version codes**

Max (kg)	l (mm)	w (mm)	h (mm)	a (mm)	b Ø (mm)	Code
15	51	13	64	10,5	N°2 x M8	SL15
30						SL30
50						SL50
100		19	76	13,5	N°2 x M12	SL100
300						SL300
500						SL500
1.000	54	25,4	76	13,5	N°2 x M12	SL1000

Technical features


Maximum number of verification intervals	-
Maximum capacity	1.000 kg
Y value	-
Nominal rated output	2 mV/V ± 10 %
Temperature effect on full scale output	0,02 % / °C
Temperature effect on zero	0,02 % / °C
Hysteresis	0,02 % F.S.
Non-linearity	0,02 % F.S.
Creep at nominal load over 4 hours	0,03 % F.S.
Input resistance	381 ± 10 Ω
Output resistance	350 ± 3 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Insulation resistance	> 5.000 MΩ
Zero balance	± 2 % F.S.
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-30 °C / +85 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Repeatability	0,01 % F.S.
Shielded cable	

Main options and accessories (for a complete list visit www.diniargeo.com)


Option	Description	Threading	Code
	M8 articulated rod-end ball joint. Maximum lifting capacity 600 kg. For load cells up to 50 kg.	M8	RBJM8
	M8 clevis fitted with pin, to be combined with RBJM8. For load cells up to 50 kg.	M8	CLVM8
	M12 articulated rod-end ball joint. Maximum lifting capacity 1.000 kg. For load cells from 100 to 1.000 kg.	M12	RBJM12
	M12 clevis fitted with pin, to be combined with RBJM12. For load cells from 100 to 1.000 kg.	M12	CLVM12

Code	d (mm)	g (mm)	l ₁ (mm) min.	d ₂ (mm)	h (mm)	l ₂ (mm)	b (mm)
RBJM8	8	M8	22	24	42	54	8
RBJM12	12	M12	28	34	54	71	10

Code	d ₁ (mm)	g (mm)	a ₁ (mm)	a ₂ (mm)	b ₁ (mm)	d ₂ (mm)	d ₃ (mm)	l ₁ (mm)	l ₂ (mm)	l ₂ (mm) max. var.
CLVM8	8	16	16	16	8	M8	14	42	32	0,4
CLVM12	12	24	24	24	12	M12	20	62	48	0,4

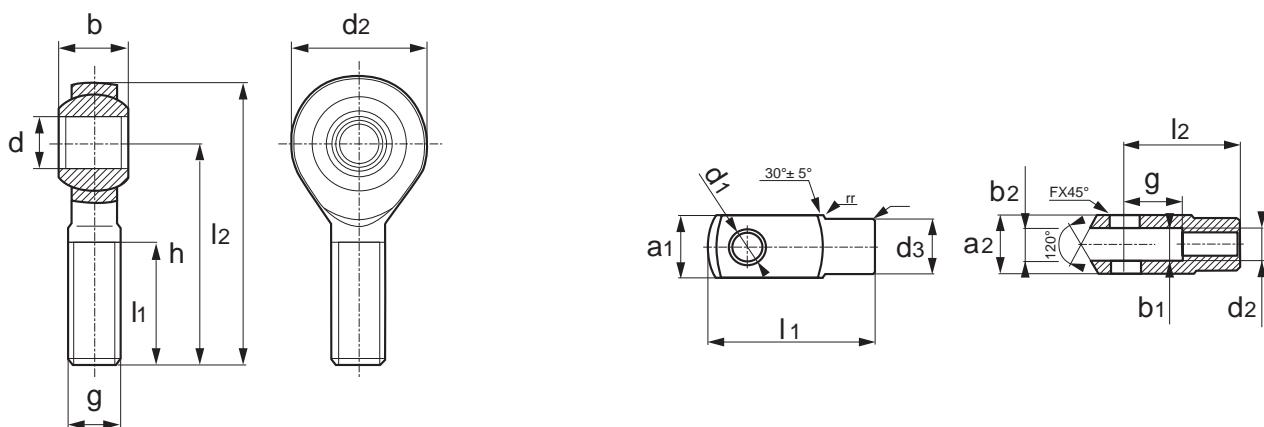**RBJ****CLV**

CPX | COMPRESSION

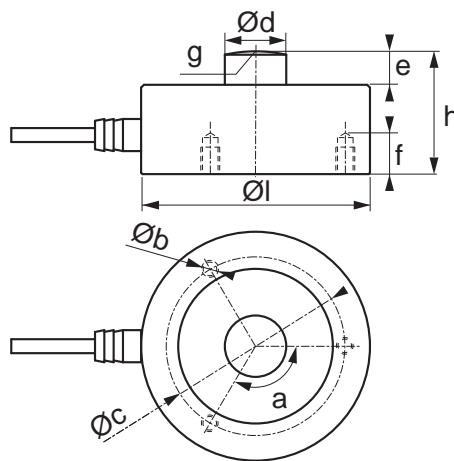

Version codes

	Max (kg)	I Ø (mm)	h (mm)	a (°)	b Ø (mm)	c Ø (mm)	d Ø (mm)	e (mm)	f (mm)	g (mm)	Code	
SHEAR BEAM	250	82	44	120°	3 x M8	68	22	12	21	R120	CPX250	
	500										CPX500	
	1.000										CPX1000	
	2.500										CPX2500	OIML R60
	5.000										CPX5000	OIML R60
	7.500										CPX7500	OIML R60
	10.000										CPX10000	OIML R60
	12.500										CPX12500	OIML R60
DOUBLE SHEAR BEAM	15.000	100	48,5	120°	3 x M10	80	28	13,5	24	R120	CPX15000	
	30.000	126	54	120°	3 x M12	90	35	14	30	R120	CPX30000	
	50.000	165	80	120°	3 x M16	130	60	20	28	R300	CPX50000	
	100.000										CPX100000	
	Up to 1.000.000	-	-	-	-	-	-	-	-	-	Upon request	

Technical features

Maximum number of verification intervals	nLC = 3.000
Maximum capacity	100.000 kg
Y value	Vmin = EMax / 10.000
Nominal rated output	2 mV/V ± 0,5 %
Temperature effect on full scale output	0,02 % / 10 °C
Temperature effect on zero	0,02 % / 10 °C
Hysteresis	0,05 % F.S.
Non-linearity	0,05 % F.S.
Creep at nominal load over 30 minutes	0,02 % F.S.
Input resistance	750 ± 10 Ω
Output resistance	700 ± 5 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Insulation resistance	> 5.000 MΩ
Zero balance	± 1 % F.S.
Compensated temperature range	-10 °C / +50 °C
Operating temperature range	-20 °C / +60 °C
Safe overload	120 % F.S.
Breaking load	300 % F.S.
Repeatability	0,02 % F.S.
CPX 250 ... 5.000 kg: CPX 7.500 ... 100.000 kg:	
Shielded cable	

ATEX certification

Option	Description	Code
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1
	IP69K version for one load cell	IP69KLC


Main options and accessories (for a complete list visit www.diniargeo.com)

Mounting kits	Material	UNI CE 1090	Max load cell capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code
	Nickel-plated steel	-	Up to 12.500 kg	45	25	KCPN10A (Load cell not included)
	Stainless steel	-	Up to 12.500 kg	45	25	KCPN10 (Load cell not included)
	Stainless steel	●	Up to 12.500 kg	45	25	KCPN10PRO (Load cell not included)
	Stainless steel	-	15.000 kg	45	25	KCPN15 (Load cell not included)
	Stainless steel	-	30.000 kg	45	30	KCPN30 (Load cell not included)
	Zinc-plated steel	●	30.000 kg	130	100	KCP50 (Load cell not included)
	Zinc-plated steel	●	50.000 / 100.000 kg	400	200	KCP100H (Load cell not included)
			Up to 1.000.000 kg	-	-	Upon request

Option	Description	Code
	Galvanised stay rod with ball-and-socket joints. Max 100 kN. For proper installation, 2xLNKST are needed.	LNK2635
	Single plate for stay rod. Fitted with fixing screw. For proper installation, LNK2635 and a second LNKST are needed.	LNKST
	Grounded cable for weighing kit. 16 mm ² cable, 13 mm eyelets.	GNDC

This kit is designed to allow the correct functioning of the cells and the requested weighing accuracy, within the limits described into the technical manual.

- As standard

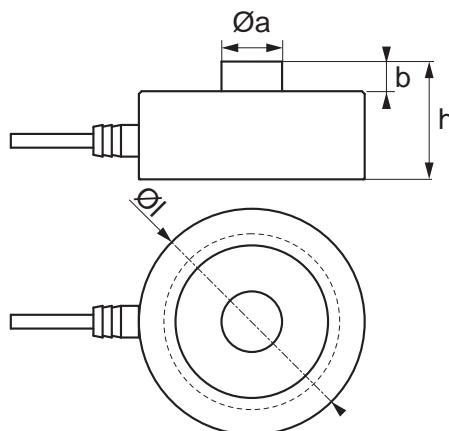CPA | COMPRESSION

Version codes

Max (kg)	I Ø (mm)	h (mm)	a Ø (mm)	b (mm)	Code	
150	82	44	22	12	CPA150	
300					CPA300	
500					CPA500	
1.000					CPA1000	
2.000					CPA2000	
3.000					CPA3000	
5.000					CPA5000	
7.000					CPA7000	
10.000					CPA10000	
20.000					CPA20000	
30.000	128	54	35	14	CPA30000	
50.000					CPA50000	
Up to 1.000.000	-	-	-	-	Upon request	

Technical features

Maximum number of verification intervals	nLC = 3.000
Maximum capacity	50.000 kg
Y value	Vmin = EMax / 10.000
Nominal rated output	2 mV/V ± 0,1 %
Temperature effect on full scale output	0,0013 % / °C
Temperature effect on zero	0,001 % / °C
Hysteresis	0,015 % F.S.
Non-linearity	0,025 % F.S.
Creep at nominal load over 4 hours	0,03 % F.S.
Input resistance	1100 ± 50 Ω
Output resistance	1000 ± 10 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	-
Insulation resistance	> 5.000 MΩ
Zero balance	± 2 % F.S.
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-30 °C / +85 °C (* Upon request up to 200 °C)
Storage temperature range	-30 °C / +90 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Repeatability	0,01 % F.S.
Shielded cable	CPA 150 ... 10.000 kg: CPA 20.000 ... 50.000 kg:

ATEX certification

Option	Description	Code
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1


Main options and accessories (for a complete list visit www.diniargeo.com)

Option	Description	Code
	Option for high temperatures with compensation up to 200°C and specific cable (for single load cell)	CPAHT
	Option for high temperatures with compensation up to 85°C and standard cable (for single load cell)	CPAHTL

Mounting kits	Material	UNI EN 1090	Max load cell capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code
	Nickel-plated steel	-	Up to 10.000 kg	45	25	KCPN10A (Load cell not included)
	Stainless steel	-	Up to 10.000 kg	45	25	KCPN10 (Load cell not included)
	Stainless steel	●	Up to 10.000 kg	45	25	KCPN10PRO (Load cell not included)
	Stainless steel	-	15.000 kg	45	25	KCPN15 (Load cell not included)
	Zinc-plated steel	●	50.000 kg	130	100	KCP50 (Load cell not included)
	Zinc-plated steel	-	CPX - 30.000 CPA - From 20.000 to 50.000	130	100	KCP50-NS (Load cell not included)
	Zinc-plated steel	●	CPX - 30.000 CPA - From 20.000 to 50.000	130	100	KCP50-1090-NS (Load cell not included)
			Up to 1.000.000 kg	-	-	Upon request

- As standard

CPH | COMPRESSION

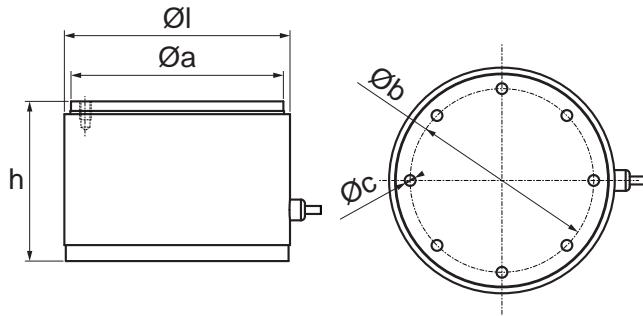

Version codes

	Max (kg)	Ø l (mm)	h (mm)	Ø a (mm)	Ø b (mm)	Ø c (mm)	Code
SHEAR BEAM	50.000	141,3	100	133	115	N°16 x M8	CPH50
	100.000						CPH100
	250.000						CPH250
DOUBLE SHEAR BEAM	500.000	168	100	160,5	115	N°24 x M12	CPH500
	800.000						CPH800
	1.000.000	219	200	210	150	N°24 x M20	CPH1000

Technical features

Maximum number of verification intervals	-
Maximum capacity	1.000.000 kg
Y value	-
Nominal rated output	2 mV/V ± 1 %
Temperature effect on full scale output	0,0013 % / °C
Temperature effect on zero	0,0014% / °C
Hysteresis	0,15 % F.S.
Non-linearity	0,15 % F.S.
Creep at nominal load over 4 hours	0,05% F.S.
Input resistance	1050 ± 20 Ω (from 50.000 to 500.000 kg), 1400 ± 20 Ω (from 800.000 to 1.000.000 kg)
Output resistance	1050 ± 20 Ω (from 50.000 to 500.000 kg), 1400 ± 20 Ω (from 800.000 to 1.000.000 kg)
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	-
Insulation resistance	> 5.000 MΩ
Zero balance	± 2 % F.S.
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-30 °C / +85 °C
Storage temperature range	-30 °C / +90 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Repeatability	0,1 % F.S.
Shielded cable	CPH 50.000 ... 500.000 kg: CPH 800.000 ... 1.000.000 kg:  

Main options and accessories (for a complete list visit www.diniargeo.com)

Mounting kits	Material	Max load cell capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code	
	Stainless steel	Up to 250.000 kg	-	-	KCPXH250 (Load cell not included)	
	Stainless steel	Up to 500.000 kg	-	-	KCPXH500 (Load cell not included)	
	Stainless steel	Up to 800.000 kg	-	-	KCPXH800 (Load cell not included)	
	Stainless steel	Up to 1.000.000 kg	-	-	KCPXH1000 (Load cell not included)	

- As standard
- Optional

KCPNA | MOUNTING KIT



NICKEL PLATED STEEL

Mounting kits for CPX / CPA series Compression load cells up to 12.500 / 10.000 kg. Suitable for weighing silos, tanks and hoppers.

Version codes

Mounting kits	Material	Weight (kg)	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code	
	Nickel-plated steel	5,4	CPX - Up to 12.500 CPA - Up to 10.000	45	25	KCPN10A (Load cell not included)	

Technical features



Construction in nickel-plated steel
Anti-tipping system
Locking/bypass system for easy transport and maintenance
Overload protection nuts
Self-centering connection segment between lower and upper plate
Protection against electrostatic charges
Great resistance to lateral forces
Locking nuts to maintain the raised position simplify the installation and the removal of the load cell
Dummy load cells for liquid weighing

Main options and accessories *(for a complete list visit www.diniargeo.com)*

Option	Description	Code	
	Galvanised stay rod with ball-and-socket joints. Max 100 kN. For proper installation, 2xLNKST are needed.	LNK2635	
	Single plate for stay rod. Fitted with fixing screw. For proper installation, LNK2635 and a second LNKST are needed.	LNKST	
	Grounded cable for weighing kit. 16 mm ² cable, 13 mm eyelets.	GNDC	

This kit is designed to allow the correct functioning of the cells and the requested weighing accuracy, within the limits described into the technical manual.

Technical drawing (mm)

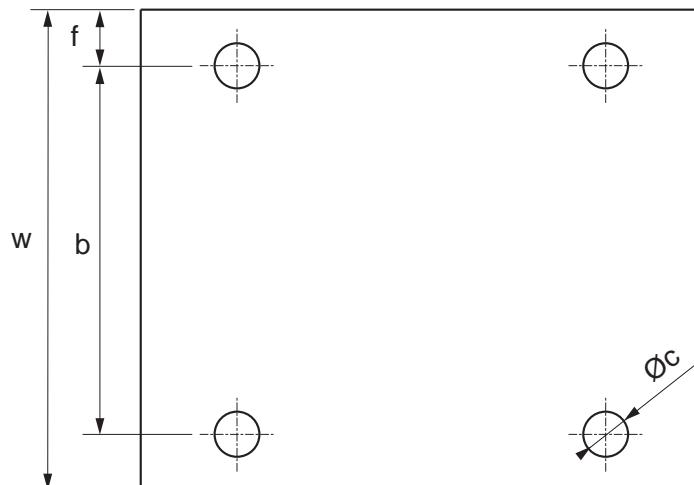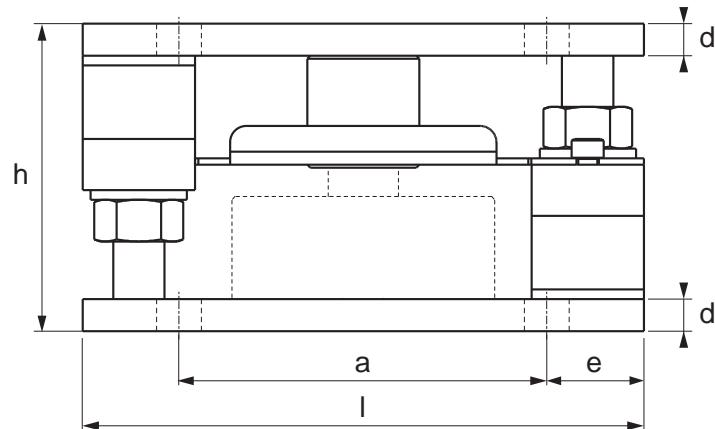

Max (kg)	l (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c Ø (mm)	d (mm)	e (mm)	f (mm)	Code
12.500	175	150	96	115	115	N°8 x 14	10	30	17,5	KCPN10A

KCPN | MOUNTING KIT

Mounting kits for CPX / CPA series Compression load cells up to 100.000 kg. Suitable for weighing large capacity silos, tanks, hoppers.

OFF-CENTER

BENDING BEAM

SHEAR BEAM

DOUBLE SHEAR BEAM

TENSION

COMPRESSION

COLUMN

LOAD PINS

OTHER

Version codes

Mounting kits	Material	UNI EN 1090	Weight (kg)	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code	
	Stainless steel	-	5,4	CPX - Up to 12.500 CPA - Up to 10.000	45	25	KCPN10 (Load cell not included)	
	Stainless steel	●	5,4	CPX - Up to 12.500 CPA - Up to 10.000	45	25	KCPN10PRO (Load cell not included)	
	Stainless steel	-	5,4	CPX - 15.000	45	25	KCPN15 (Load cell not included)	
	Stainless steel	-	9,4	CPX - 30.000	45	30	KCPN30 (Load cell not included)	
	Stainless steel	-	41,6	CPX - From 50.000 to 100.000	90	40	KCPN100 (Load cell not included)	

ATEX certification



Option	Description	Code	
	ATEX declaration for the PLATFORM / LOAD CELL ASSEMBLY KIT (for load cell ATEX declaration see CCATEX code). Option to be offered only if the platform is ordered without the indicator, otherwise refer to the available certifications for the chosen weight indicator.	DCATEXMECH	

Technical features

Construction in stainless steel AISI 304
Anti-tipping system
Locking/bypass system for easy transport and maintenance
Overload protection nuts
Self-centering connection segment between lower and upper plate
Protection against electrostatic discharges
Great resistance to lateral forces
Locking nuts to maintain the raised position simplify the installation and the removal of the load cell
Dummy load cells for liquid weighing
ATEX version available for zones 1&21, 2&22

This kit is designed to allow the correct functioning of the cells and the requested weighing accuracy, within the limits described into the technical manual.

Technical drawing (mm)

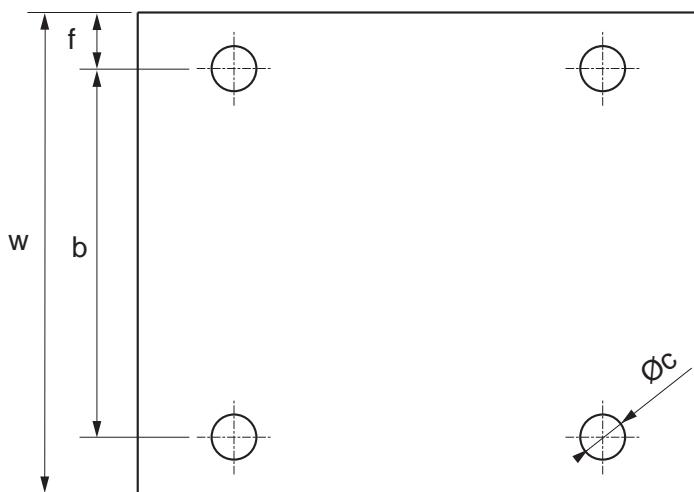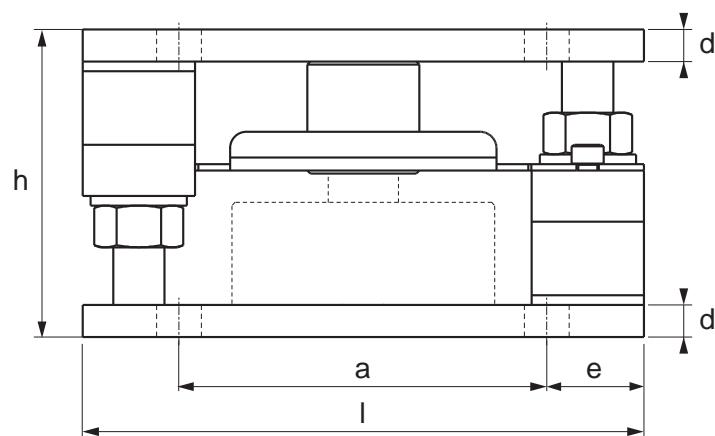

Max (kg)	l (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c Ø (mm)	d (mm)	e (mm)	f (mm)	Code
12.500	175	150	96	115	115	N°8 x 14	10	30	17,5	KCPN10
15.000										KCPN10PRO
30.000	230	200	118	160	160	N°8 x 17	10	30	17,5	KCPN15
100.000	320	320	154	250	250	N°8 x 23	20	35	35	KCPN30
										KCPN100

Main options and accessories (for a complete list visit www.diniargeo.com)

Option	Description	Code
	Galvanised stay rod with ball-and-socket joints. Max 100 kN. For proper installation, 2xLNKST are needed.	LNK2635
	Single plate for stay rod. Fitted with fixing screw. For proper installation, LNK2635 and a second LNKST are needed.	LNKST
	Grounded cable for weighing kit. 16 mm ² cable, 13 mm eyelets.	GNDC

KCP50 | MOUNTING KIT

Mounting kits for 30.000 kg CPX and CPA series Compression load cells from 20.000 kg to 50.000 kg. Suitable for weighing large capacity silos, tanks and hoppers.

Version codes

Mounting kits	Material	Weight (kg)	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	UNI EN 1090	Code	
	Zinc-plated steel	27	50.000 kg	130	100	•	KCP50 (Load cell not included)	
	Zinc-plated steel	27	CPX - 30.000 CPA - From 20.000 to 50.000	130	100	-	KCP50-NS (Load cell not included)	
	Zinc-plated steel	27	CPX - 30.000 CPA - From 20.000 to 50.000	130	100	•	KCP50-1090-NS (Load cell not included)	

ATEX certification

Option	Description	Code	
	ATEX declaration for the PLATFORM / LOAD CELL ASSEMBLY KIT (for load cell ATEX declaration see CCATEX code). Option to be offered only if the platform is ordered without the indicator, otherwise refer to the available certifications for the chosen weight indicator.	DCATEXMECH	

Technical features



Construction in zinc-plated steel	
Anti-tipping system	
Locking/bypass system for easy transport and maintenance	
Overload protection nuts	
Great resistance to lateral forces	
Locking nuts to maintain the raised position simplify the installation and the removal of the load cell	
Dummy load cells for liquid weighing	

Main options and accessories (for a complete list visit www.diniargeo.com)

Option	Description	Code	
	Zinc-plated-steel stay rod with ball-and-socket joints. Max 29 kN.	LNK20	
	Grounded cable for weighing kit. 16 mm ² cable, 13 mm eyelets.	GNDC	

This kit is designed to allow the correct functioning of the cells and the requested weighing accuracy, within the limits described into the technical manual.

Technical drawing (mm)

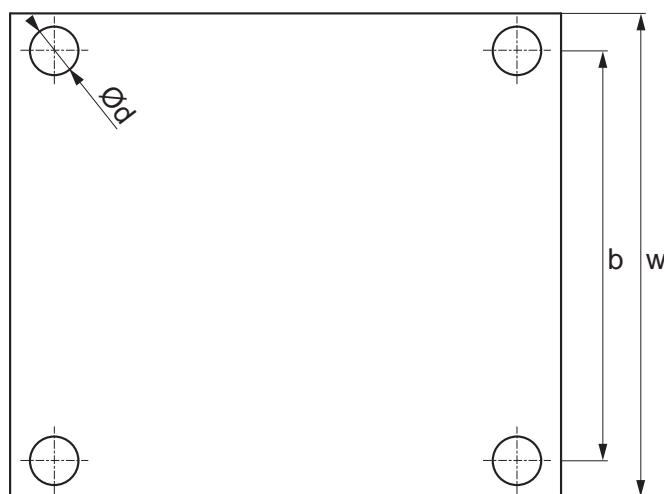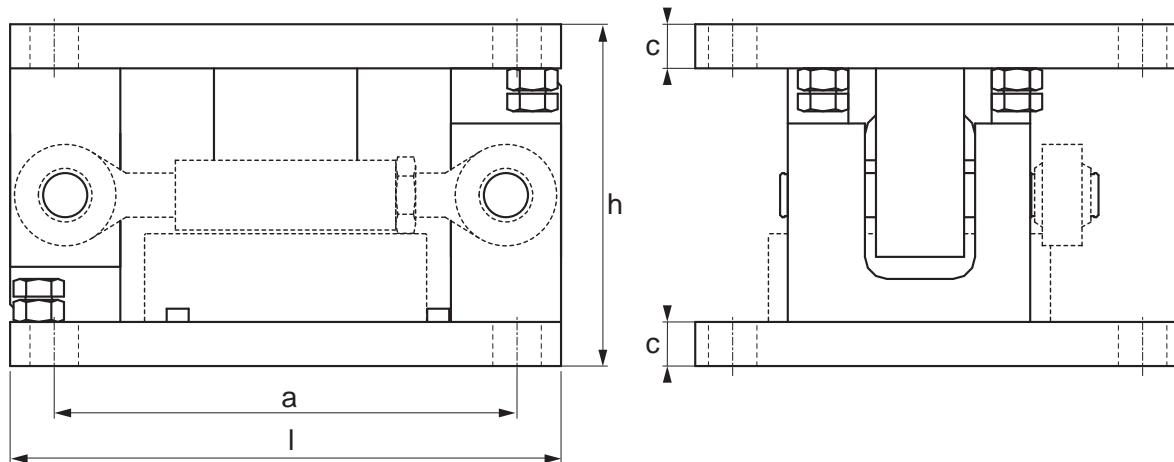

Max (kg)	l (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c (mm)	d Ø (mm)	Code
50.000	250	230	155	210	186	20	22	KCP50

KCP100H | MOUNTING KIT



Mounting kits for CPX series Compression load cells from 50.000 to 100.000 kg. Suitable for weighing large capacity silos, tanks, hoppers.

Version codes

Mounting kits	Material	Weight (kg)	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	UNI EN 1090	Code	
	Zinc-plated steel	90	CPX - From 50.000 to 100.000 kg	400	200	-	KCP100H (Load cell not included)	
	Zinc-plated steel	90	CPX - From 50.000 to 100.000 kg	400	200	•	KCP100H-1090 (Load cell not included)	

Technical features


Construction in zinc-plated steel
Double anti-tipping system
Locking/bypass system for easy transport and maintenance
Overload protection nuts
Great resistance to lateral forces
Locking nuts to maintain the raised position simplify the installation and the removal of the load cell
Stainless steel structure available upon request

Main options and accessories (for a complete list visit www.diniargeo.com)

Option	Description	Code	
	Grounded cable for weighing kit. 16 mm ² cable, 13 mm eyelets.	GNDC	


This kit is designed to allow the correct functioning of the cells and the requested weighing accuracy, within the limits described into the technical manual.

Technical drawing (mm)

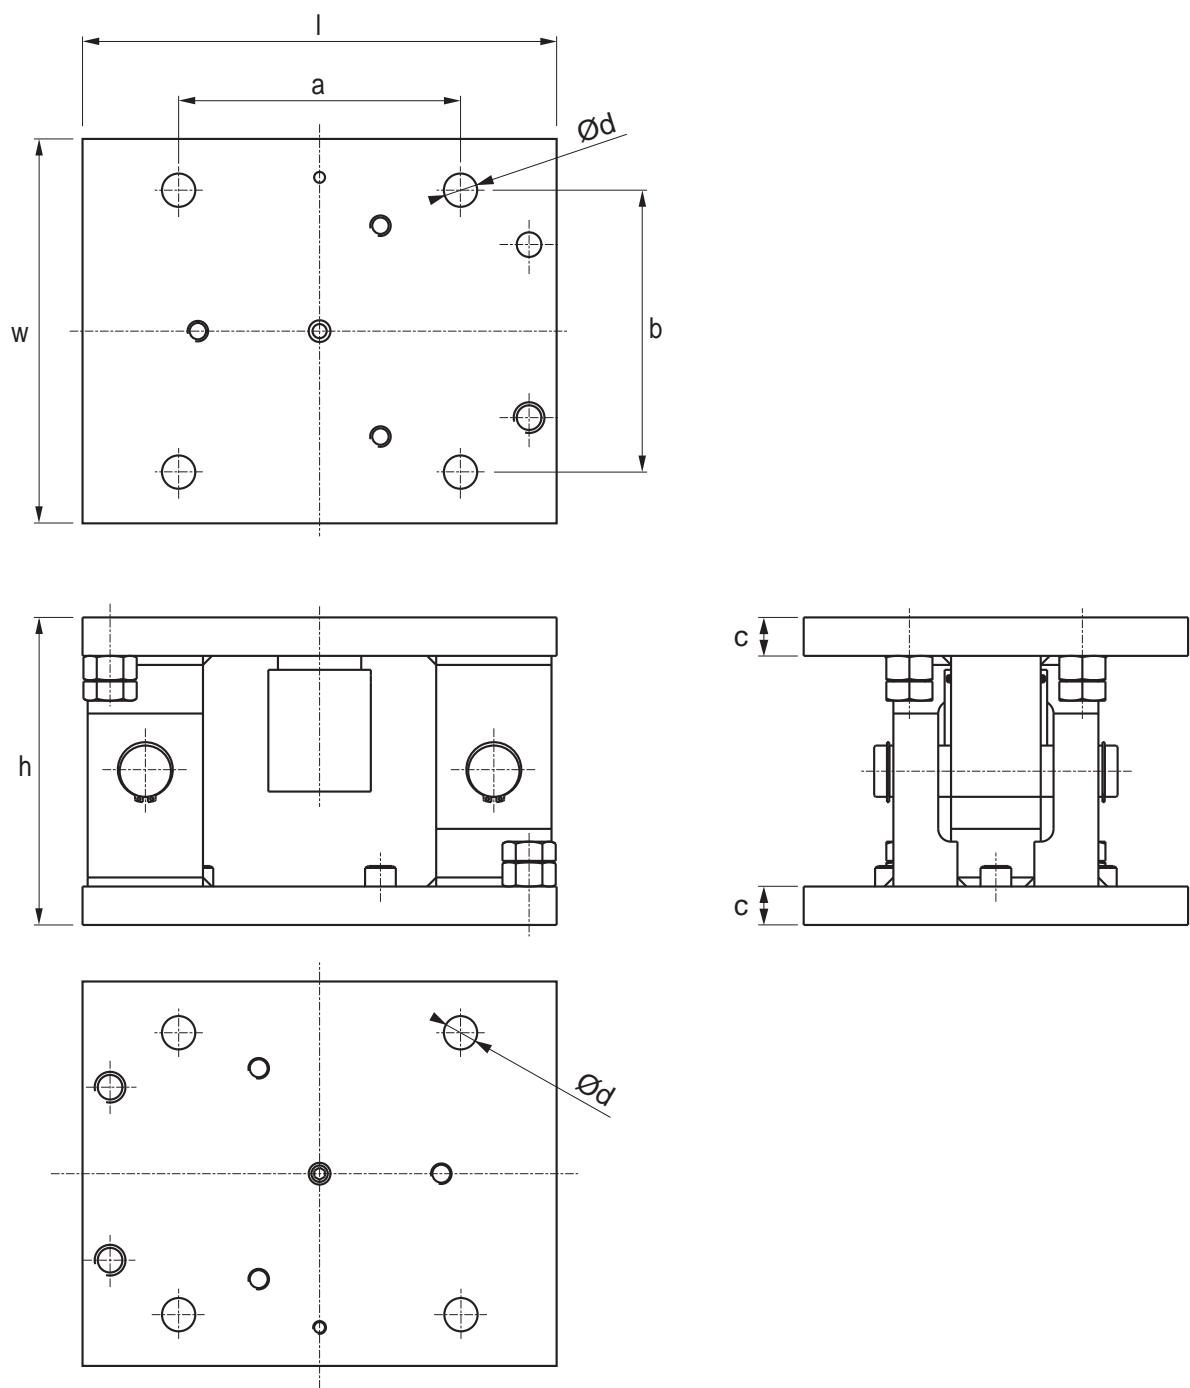

Max (kg)	l (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c (mm)	d Ø (mm)	Code
100.000	370	300	240 / 250	220	220	30	26	KCP100H

RCA | COLUMN

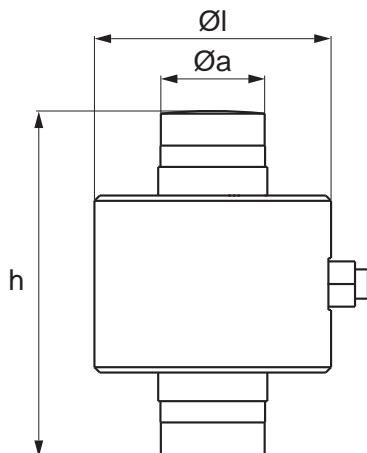

Version codes

Max (kg)	I Ø (mm)	h (mm)	a Ø (mm)	Code	
30.000	88,9	130	39	RCA30C4	

ATEX certification

Option	Description	Code	
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1	


Technical features

Maximum number of verification intervals	nLC = 4.000
Maximum capacity	30.000 kg
Y value	Vmin = EMax / 10.000
Nominal rated output	2 mV/V ± 10 %
Temperature effect on full scale output	± 0,011 % / °C
Temperature effect on zero	± 0,0014 % / °C
Creep at nominal load over 30 minutes	0,018 % F.S.
Input resistance	815 ± 20 Ω
Output resistance	700 ± 0,35 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	± 0,013 % F.S.
Insulation resistance	5.000 MΩ / 50 V
Zero balance	< ± 2,5 % F.S.
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-20 °C / +60 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Shielded cable	

Main options and accessories (for a complete list visit www.diniargeo.com)

Mounting kits	Material	Description	Code	
	Zinc-plated steel	Kit of 2 jointed cups for self-alignment and fixing plate	KRCA	

RL5426 PLUS | COLUMN

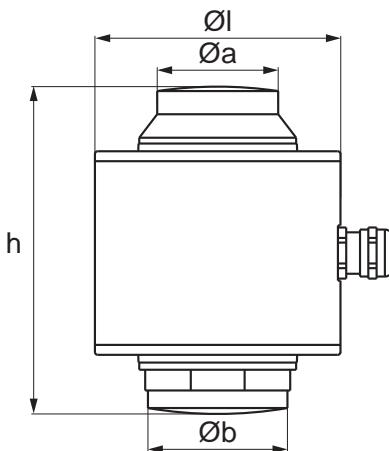

Version codes

Max (kg)	Ø (mm)	h (mm)	Code
20.000			RL5426-20T
30.000			RL5426-30T
40.000			RL5426-40T
50.000			RL5426-50T


Technical features

Maximum number of verification intervals	nLC = 6.000
Maximum capacity	50.000 kg
Y value	Vmin = Emax / 18.000
Nominal rated output	2 mV/V ± 0,0001%
Temperature effect on full scale output	0,008 % F.S. / 10°C
Temperature effect on zero	0,02 % F.S. / 10°C
Creep at nominal load over 30 minutes	0,01 % F.S.
Input resistance	800 ± 3 Ω
Output resistance	700 ± 3 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	0,015 % F.S.
Insulation resistance	> 5.000 MΩ
Zero balance	-
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-35 °C / +70 °C
Storage temperature range	-40 °C / +80 °C
Safe overload	120 % F.S.
Breaking load	300 % F.S.
Shielded cable	 Ø 6 mm l = 20 m

Options & accessories

Mounting kits	Material	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code
	Stainless steel	-	-	-	173798
	Zinc-plated steel	Up to 40.000 (load cell capacity)	82	67	173801

RL5416 | COLUMN

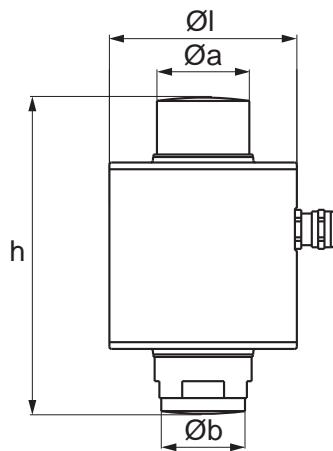

Version codes

Max (kg)	I Ø (mm)	h (mm)	Code
20.000	88,9	150	RL5416-20T OIML R60
30.000			RL5416-30T OIML R60
40.000			RL5416-40T OIML R60
50.000			RL5416-50T OIML R60


Technical features

Maximum number of verification intervals	nLC = 4.000
Maximum capacity	50.000 kg
Y value	Vmin = Emax / 14.000
Nominal rated output	2 mV/V ± 0,05 %
Temperature effect on full scale output	0,01 % F.S. / 10°C
Temperature effect on zero	0,02 % F.S. / 10°C
Creep at nominal load over 30 minutes	0,014 % F.S.
Input resistance	800 ± 5 Ω
Output resistance	700 ± 3 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	0,022 % F.S.
Insulation resistance	> 5.000 MΩ
Zero balance	-
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-35 °C / +70 °C
Storage temperature range	-40 °C / +80 °C
Safe overload	120 % F.S.
Breaking load	300 % F.S.
Shielded cable	

Options & accessories

Mounting kits	Material	Description	Code
	Stainless steel	Kit of 2 jointed cups for self-alignment of the load cells	173793

RCPT | COLUMN

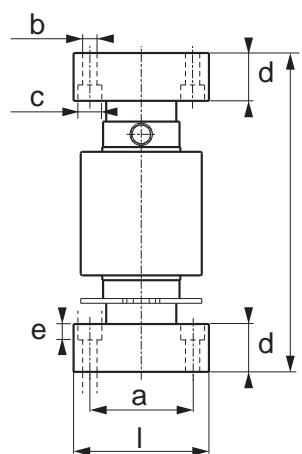

Version codes

Max (kg)	I Ø (mm)	h (mm)	a (mm)	b Ø (mm)	c Ø (mm)	d (mm)	e (mm)	Code
30.000	85	200	64,5	N°4 x 9	N°4 x 15	30	10	RCPT30C3NC*
20.000								RCPT20C3
30.000								RCPT30C3
50.000								RCPT50C3


*NC = version without cups

ATEX certification

Option	Description	Code
	Optional ATEX version (see www.diniargeo.com for additional details)	CCATEX-1

Technical features

Maximum number of verification intervals	nLC = 3.000
Maximum capacity	50.000 kg
Y value	Vmin = EMax / 10.000
Nominal rated output	2 mV/V ± 0,1 %
Temperature effect on full scale output	0,002 % / °C
Temperature effect on zero	0,002 % / °C
Creep at nominal load over 30 minutes	0,02 % F.S.
Input resistance	700 ± 20 Ω
Output resistance	703 ± 7 Ω
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	-
Insulation resistance	> 5.000 MΩ
Zero balance	± 1 % F.S.
Compensated temperature range	- 10 °C / + 40 °C
Operating temperature range	- 30 °C / +70 °C
Safe overload	150 % F.S.
Breaking load	250 % F.S.
Shielded cable	

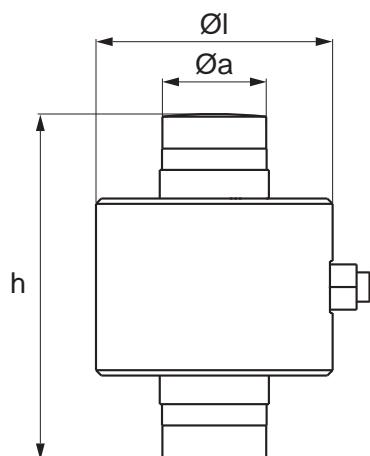RCD | COLUMN

Version codes

Max (kg)	I 0 (mm)	h (mm)	a Ø (mm)	Codice	
30.000	88,9	130	39	RCD30C4	
40.000				RCD40C4	
50.000				RCD50C4	


Technical features

Maximum number of verification intervals	nLC = 4.000
Maximum capacity	50.000 kg
Y value	Vmin = EMax / 10.000
Nominal rated output	200.000 digits
Temperature effect on full scale output	0,0012 % / °C
Temperature effect on zero	0,0016 % / °C
Creep at nominal load over 30 minutes	0,021 % F.S.
Nominal range of excitation voltage	5 - 15 Vdc
Combined error	± 0,014 % F.S.
Zero balance	-
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-20 °C / +60 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Converter rate	Max. 100 conv. / sec.
RS485 Interface communication rate	4.800 / 19.200 bit / sec.
Communication technology	RS485
Communication protocol	Dini Argeo proprietary protocol
Internal resolution	24 bit
Shielded cable	

Main options and accessories (for a complete list visit www.diniargeo.com)

Mounting kits	Material	Description	Code	
	Zinc-plated steel	Kit of 2 jointed cups for self-alignment and fixing plate	KRCA	

RL5426DC | COLUMN

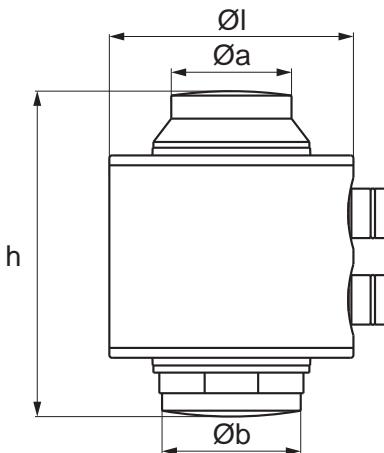

Version codes

Max (kg)	I Ø (mm)	h (mm)	Code
30.000	88,9	118,5	RL5426DC-30T
40.000			RL5426DC-40T


Technical features

Maximum number of verification intervals	nLC = 6.000
Maximum capacity	40.000 kg
Y value	Vmin = Emax / 18.000
Nominal rated output	60.000 digits
Temperature effect on full scale output	0,004 % F.S. / 5°C
Temperature effect on zero	0,01 % F.S. / 5°C
Creep at nominal load over 30 minutes	0,01 % F.S.
Nominal range of excitation voltage	8 - 15 Vdc
Combined error	0,015 % F.S.
Zero balance	± 1 % F.S.
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-35 °C / +70 °C
Safe overload	150 % F.S.
Breaking load	300 % F.S.
Converter rate	Max. 40 conv. / sec.
RS485 Interface communication rate	Max. 100 kHz
Communication technology	RS485
Communication protocol	Rice Lake proprietary protocol
Internal resolution	24 bit
Shielded cable	

Options & accessories

Mounting kits	Material	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code
	Stainless steel	-	-	-	173798
	Zinc-plated steel	Up to 40.000 kg (load cell capacity)	82	67	173801

RL5416DC | COLUMN

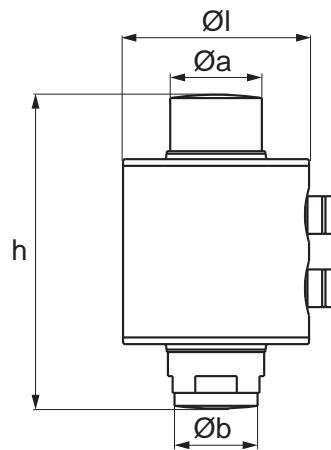

Version codes

Max (kg)	I Ø (mm)	h (mm)	Code	
30.000	88,9	150	RL5416DC-30T	
40.000			RL5416DC-40T	


Technical features

Maximum number of verification intervals	nLC = 4.000
Maximum capacity	40.000 kg
Y value	Vmin = Emax / 18.000
Nominal rated output	40.000 punti
Temperature effect on full scale output	0,01 % F.S. / 10°C
Temperature effect on zero	0,02 % F.S. / 10°C
Creep at nominal load over 30 minutes	0,014 % F.S.
Nominal range of excitation voltage	8 - 15 Vdc
Combined error	0,022 % F.S.
Zero balance	-
Compensated temperature range	-10 °C / +40 °C
Operating temperature range	-35 °C / +70 °C
Safe overload	120 % F.S.
Breaking load	300 % F.S.
Converter rate	Max. 40 conv. / sec.
RS485 Interface communication rate	Max. 100 kHz
Communication technology	RS485
Communication protocol	Rice Lake proprietary protocol
Internal resolution	24 bit
Shielded cable	

Options & accessories

Mounting kits	Material	Description	Code	
	Stainless steel	Kit of 2 jointed cups for self-alignment of the load cells	173793	

RCPTD | COLUMN

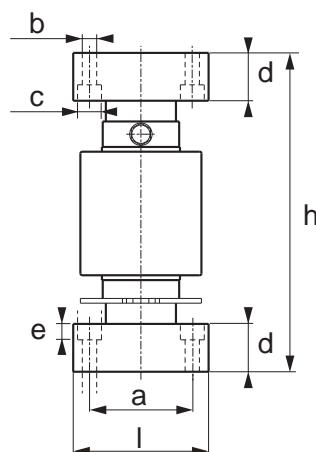

Version codes

Max (kg)	I Ø (mm)	h (mm)	a (mm)	b Ø (mm)	c Ø (mm)	d (mm)	e (mm)	Code	
30.000	85	200	64,5	N°4 x 9	N°4 x 15	30	10	RCPTD30C4-1	

Technical features

Maximum number of verification intervals	nLC = 4.000
Maximum capacity	30.000 kg
Y value	-
Nominal rated output	60.000 digits
Temperature effect on full scale output	± 0,02 % F.S.
Temperature effect on zero	-
Creep at nominal load over 30 minutes	± 0,03 % F.S.
Nominal range of excitation voltage	10 - 18 Vdc
Combined error	± 0,01 % F.S.
Zero balance	± 0,02 % F.S. / 10 °C
Compensated temperature range	-10 °C / +40° C
Operating temperature range	-10 °C / +70° C
Safe overload	150 % F.S.
Converter rate	Max. 20 conv. / sec.
RS485 Interface communication rate	Max. 100 kHz
Communication technology	RS485
Communication protocol	Dini Argeo proprietary protocol
Internal resolution	24 bit
Shielded cable	

173801 | MOUNTING KIT

ZINC
PLATED
STEEL

Mounting kits for RL5426 and RL5426DC series Column load cells up to 40.000 kg. Suitable for weighing large capacity silos, tanks and hoppers.

Version codes

Mounting kits	Material	Weight (kg)	Max capacity (kg)	Max lift-off force (kN)	Max side force (kN)	Code	
	Zinc-plated steel	20	Up to 40.000 kg (load cell capacity)	82	67	173801	

Technical features


Construction in zinc-plated steel
Anti-tipping system
Locking/bypass system for easy transport and maintenance
Overload protection nuts
Great resistance to lateral forces
Locking nuts to maintain the raised position simplify the installation and the removal of the load cell

Main options and accessories (for a complete list visit www.diniargeo.com)

Option	Description	Code	
	Grounding cable for weighing kit. 16 mm ² section cable, 20 mm eyelets.	GNDC20	

This kit is designed to allow the correct functioning of the cells and the requested weighing accuracy, within the limits described into the technical manual.

Technical drawing (mm)

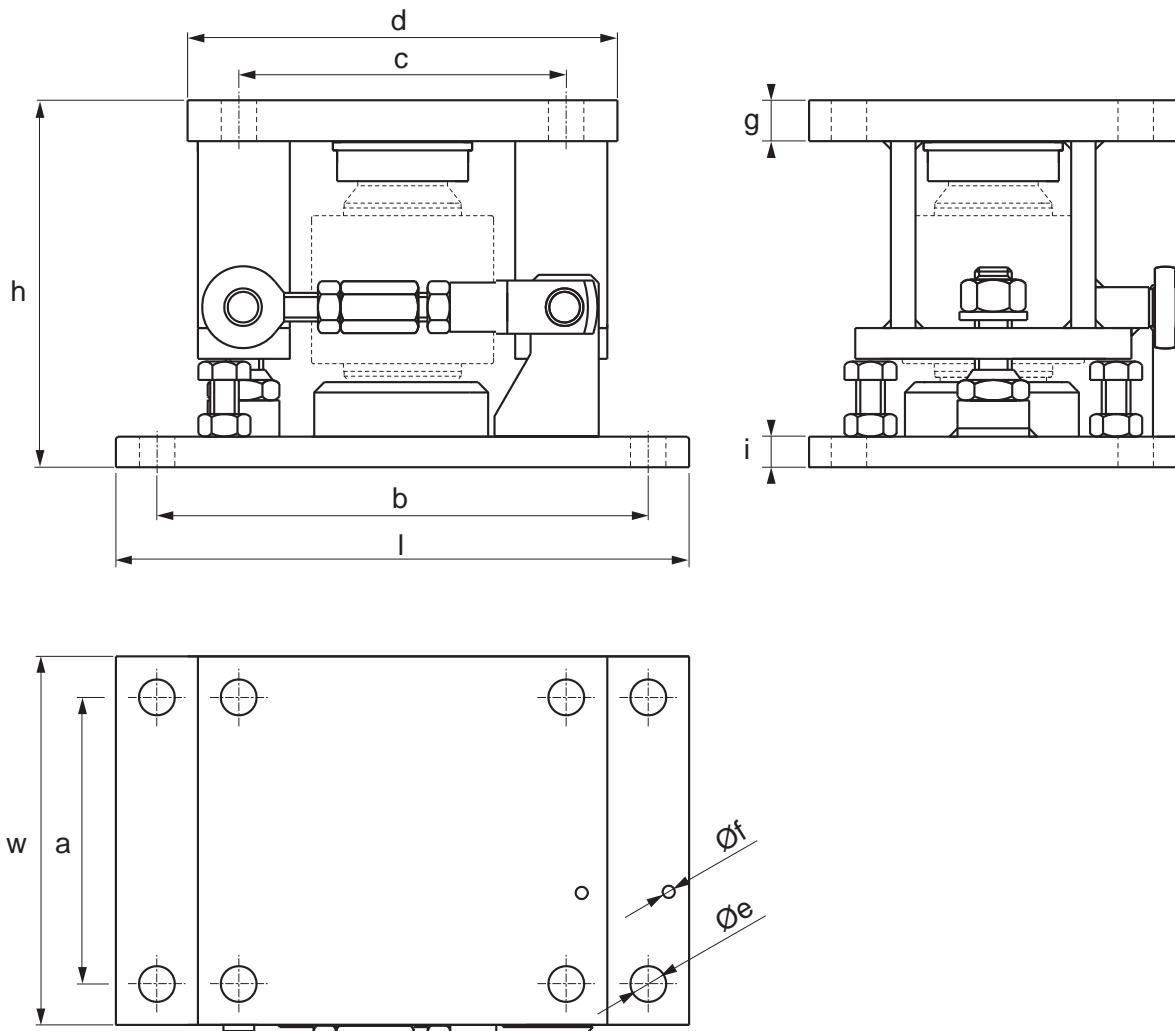

Max (kg)	I (mm)	w (mm)	h (mm)	a (mm)	b (mm)	c (mm)	d (mm)	e Ø (mm)	f Ø (mm)	g (mm)	i (mm)	Code
40.000	280	180	180	140	240	160	160	17,5	N°2 x M8	200	150	173801

LOAD PINS



Load Pins are a key component in the construction of weighing or safety control systems. Designed and manufactured specifically for each integrated solution, they are suitable for a wide range of applications and areas: industrial, agricultural, logistics, automotive, civil, construction.

Particularly suitable for moving applications such as cranes, overhead cranes, bulldozers, hoists and robotic booms. Dini Argeo designs and manufactures customized Load Pins to meet customer's needs and to suit any weighing application. Contact our sales office for further information.

OFF-CENTER

BENDING BEAM

SHEAR BEAM

DOUBLE SHEAR BEAM

TENSION

COMPRESSION

COLUMN

LOAD PINS

OTHER



ACCESSORIES LOAD CELLS

“

Dini Argeo offers a complete range of junction boxes and accessories to connect load cells to weighing electronics.

”

ABS | JUNCTION BOXES

	Option	Dimensions (mm)	Equalisation	Fairleads	Material	Surge Arresters	IP Rate		Code	
OFF-CENTER		120 x 80 x 55	-	4+1 (PG9)	ABS	-	IP67	-	JB4	
		120 x 80 x 55	-	4+1 (PG9)	ABS	-	IP67	●	JB4A	
BENDING BEAM		120 x 80 x 55	●	4+1 (PG9)	ABS	-	IP67	-	JB4Q	
		120 x 80 x 55	●	4+1 (PG9)	ABS	-	IP67	●	JB4QA	
SHEAR BEAM		120 x 80 x 55	●	4+1 (PG9)	ABS	●	IP67	-	JB4PLUS	
		220 x 120 x 90	●	8+1 (PG11)	POLYESTER	●	IP66	-	JB8Q-1	
DOUBLE SHEAR BEAM		220 x 120 x 90	●	10+1 (PG9)	POLYESTER	●	IP66	-	JB10Q	
		220 x 120 x 90	●	10+1 (PG9)	POLYESTER	●	IP66	-	JB10QD-1	

Main options and accessories (for a complete list visit www.diniargeo.com)

Option	Description	Code	
	Anti-condensation, insulating and sealing gel. Useful to protect the electronic circuits of the weighing system, even under prolonged immersion.	GELBOX	

- As standard

STAINLESS STEEL | JUNCTION BOXES

Option	Dimensions (mm)	Equalisation	Fairleads	Material	Surge Arresters	IP Rate		Code	
		-	1+1 (PG9)	Stainless steel	-	IP68	-	JB1I	
	190 x 130 x 45	-	1+1 (PG9)	Stainless steel	-	IP66	●	JB1AI	
	190 x 130 x 45	●	2+1 (PG9)	Stainless steel	-	IP66	●	JB2QAI	
	190 x 130 x 45	●	3+1 (PG9)	Stainless steel	-	IP66	●	JB3QAI	
	190 x 130 x 45	-	4+1 (PG9)	Stainless steel	-	IP66	●	JB4AI	
	155 x 158 x 45	●	4+1 (PG9)	Stainless steel	-	IP65	-	JB4QI	
	190 x 130 x 45	●	4+1 (PG9)	Stainless steel	-	IP66	●	JB4QAI	
	221 x 105 x 39	●	4+1 (PG9)	Stainless steel	●	IP68 IP69K	-	JB4QIP69K	
	190 x 132 x 50	●	6+1 (PG9)	Stainless steel	-	IP65	-	JB6QI	
	343 x 132 x 66	●	10+1 (PG11)	Stainless steel	●	IP68 IP69K	●	JB10QIP69K-1	

Main options and accessories (for a complete list visit www.diniargeo.com)

Option	Description	Code	
	Anti-condensation, insulating and sealing gel. Useful to protect the electronic circuits of the weighing system, even under prolonged immersion.	GELBOX	

- As standard

ZBA1S | ZENER BARRIER

ZBA1S Zener barrier is the perfect solution for the connection between a weighing terminal and a weight receiver system in the ATEX zone. ZBA1S integrates three barriers in one, protecting the excitation, signal and sense line. This feature makes the installation easier, especially in small spaces. Available also as ATEX ABS housing kit.

Version codes


Option	Description	Code
	Intrinsic protection three channel Zener barrier. Specific for connection to load cells, for mounting on DIN rail in a safe area, or in a flame-proof case.	ZBA1S
	Shielded 6 x 0,25 mm ² cable (suitable for Ex zones). €/m	LCCB
		LCCBA
	Shielded, blue, 6 x 0,22 mm ² cable, for EX i (2GD) applications. €/m	EXCB6

ATEX certification

Option	Description	Code
	ATEX declaration for the whole system with Dini Argeo Zener barriers. Ex II 2G IIC T6 Gb X e Ex II 2D IIIC T125°C Db X system, with label of the whole system, for weight indicator connected to Dini Argeo zener barriers, connected to a mechanical structure with ATEX load cells (each cell must be certified with CCATEX option). Provided with descriptive document of the assembly and ATEX EU declaration of conformity of the assembly (EN and IT).	DCATEXMB4

Technical features

Three channels passive Zener barrier for excitation, signal and sense line.
Ex marking: ATEX II (1)G, II (1)D, I (M1) IECEx [circuit(s) in zone 0/1/2]
Protection: [Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I (-20 °C ≤ Tamb ≤ +60 °C)
Equipped with 3 channels for the protection of the the excitation line (CN3/CN6), signal line (CN1/CN4) and the sense line (CN2/CN5), for improved signal stability.
"SLIM" type case, iper-compact, for DIN rail installation.
Operating temperature: -20 °C ÷ +60 °C.
Storage temperature: -25 °C ÷ +70 °C
Rating: 14 Vrms differential and 8 Vrms through earth for CN3 connector, 20 Vrms for the CN1 & CN2
Maximum Security Voltage (Um): 250 Vrms
Maximum Security Current (current interruption capability): 1500 A
Protection rating: IP20

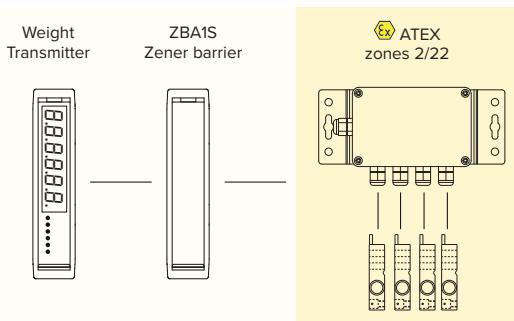

LCCB | CABLE

Shielded cable for connection of weight indicators to load cells or junction boxes.



Version codes

Option	Description	Code
	Shielded 6 x 0,25 mm ² cable (suitable for Ex zones). €/m	LCCB
	Protection sheathing for shielded cable. €/m	PRCB

Technical features

Type	6 pins x 0,25 mm ² .
Conductor	Flexible bare copper class 5.
Insulation	PVC compound type R2.
Shield	Tinned copper braid shield; coverage 80%.
Sheath	PVC compound type Rz. Grey colour.
Laying	Fixed. Maximum drawing strength 50 N/mm ² of total copper section. Minimum bending radius: outer diameter of cable times 10.

EXCB6 | CABLE

Armoured cable for connection of weight indicators to load cells or junction boxes.



Version codes

Option	Description	Code
	Armoured 6 x 0,25 mm ² cable (suitable for Ex zones). €/m	LCCBA

Technical features

Type	6 pins x 0,25 mm ² .
Conductor	Flexible bare copper, class 14 x 0,15 mm (0,25 mm ² - AWG24)
Insulation	Composed of PVC (Y), hardness 94 Sha, nominal diameter 1.25 ± 0.1 mm.
Shield	Iron-zinc alloy armour, coverage > 85%.
Sheath	PVC inner sheath, diameter 5mm. Transparent PVC outer sheath, 8 mm diameter.
Laying	Fixed. Minimum bending radius: >/= 5 x O.D.
Temperature range	-15 / +70 °C.

LCCBM | CABLE

Shielded cable for connection of weight indicators to load cells or junction boxes.

Version codes

Option	Description	Code
	Shielded 4 x 0,34 mm ² cable for moving applications. €/m.	LCCBM
	Protection sheathing for shielded cable. €/m	PRCB

Technical features

Type	4 pins x 0,34 mm ² .
Conductor	Extra-flexible copper class 6.
Insulation	Polyolefin.
Shield	Tinned copper braid shield; coverage ≥ 85%.
Sheath	Abrasion resistant Polyurethane. Green colour.
Laying	Dynamic. Minimum bending radius: outer diameter of cable times 6.

EXCB6 | CABLE

Shielded cable for connection of weight indicators to load cells or junction boxes.



Version codes

Option	Description	Code
	Shielded, blue, 6 x 0,22 mm ² cable, for EX i (2GD) applications. €/m	EXCB6

Technical features

Type	6 pins x 0,22 mm ² .
Conductor	Stranded tinned copper class 6.
Insulation	PVC + 105°.
Shield	Tinned copper braid shield; coverage 80%.
Sheath	Polyurethane. Blue colour.
Laying	Fixed. Minimum bending radius: outer diameter of cable times 7.

HIGH SPEED PROCESS & AUTOMATION WEIGHT TRANSMITTERS

“

These weight transmitters are designed for use in applications where a very high sampling rate is required in order to weigh with extreme precision in fractions of a second.

Ideal for belt weighing, micro-dosing and dosing, in-line filling and process control applications.

”

HIGH SPEED PROCESS & AUTOMATION WEIGHT TRANSMITTERS

Comparative table

	DGT1SX	DGT4X	DGX4SP
Number of scales / channels	1	Up to 4	Up to 4
Communication rate	Up to 4.800 Hz	Up to 2.600 Hz	Up to 2.600 Hz
Web server	•	•	
Integrated fieldbus	•	•	
Modbus RTU	•	•	•
RS485	•	•	•
RS232		•	
USB	•	•	
Digital I/O	•	•	
Analog Output	•	•	
Case	ABS	ABS	
Electric approvals	UL Listed	Upon request	Upon request
Metrological approvals	OIML R61 MID	•	•
	OIML R51	•	•
	OIML R76	•	•
	EU Type Examination certificate	•	•

DGT1SX | 1 CHANNEL

WITH INTEGRATED FIELDBUS & WEB SERVER

Highlights:

- high-speed sampling
- load cell status diagnostics
- USB port for quick programming



Main features

Technical features

Number of scales / channels	1					
Calibration	Electronic (Theoretical)	Real calibration with sample weights	Via Web server	Via XSpeedTool		
Communication rate	Up to 4.800 Hz					
Maximum display digits	0...800.000					
Maximum load cell number	Up to 16 x 350 Ω					
Minimum sensitivity	High resolution	0,01 µV/d				
	Legal for trade	0,3 µV/e				
Legal for trade number of intervals	Up to 10.000e or multirange 2 x 3.000e					
Load cell excitation voltage	5 V					
Communication ports	See version table					
Communication protocols	Modbus RTU, ASCII or fieldbus					
Communication rate	Via serial port		Via Fieldbus			
	Up to 1.600 Hz		Up to 120 Hz			
Configuration PC utility	DiniTools, XSpeedTool					
Display	Red LED 8 mm, 6 digits					
Keyboard	Mechanical, 5 keys					
Case	ABS (UL compliant)					
Power supply	12÷24 Vdc, 5 W					
Operating temperature range	Internal Use	OIML approved	Humidity			
	-20 °C / +60 °C	-10 °C / +40 °C	85 %			

Approvals	Type	Description
UL Listed	Electric	Upon request
2014/30/EU EMC	Electric	EN 61000-6-2 : 2005 EN 61000-6-4 : 2007+A1 : 2011 EN 61326-1 : 2013 EN 61326-1 : 2013 EN 55011 : 2009+A1 : 2010 EN 55011 : 2009+A1 : 2010
2014/35/EU LVD	Electric	EN 61010-1 : 2010
2011/65/EU (RoHS)	Electric	EN 50581 : 2012
OIML R61 - MID	Metrological	AWI - Automatic filling machine
OIML R51 - MID	Metrological	AWI - Checkweighers
OIML R76	Metrological	NAWI - Weight transmitter
EU Type Examination Certificate (2014/31/EU)	Metrological	NAWI - Weight transmitter

Analog output	
Settings	0÷5 Vdc, 0÷10 Vdc, 0÷20 mA, 4÷20 mA
Resolution	16 bit
Communication rate	0,1 s
Opto-isolated as standard	Yes

Digital inputs / outputs	V	I
2 Digital inputs	5÷48 Vdc	-
2 Digital outputs	48 Vdc	500 mA
Opto-isolated as standard		Yes

Version codes

Fieldbus	Analog output	Modbus RTU	RS485	2 IN / 4 OUT	USB	Web server	Code	
	•	•	•	•	•		DGT1SX	DGT1SX
	•	•	•	•	•		DGT1SX-AN	DGT4X
PROFINET	•			•	•	•	DGT1SX-PRONET	DGX4SP
EtherNet/IP	○			•	•	•	DGT1SX-ETHIP	DGT1S PLUS
Modbus TCP/IP	○			•	•	•	DGT1SX-MODTCP	DGT1S
EtherCAT	○			•	•		DGT1SX-ETHCAT	DGT1
Profibus	○			•	•		DGT1SX-PB	DGT4
CANopen	○			•	•		DGT1SX-CANOP	DGTIP
DeviceNet	○			•	•		DGT1SX-DEVNET	DGTIP


○ Special version, ask for estimate.

Main options and accessories (for a complete list visit www.diniargeo.com)

	Description	Code	
POWER SUPPLY	 12 Vdc power supply unit for DIN rail mounting. 110/240 Vac input. CE and UL certified. Not compatible with BOX2121S.	MDR2012	

	Description	Code	
PC SOFTWARES	 "XSPEED" PC software with oscilloscope function for system diagnostics and weighing filter optimization.	XSPEED	

Technical drawing (mm)

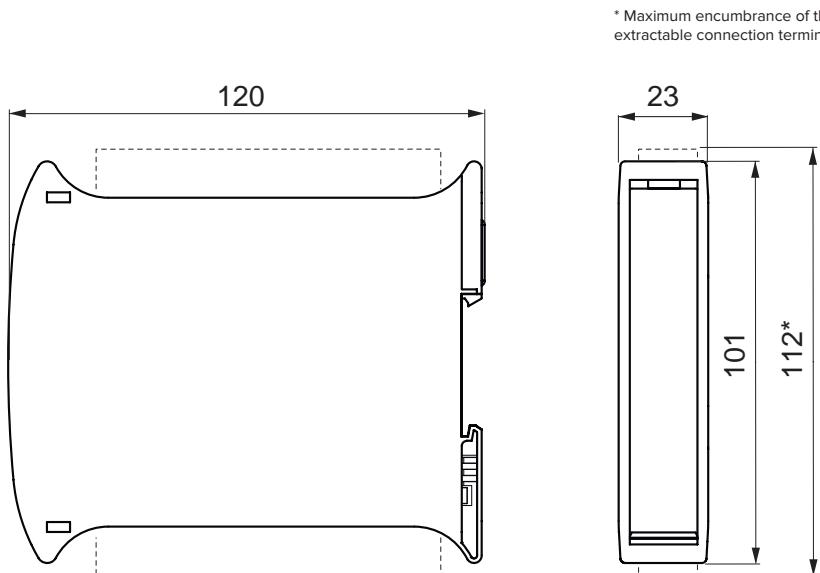


DGT4X | 4 CHANNELS

WITH INTEGRATED FIELDBUS & WEB SERVER

Highlights:

- smart junction box mode
- load unbalance warning
- optional digital load cell management
- faulty load cell exclusion
- USB port for quick programming

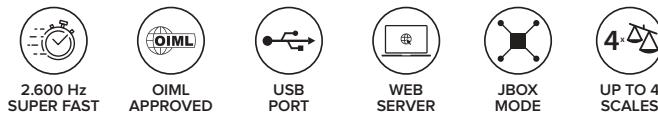

Main features

Technical features

Number of scales / channels	Up to 4					
Calibration	Electronic (Theoretical)	Real calibration with sample weights	Via Web server	Via XSpeedTool		
Communication rate	Uso monocanale 1 bilancia Uso multicanale fino a 4 bilance					
	Up to 2.600 Hz Up to 9.000 Hz					
Maximum display digits	0...800.000					
Maximum load cell number	Up to 16 x 350 Ω					
Minimum sensitivity	High resolution	0,01 µV/d				
	Legal for trade	0,3 µV/e				
Legal for trade number of intervals	Up to 10.000e or multirange 2 x 3.000e					
Load cell excitation voltage	5 V					
Communication ports	See version table					
Communication protocols	Modbus RTU, ASCII or fieldbus					
Web server	See version table					
Communication rate	Via serial port	Via Fieldbus				
	Up to 1.300 Hz	Up to 120 Hz				
Configuration PC utility	DiniTools, XSpeedTool					
Display	Red LED 14,2 mm, 7-segment, 6 digits					
Keyboard	Mechanical, 5 keys					
Case	ABS					
Power supply	12÷24 Vdc, 5 W					
Operating temperature range	Internal Use	OIML approved	Humidity			
	-20 °C / +60 °C	-10 °C / +40 °C	85 %			

Approvals	Type	Description
UL Listed	Electric	Upon request
2014/30/EU EMC	Electric	EN 61000-6-2 : 2005 EN 61000-6-4 : 2007+A1 : 2011 EN 61326-1 : 2013 EN 61326-1 : 2013 EN 55011 : 2009+A1 : 2010 EN 55011 : 2009+A1 : 2010
2014/35/EU LVD	Electric	EN 61010-1 : 2010
2011/65/EU (RoHS)	Electric	EN 50581 : 2012
OIML R61 - MID	Metrological	AWI - Automatic filling machine
OIML R51 - MID	Metrological	AWI - Checkweighers
OIML R76	Metrological	NAWI - Weight transmitter
EU Type Examination Certificate (2014/31/EU)	Metrological	NAWI - Weight transmitter

Analog output	Digital inputs / outputs	V	I
Settings	2 Digital inputs	12÷24 Vdc	5÷20 mA
Resolution	2 Digital outputs	48 Vac 60 Vdc	500 mA
Communication rate	Opto-isolated as standard	Yes	
Opto-isolated as standard			


Version codes


Fieldbus	Analog output	Modbus RTU	RS485	RS232	2 IN / 2 OUT	USB	Web server	Code	
		•	•	•	•	•		DGT4X	
	•	•	•	•	•	•		DGT4XAN	
PROFINET			•		•	•	•	DGT4XPONET	
EtherNet/IP				•	•	•	•	DGT4XETHIP	
Modbus TCP/IP			•		•	•	•	DGT4XMODTCP	
EtherCAT			•		•	•		DGT4XETHCAT	
Profibus			•		•	•		DGT4XPB	
CANopen			•		•	•		DGT4XCANOP	
DeviceNet			•		•	•		DGT4XDEVNET	

Main options and accessories (for a complete list visit www.diniargeo.com)

		Description	Code	
POWER SUPPLY		12 Vdc power supply unit for DIN rail mounting. 110/240 Vac input. CE and UL certified. Not compatible with BOX2121S.	MDR2012	
PC SOFTWARES		Description	Code	
PC SOFTWARES		"XSPEED" PC software with oscilloscope function for system diagnostics and weighing filter optimization.	XSPEED	

Technical drawing (mm)

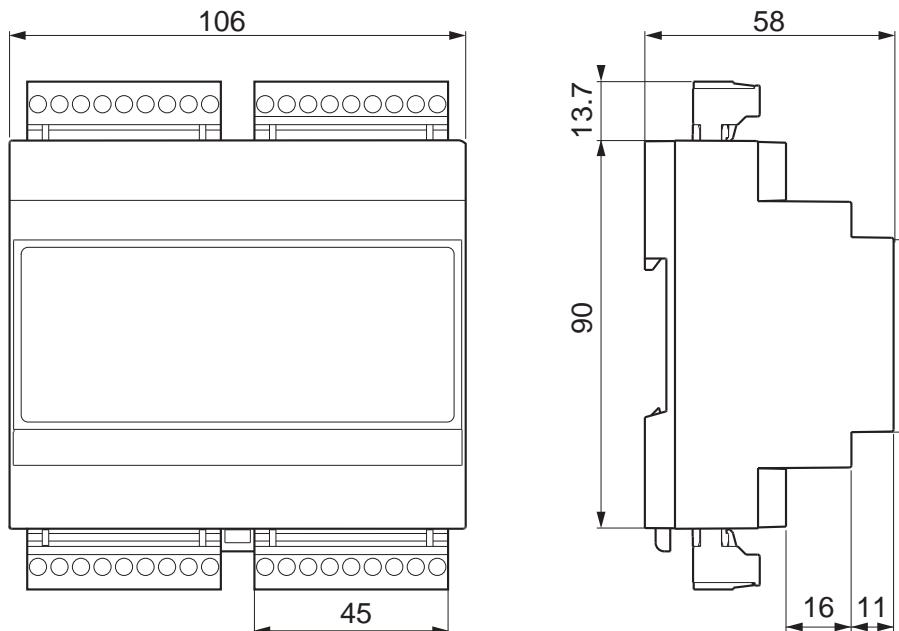

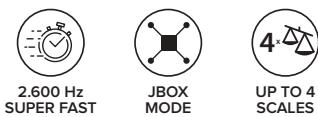DGX4SP | 4 CHANNELS

Main features

Technical features			
Number of scales / channels		Up to 4	
Calibration	Electronic (Theoretical)	Real calibration with sample weights	Via XSpeedTool
Communication rate			Up to 2.600 Hz
Maximum load cell number			Up to 16 x 350 Ω
Minimum sensitivity			0,01 µV/d
Load cell excitation voltage			5 V
Communication protocols			Modbus RTU, ASCII
Communication rate			Up to 60 Hz
Configuration PC utility			XSpeedTool
Power supply			4,5÷24 Vdc, 5 W
Operating temperature range		Internal Use	Humidity
		-20 °C / +60 °C	85 %

Approvals	Type	Description
2014/30/EU EMC	Electric	EN 61000-6-2 : 2005 EN 61000-6-4 : 2007+A1 : 2011 EN 61326-1 : 2013 EN 61326-1 : 2013 EN 55011 : 2009+A1 : 2010 EN 55011 : 2009+A1 : 2010
2014/35/EU LVD	Electric	EN 61010-1 : 2010
2011/65/EU (RoHS)	Electric	EN 50581 : 2012


Version codes

Modbus RTU	RS485	Code	
•	•	DGX4SP	

Main options and accessories (for a complete list visit www.diniargeo.com)

	Description	Code	
POWER SUPPLY	12 Vdc power supply unit for DIN rail mounting. 110/240 Vac input. CE and UL certified. Not compatible with BOX2121S.	MDR2012	
PC SOFTWARES	"XSPEED" PC software with oscilloscope function for system diagnostics and weighing filter optimization.	XSPEED	

Technical drawing (mm)

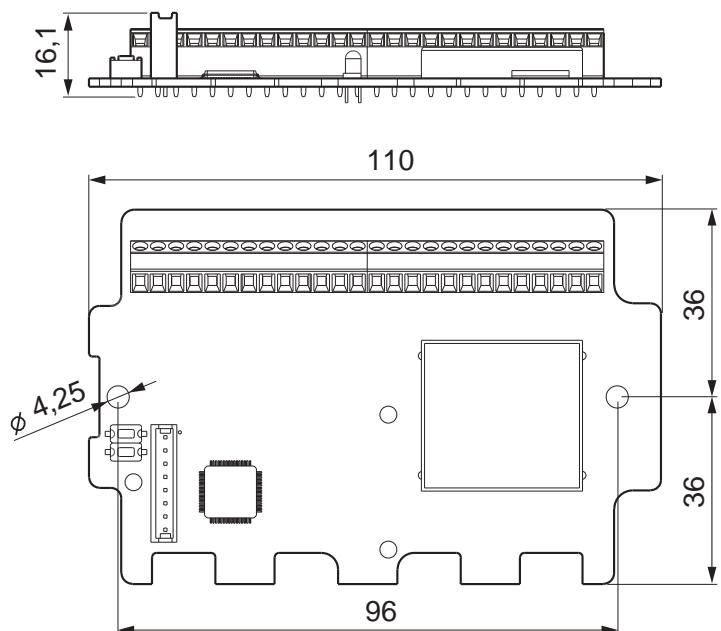

XSPEED TOOL | TOOL FOR FILTER CONFIGURATION**XSPEED TOOL****Main features****Technical features**

Time and frequency domain signal analysis.

Data reception at very high speed (up to 4.800 readings per second).

Automatic data acquisition based on time or weight thresholds.

Real time signal processing.

Application of filters of your choice, fully configurable, to remove vibrations, oscillations, peaks etc., making the weight stable and the scale reactive and performing.

Calibration of the instrument, which includes:

- Calibration using sample weights, with the possibility to linearize the system up to 8 points.

- Theoretical calibration, with the insertion of the data of the system to be created (load cells, dead load etc.).

Archive of weighs and configured filters.

Filters

Coarse filter for the removal of signal background noise and weight stabilization.

Fine filter to increase the reading accuracy.

Selective filter to isolate and eliminate noise with precise frequencies.

Minimum requirements

Operating System: Windows 10


Processor: 1.6 Ghz

Ram: 4 Gb

Free hard disk space: 250 Mb

Version codes

PC SOFTWARES	Description	Code
	"XSPEED" PC software with oscilloscope function for system diagnostics and weighing filter optimization.	XSPEED

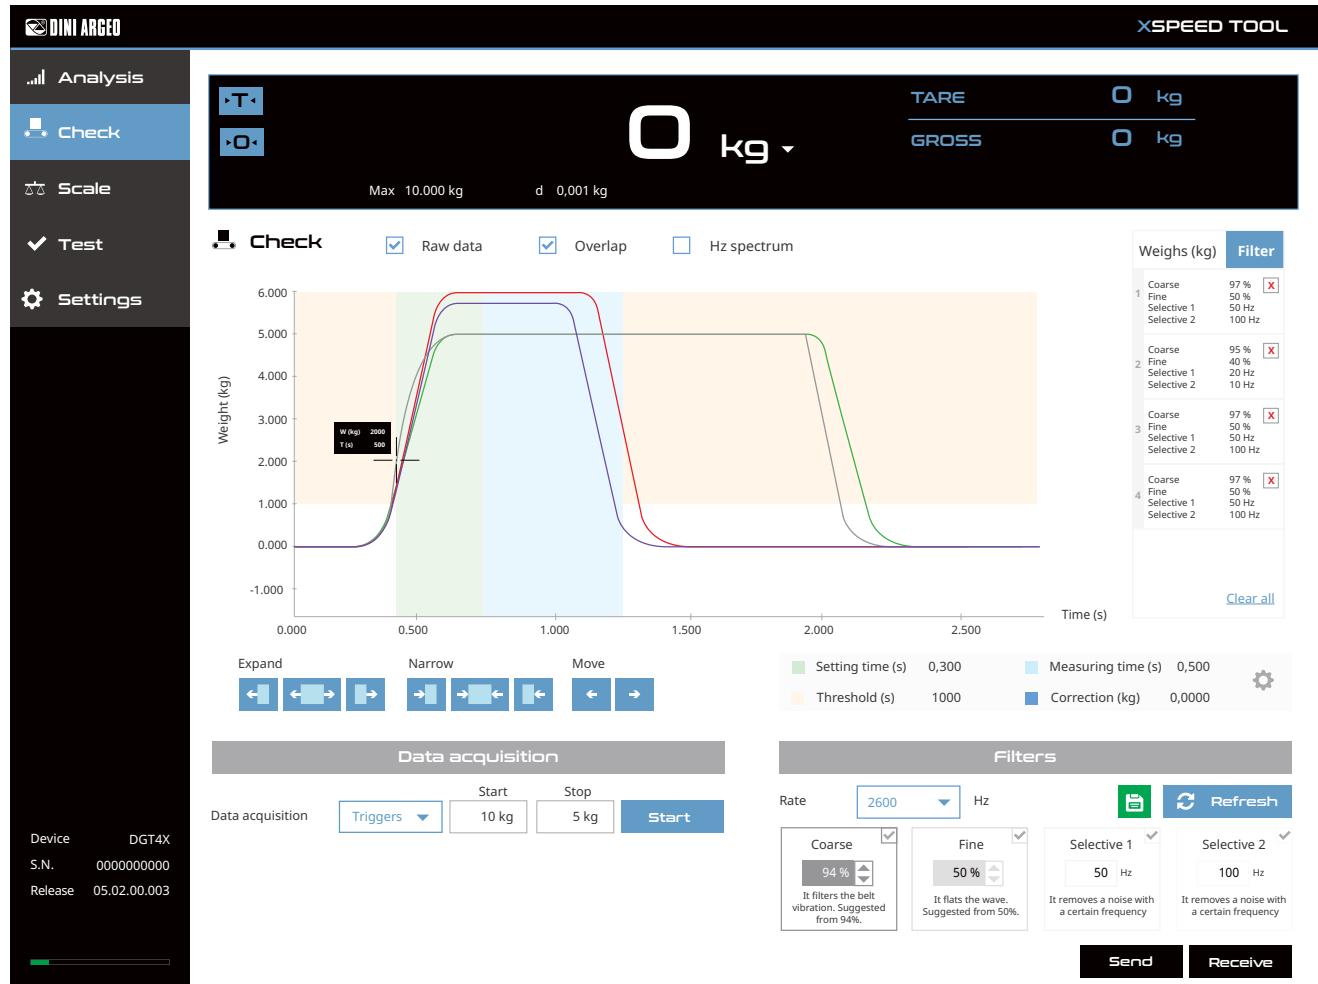

DGT1SX

DGT4X

DGX4SP

DGT1S PLUS

DGT1S

DGT1

DGT4

DGTP

DGTP

DGTO

DGT20

SAFETY & CONTROL WEIGHT TRANSMITTERS

“

These transmitters are the most convenient and cost-effective solution to create weight control and monitoring applications in industrial processes.

They are used to weigh silos, hoppers, roller conveyors and low-speed belts.



”

SAFETY & CONTROL WEIGHT TRANSMITTERS

Comparative table

	DGT1S PLUS	DGT1S	DGT1	DGT4	DGT1P	DGTP	DGTQ	DGT20	DGT20I
Mounting type	DIN Rail				Panel				Wall / Table
Case	ABS	ABS	ABS	ABS	Aluminium	ABS	ABS	Stainless/ Painted steel	Stainless steel
Number of scales / channels	1	1	1	Up to 4	1	1	1	1	1
Communication rate	Up to 400 Hz	Up to 400 Hz	Up to 400 Hz	Up to 400 Hz	Up to 400 Hz	Up to 400 Hz	Up to 400 Hz	Up to 400 Hz	Up to 400 Hz
Web server	•				•			•	
Integrated fieldbus	•				•		•	•	•
Modbus RTU	•	•	•	•	•	•	•	•	•
RS485	•	•	•	•	•	•	•	•	•
RS232	•	•	•	•		•	•	•	•
Digital I/O	•	•	•	•	•	•	•	•	•
Analog Output	•	•	•	•	•	•	•	•	•
Electric approvals	UL Listed	Upon request	Upon request		Upon request				
Metrological approvals	OIML R61 MID	•	•	•	•	•	•	•	•
	OIML R51	•	•	•	•	•	•	•	•
	OIML R76	•	•	•	•	•	•	•	•
	EU Type Examination certificate	•	•	•	•	•	•	•	•

DGT1S PLUS | 1 CHANNEL
WITH INTEGRATED FIELDBUS & WEB SERVER



Main features

Technical features

Number of scales / channels	1		
Calibration	Electronic (Theoretical)	Real calibration with sample weights	Via Web server
Communication rate	Up to 400 Hz		
Maximum display digits	0...800.000		
Maximum load cell number	Up to 16 x 350 Ω		
Minimum sensitivity	High resolution	0,01 µV/d	
	Legal for trade	0,3 µV/e	
Legal for trade number of intervals	Up to 10.000e or multirange 2 x 3.000e		
Load cell excitation voltage	5 V		
Communication ports	See version table		
Communication protocols	Modbus RTU, ASCII or fieldbus		
Web server	Included in fieldbus version, see version table		
Communication rate	Via serial port	Via Fieldbus	
	Up to 325 Hz	Up to 16 Hz	
Configuration PC utility	DiniTools		
Display	Red LED 8 mm, 6 digits		
Keyboard	Mechanical, 5 keys		
Case	ABS		
Power supply	12÷24 Vdc, 5 W		
Operating temperature range	Internal Use	OIML approved	Humidity
	-20 °C / +60 °C	-10 °C / +40 °C	85 %

Approvals	Type	Description
UL Listed	Electric	Upon request
2014/30/EU EMC	Electric	EN 61000-6-2 : 2005 EN 61000-6-4 : 2007+A1 : 2011 EN 61326-1 : 2013 EN 61326-1 : 2013 EN 55011 : 2009+A1 : 2010 EN 55011 : 2009+A1 : 2010
2014/35/EU LVD	Electric	EN 61010-1 : 2010
2011/65/EU (RoHS)	Electric	EN 50581 : 2012
OIML R61 - MID	Metrological	AWI - Automatic filling machine
OIML R51 - MID	Metrological	AWI - Checkweighers
OIML R76	Metrological	NAWI - Weight transmitter
EU Type Examination Certificate (2014/31/EU)	Metrological	NAWI - Weight transmitter

<i>Analog output</i>	
Settings	0÷5 Vdc, 0÷10 Vdc, 0÷20 mA, 4÷20 mA
Resolution	16 bit
Communication rate	0,1 s
Opto-isolated as standard	Yes

<i>Digital inputs / outputs</i>	<i>V</i>	<i>I</i>
2 Digital inputs	5 ÷ 48 Vdc	-
2 Digital outputs	48 Vdc	500 mA
Opto-isolated as standard	Yes	


Version codes

Fieldbus	Analog output	Modbus RTU	RS485	2 IN / 2 OUT	USB	Web server	Code	
		•	•	•			DGT1SP	DGT1SX
	•	•	•	•			DGT1SP-AN	DGT4X
PROFINET				•	•	•	DGT1SP-PRONET	
EtherNet/IP				•	•	•	DGT1SP-ETHIP	
Modbus TCP/IP				•	•	•	DGT1SP-MODTCP	
EtherCAT				•	•		DGT1SP-ETHCAT	
Profibus				•	•		DGT1SP-PB	
CANopen				•	•		DGT1SP-CANOP	
DeviceNet				•	•		DGT1SP-DEVNET	

Main options and accessories (for a complete list visit www.diniargeo.com)

	Description	Code	
POWER SUPPLY	 12 Vdc power supply unit for DIN rail mounting. 110/240 Vac input. CE and UL certified. Not compatible with BOX2121S.	MDR2012	DGT1S PLUS

Technical drawing (mm)

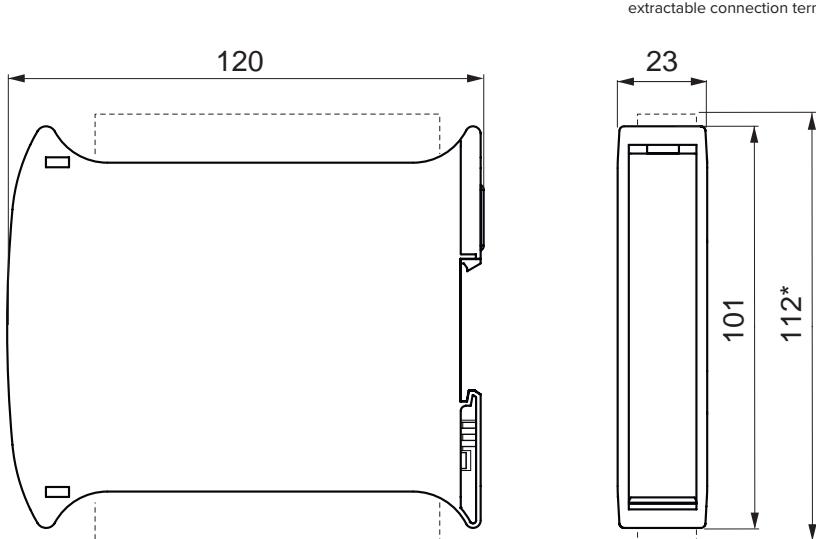

DGT1S | 1 CHANNEL

OIML APPROVED

Main features

Technical features			
Number of scales / channels		1	
Calibration	Electronic (Theoretical)	Real calibration with sample weights	Via Web server
Communication rate			Up to 400 Hz
Maximum display digits			0...800.000
Maximum load cell number			Up to 8 x 350 Ω
Minimum sensitivity	High resolution	0,01 µV/d	
	Legal for trade	0,3 µV/e	
Legal for trade number of intervals		Up to 10.000e or multirange 2 x 3.000e	
Load cell excitation voltage		5 V	
Communication ports		See version table	
Communication protocols		Modbus RTU, ASCII or fieldbus	
Communication rate	Via serial port	Via Fieldbus	
	Up to 325 Hz	Up to 16 Hz	
Configuration PC utility		DiniTools	
Display		Red LED 8 mm, 6 digits	
Keyboard		Mechanical, 5 keys	
Case		ABS	
Power supply		12÷24 Vdc, 5 W	
Operating temperature range		Internal Use	OIML approved
		-20 °C / +60 °C	-10 °C / +40 °C
		Humidity	85 %

Approvals	Type	Description
UL Listed	Electric	Upon request
2014/30/EU EMC	Electric	EN 61000-6-2 : 2005 EN 61000-6-4 : 2007+A1 : 2011 EN 61326-1 : 2013 EN 61326-1 : 2013 EN 55011 : 2009+A1 : 2010 EN 55011 : 2009+A1 : 2010
2014/35/EU LVD	Electric	EN 61010-1 : 2010
2011/65/EU (RoHS)	Electric	EN 50581 : 2012
OIML R61 - MID	Metrological	AWI - Automatic filling machine
OIML R51 - MID	Metrological	AWI - Checkweighers
OIML R76	Metrological	NAWI - Weight transmitter
EU Type Examination Certificate (2014/31/EU)	Metrological	NAWI - Weight transmitter

Analog output	
Settings	0÷5 Vdc, 0÷10 Vdc, 0÷20 mA, 4÷20 mA
Resolution	16 bit
Communication rate	0,1 s
Opto-isolated as standard	Yes

Digital inputs / outputs	V	I
2 Digital inputs	12÷24 Vdc	5÷20 mA
2 Digital outputs	48 Vac 60 Vdc	150 mA
Opto-isolated as standard		Yes

Version codes


Modbus RTU	RS485	RS232	2 IN / 2 OUT	Analog output	Code
•	•	•	•		DGT1S
•	•	•	•	•	DGT1SAN

Main options and accessories (for a complete list visit www.diniargeo.com)

	Description	Code
POWER SUPPLY	12 Vdc power supply unit for DIN rail mounting. 110/240 Vac input. CE and UL certified. Not compatible with BOX2121S.	MDR2012

	Description	Code
WIFI	Serial to WiFi compact converter for DIN rail mounting.	WIFIT1S-1
ETHERCAT	RS485 to EtherCAT interface, for DIN rail mounting. With UL marked PCB, terminal block, plastic box and labels (if applicable).	ETHERCAT1S
ETHERNET/IP	RS485 to Ethernet/IP interface, for DIN rail mounting. With UL marked PCB, terminal block, plastic box and labels (if applicable).	ETHERNETIP1S
CANOPEN	RS485 to CANopen interface, for DIN rail mounting. With UL marked PCB, terminal block, plastic box and labels (if applicable).	CANOPEN1S
DEVICENET	RS485 to DeviceNet interface, for DIN rail mounting. With UL marked PCB, terminal block, plastic box and labels (if applicable)	DEVICENET1S
PROFIBUS	RS485 to Profibus compact interface, for DIN rail mounting. With UL marked PCB, terminal block, plastic box and labels (if applicable).	PROFIBUS1S
PROFINET	RS485 to PROFINET interface, for DIN rail mounting. With UL marked PCB, terminal block, plastic box and labels (if applicable).	PROFINET1S

Technical drawing (mm)

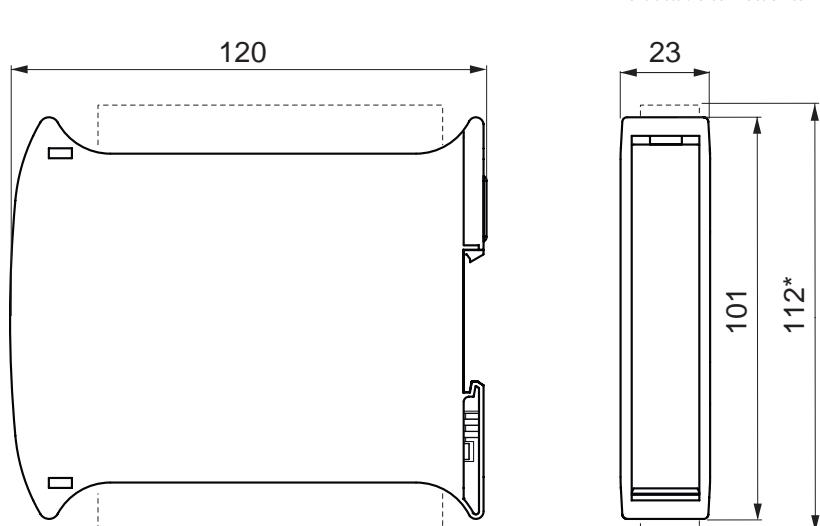

DGT1 | 1 CHANNEL

OIML APPROVED

Main features

Technical features			
Number of scales / channels		1	
Calibration		Electronic (Theoretical) Real calibration with sample weights	
Communication rate		Up to 400 Hz	
Maximum display digits		0...800.000	
Maximum load cell number		Up to 8 x 350 Ω	
Minimum sensitivity	High resolution		0,01 µV/d
	Legal for trade		0,3 µV/e
Legal for trade number of intervals		Up to 10.000e or multirange 2 x 3.000e	
Load cell excitation voltage		5 V	
Communication ports		See version table	
Communication protocols		Modbus RTU, ASCII	
Communication rate		Up to 325 Hz	
Configuration PC utility		DiniTools	
Display		Red LED 8 mm, 6 digits	
Keyboard		Waterproof mechanical, 5 keys	
Case		ABS	
Power supply		12÷24 Vdc, 5 W	
Operating temperature range		Internal Use	OIML approved
		-20 °C / +60 °C	-10 °C / +40 °C
		Humidity	85 %

Approvals	Type	Description
2014/30/EU EMC	Electric	EN 61000-6-2 : 2005 EN 61000-6-4 : 2007+A1 : 2011 EN 61326-1 : 2013 EN 61326-1 : 2013 EN 55011 : 2009+A1 : 2010 EN 55011 : 2009+A1 : 2010
2014/35/EU LVD	Electric	EN 61010-1 : 2010
2011/65/EU (RoHS)	Electric	EN 50581 : 2012
OIML R61 - MID	Metrological	AWI - Automatic filling machine
OIML R51 - MID	Metrological	AWI - Checkweighers
OIML R76	Metrological	NAWI - Weight transmitter
EU Type Examination Certificate (2014/31/EU)	Metrological	NAWI - Weight transmitter

Analog output	
Settings	0÷5 Vdc, 0÷10 Vdc, 0÷20 mA, 4÷20 mA
Resolution	16 bit
Communication rate	0,1 s
Opto-isolated as standard	Yes

Digital inputs / outputs	V	I
2 Digital inputs	12÷24 Vdc	5÷20 mA
2 Digital outputs	48 Vac 60 Vdc	150 mA
Opto-isolated as standard	Yes	


Version codes

Analog output	Modbus RTU	RS485	RS232	2 IN / 2 OUT	Code
	•	•	•		DGT1
	•	•	•	•	DGT1IO
•	•	•	•		DGT1AN

Main options and accessories (for a complete list visit www.diniargeo.com)


	Type	Description	Code
SERIAL CONVERTERS	Modbus TCP/IP	RS232 / RS485 to Ethernet converter.	SETHDIN-1
	Profibus DP	RS232 / RS485 to Profibus converter.	PROFI232-1
Description			Code
POWER SUPPLY	12 Vdc power supply unit for DIN rail mounting. 110/240 Vac input. CE and UL certified. Not compatible with BOX2121S.		MDR2012
Description			Code
INSTALLATION BOX	ABS wall IP65 box with transparent door for installation 1 DGT1 + 1 Serial converter. Dimensions 210x210x100 mm, equipped with 2 cable glands. Not compatible with MDR2012.		BOX2121S

Technical drawing (mm)

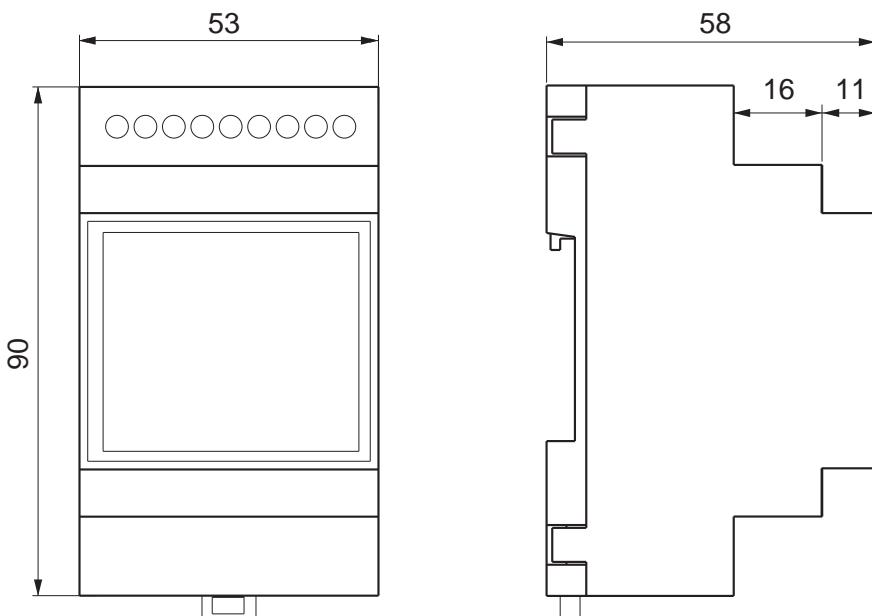

DGT4 | 4 CHANNELS

WITH INTEGRATED FIELDBUS & WEB SERVER

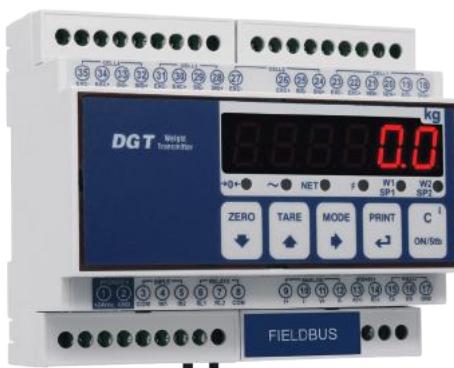

OIML APPROVED



WEB SERVER



UP TO 4 SCALES

Main features

Technical features

Number of scales / channels	Up to 4				
Calibration	Electronic (Theoretical)	Real calibration with sample weights	Via Web server		
Communication rate	Up to 400 Hz				
Maximum display digits	0...800.000				
Maximum load cell number	Up to 8 x 350 Ω				
Minimum sensitivity	High resolution	0,01 µV/d			
	Legal for trade	0,3 µV/e			
Legal for trade number of intervals	Up to 10.000e or multirange 2 x 3.000e				
Load cell excitation voltage	5 V				
Communication ports	See version table				
Communication protocols	Modbus RTU, ASCII or fieldbus				
Web server	Included in fieldbus version, see version table				
Communication rate	Via serial port	Via Fieldbus			
	Up to 325 Hz	Up to 16 Hz			
Configuration PC utility	DiniTools				
Display	Red LED 13 mm, 6 digits				
Keyboard	Waterproof mechanical, 5 keys				
Case	ABS				
Power supply	12÷24 Vdc, 5 W				
Operating temperature range	Internal Use	OIML approved	Humidity		
	-20 °C / +60 °C	-10 °C / +40 °C	85 %		

Approvals	Type	Description
UL Listed	Electric	Upon request
2014/30/EU EMC	Electric	EN 61000-6-2 : 2005 EN 61000-6-4 : 2007+A1 : 2011 EN 61326-1 : 2013 EN 61326-1 : 2013 EN 55011 : 2009+A1 : 2010 EN 55011 : 2009+A1 : 2010
2014/35/EU LVD	Electric	EN 61010-1 : 2010
2011/65/EU (RoHS)	Electric	EN 50581 : 2012
OIML R61 - MID	Metrological	AWI - Automatic filling machine
OIML R51 - MID	Metrological	AWI - Checkweighers
OIML R76	Metrological	NAWI - Weight transmitter
EU Type Examination Certificate (2014/31/EU)	Metrological	NAWI - Weight transmitter

Analog output

Settings	0÷5 Vdc, 0÷10 Vdc, 0÷20 mA, 4÷20 mA
Resolution	16 bit
Communication rate	0,1 s
Opto-isolated as standard	Yes

Digital inputs / outputs

	V	I
2 Digital inputs	12÷24 Vdc	5÷20 mA
2 Digital outputs	48 Vac 60 Vdc	150 mA
Opto-isolated as standard	Yes	


Version codes

Fieldbus	Analog output	Modbus RTU	RS485	RS232	2 IN / 2 OUT	Web server	Code	
	•	•	•	•	•		DGT4	DGT1SX
	•	•	•	•	•		DGT4AN	DGT4X
PROFINET				•	•	•	DGT4PRONET	
EtherNet/IP				•	•	•	DGT4ETHIP	
Modbus TCP/IP				•	•	•	DGT4MODTCP	DGX4SP
EtherCAT				•	•		DGT4ETHCAT	DGT1S PLUS
Profibus				•	•		DGT4PB-1	DGT1S
CANopen				•	•		DGT4CANOP	DGT1
DeviceNet				•	•		DGT4DEVNET	DGT4

Main options and accessories (for a complete list visit www.diniargeo.com)

		Description	Code	
POWER SUPPLY		12 Vdc power supply unit for DIN rail mounting. 110/240 Vac input. CE and UL certified. Not compatible with BOX2121S.	MDR2012	
INSTALLATION BOX		ABS wall IP65 box with transparent door for installation 1 DGT1 + 1 Serial converter. Dimensions 210x210x100 mm, equipped with 2 cable glands. Not compatible with MDR2012.	BOX2121S	

Technical drawing (mm)

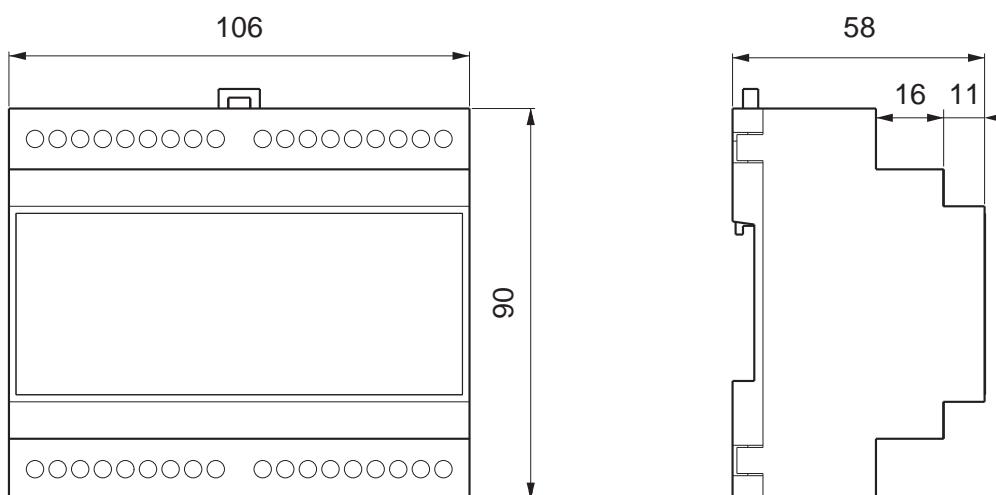

DGT1P | 1 CHANNEL

OIML APPROVED



FRONT PROTECTION

Main features**Technical features**

Number of scales / channels	1				
Calibration	Electronic (Theoretical) Real calibration with sample weights				
Communication rate	Up to 400 Hz				
Maximum display digits	0...800.000				
Maximum load cell number	Up to 16 x 350 Ω				
Minimum sensitivity	High resolution	0,01 µV/d			
	Legal for trade	0,3 µV/e			
Legal for trade number of intervals	Up to 10.000e or multirange 2 x 3.000e				
Load cell excitation voltage	5 V				
Communication ports	See version table				
Communication protocols	Modbus RTU, ASCII				
Communication rate	Up to 325 Hz				
Configuration PC utility	DiniTools				
Display	Red LED 14,2 mm, 6 digits				
Keyboard	Waterproof mechanical, 5 keys				
Case	Aluminium				
Power supply	12÷24 Vdc, 5 W				
Operating temperature range	Internal Use	OIML approved	Humidity		
	-20 °C / +60 °C	-10 °C / +40 °C	85 %		

Approvals	Type	Description
2014/30/EU EMC	Electric	EN 61000-6-2 : 2005
		EN 61000-6-4 : 2007+A1 : 2011
		EN 61326-1 : 2013 EN 61326-1 : 2013
		EN 55011 : 2009+A1 : 2010 EN 55011 : 2009+A1 : 2010
2014/35/EU LVD	Electric	EN 61010-1 : 2010
2011/65/EU (RoHS)	Electric	EN 50581 : 2012
OIML R61 - MID	Metrological	AWI - Automatic filling machine
OIML R51 - MID	Metrological	AWI - Checkweighers
OIML R76	Metrological	NAWI - Weight transmitter
EU Type Examination Certificate (2014/31/EU)	Metrological	NAWI - Weight transmitter

Analog output	
Settings	0÷5 Vdc, 0÷10 Vdc, 0÷20 mA, 4÷20 mA
Resolution	16 bit
Communication rate	0,1 s
Opto-isolated as standard	Yes

Digital inputs / outputs	V	I
2 Digital inputs	12÷24 Vdc	5÷20 mA
2 Digital outputs	48 Vac 60 Vdc	500 mA
Opto-isolated as standard	Yes	



Version codes

Analog output	Modbus RTU	RS485	2 IN / 2 OUT	Code
•	•	•	•	DGT1P
•	•	•	•	DGT1PAN

Main options and accessories (for a complete list visit www.diniargeo.com)

	Description	Code
POWER SUPPLY	 12 Vdc power supply unit for DIN rail mounting. 110/240 Vac input. CE and UL certified. Not compatible with BOX2121S.	MDR2012
OUTPUT	 Set of 4 optoisolated outputs (mounting and cable gland excluded).	C4OUT

Technical drawing (mm)

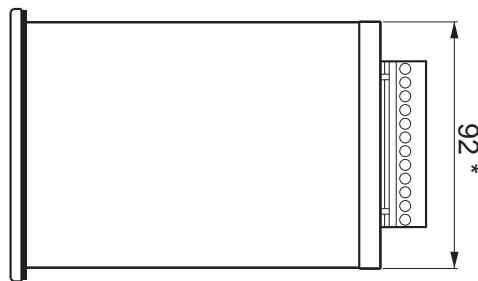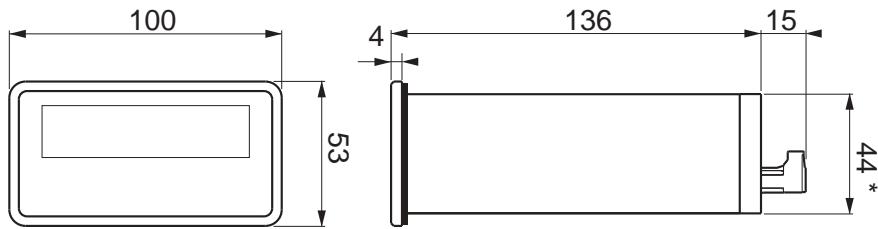

* Panel cutout (l x h) - 92 x 44 mm

DGTP | 1 CHANNEL

WITH INTEGRATED PROFIBUS



Main features

Technical features

Number of scales / channels	1 (up to 4 upon request)				
Calibration	Electronic (Theoretical) Real calibration with sample weights				
Communication rate	Up to 400 Hz				
Maximum display digits	0...800.000				
Maximum load cell number	Up to 16 x 350 Ω				
Minimum sensitivity	High resolution	0,01 µV/d			
	Legal for trade	0,3 µV/e			
Legal for trade number of intervals	Up to 10.000e or multirange 2 x 3.000e				
Load cell excitation voltage	5 V				
Communication ports	See version table				
Communication protocols	Modbus RTU, ASCII				
Communication rate	Via serial port	Via Fieldbus			
	Up to 325 Hz	Up to 16 Hz			
Configuration PC utility	DiniTools				
Display	Red LED 20 mm, 6 digits				
Keyboard	Waterproof mechanical, 5 keys				
Case	ABS				
Power supply	12÷24 Vdc, 5 W				
Operating temperature range	Internal Use	OIML approved	Humidity		
	-20 °C / +60 °C	-10 °C / +40 °C	85 %		

Approvals	Type	Description
2014/30/EU EMC	Electric	EN 61000-6-2 : 2005 EN 61000-6-4 : 2007+A1 : 2011 EN 61326-1 : 2013 EN 61326-1 : 2013 EN 55011 : 2009+A1 : 2010 EN 55011 : 2009+A1 : 2010
2014/35/EU LVD	Electric	EN 61010-1 : 2010
2011/65/EU (RoHS)	Electric	EN 50581 : 2012
OIML R61 - MID	Metrological	AWI - Automatic filling machine
OIML R51 - MID	Metrological	AWI - Checkweighers
OIML R76	Metrological	NAWI - Weight transmitter
EU Type Examination Certificate (2014/31/EU)	Metrological	NAWI - Weight transmitter

Analog output	
Settings	0÷5 Vdc, 0÷10 Vdc, 0÷20 mA, 4÷20 mA
Resolution	16 bit
Communication rate	0,1 s
Opto-isolated as standard	Yes

Digital inputs / outputs	V	I
2 Digital inputs	12÷24 Vdc	5÷20 mA
2 Digital outputs	48 Vac 60 Vdc	150 mA
Opto-isolated as standard	Yes	


Version codes

Fieldbus	Analog output	Modbus RTU	RS485	RS232	2 IN / 2 OUT	Code
		•	•	•	•	DGTP
	•	•	•	•	•	DGTPAN
Profibus			•	•	•	DGTBPPB-1

Main options and accessories (for a complete list visit www.diniargeo.com)

	Description	Code
POWER SUPPLY	12 Vdc power supply unit for DIN rail mounting. 110/240 Vac input. CE and UL certified. Not compatible with BOX2121S.	MDR2012

Technical drawing (mm)

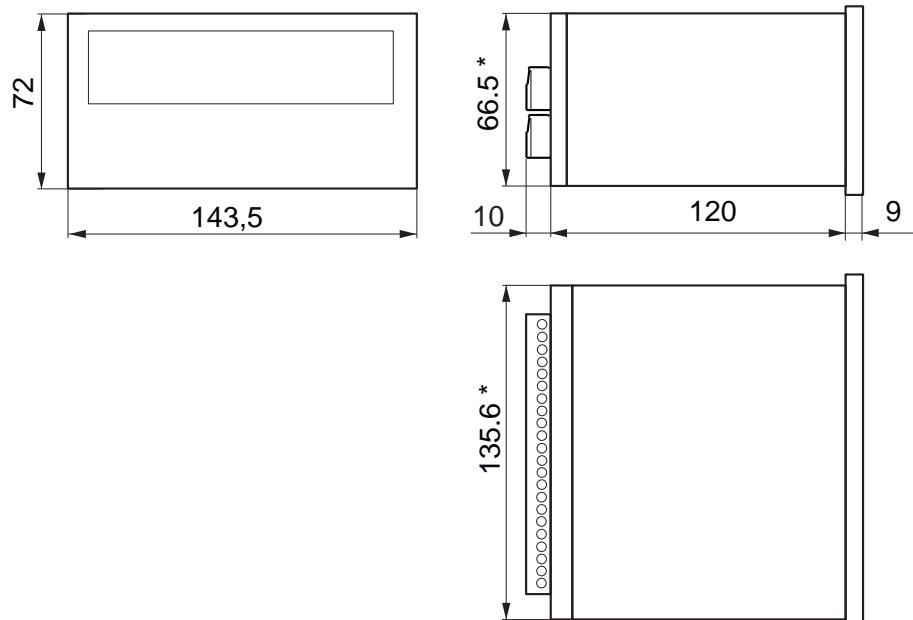

* Panel cutout (w x h) - 135,6 x 66,5 mm

DGTQ | 1 CHANNEL

WITH INTEGRATED PROFIBUS



OIML APPROVED



UP TO 4 SCALES

Main features

Technical features

Number of scales / channels		1 (up to 4 upon request)	
Calibration		Electronic (Theoretical) Real calibration with sample weights	
Communication rate		Up to 400 Hz	
Maximum display digits		0...800.000	
Maximum load cell number		Up to 8 x 350 Ω	
Minimum sensitivity	High resolution	0,01 µV/d	
	Legal for trade	0,3 µV/e	
Legal for trade number of intervals		Up to 10.000e or multirange 2 x 3.000e	
Load cell excitation voltage		5 V	
Communication ports		See version table	
Communication protocols		Modbus RTU, ASCII	
Communication rate	Via serial port	Via Fieldbus	
	Up to 325 Hz	Up to 16 Hz	
Configuration PC utility		DiniTools	
Display		Red LED 8 mm, 6 digits	
Keyboard		Waterproof mechanical, 5 keys	
Case		ABS	
Power supply		12÷24 Vdc, 5 W	
Operating temperature range		Internal Use	OIML approved
		-20 °C / +60 °C	-10 °C / +40 °C
		Humidity	
		85 %	

Approvals	Type	Description
2014/30/EU EMC	Electric	EN 61000-6-2 : 2005 EN 61000-6-4 : 2007+A1 : 2011 EN 61326-1 : 2013 EN 61326-1 : 2013 EN 55011 : 2009+A1 : 2010 EN 55011 : 2009+A1 : 2010
2014/35/EU LVD	Electric	EN 61010-1 : 2010
2011/65/EU (RoHS)	Electric	EN 50581 : 2012
OIML R61 - MID	Metrological	AWI - Automatic filling machine
OIML R51 - MID	Metrological	AWI - Checkweighers
OIML R76	Metrological	NAWI - Weight transmitter
EU Type Examination Certificate (2014/31/EU)	Metrological	NAWI - Weight transmitter

Analog output	
Settings	0÷5 Vdc, 0÷10 Vdc, 0÷20 mA, 4÷20 mA
Resolution	16 bit
Communication rate	0,1 s
Opto-isolated as standard	Yes

Digital inputs / outputs	V	I
2 Digital inputs	12÷24 Vdc	5÷20 mA
2 Digital outputs	48 Vac 60 Vdc	150 mA
Opto-isolated as standard		Yes


Version codes

Fieldbus	Analog output	Modbus RTU	RS485	RS232	2 IN / 2 OUT	Code
		•	•	•	•	DGTQ
	•	•	•	•	•	DGTQAN
Profibus			•	•	•	DGTQPB-1

Main options and accessories (for a complete list visit www.diniargeo.com)

Description		Code
POWER SUPPLY		MDR2012 12 Vdc power supply unit for DIN rail mounting. 110/240 Vac input. CE and UL certified. Not compatible with BOX2121S.
Description		Code
OUTPUT		C4OUT Set of 4 optoisolated outputs (mounting and cable gland excluded).

Technical drawing (mm)

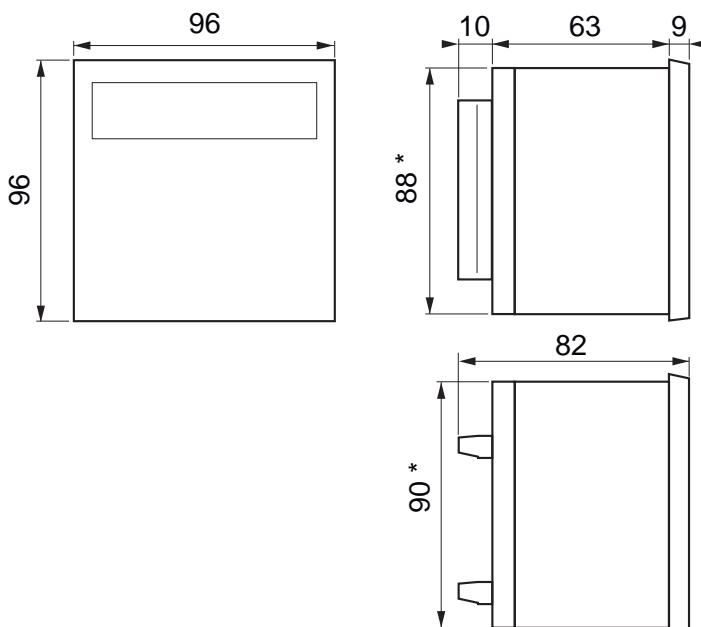

* Panel cutout (w x h) - 90 x 88,6 mm

DGT20 | 1 CHANNEL

WITH INTEGRATED FIELDBUS & WEB SERVER



Main features

Technical features			
Number of scales / channels		1 (up to 4 upon request)	
Calibration		Electronic (Theoretical)	Real calibration with sample weights
Communication rate			Via Web server
Maximum display digits			Up to 400 Hz
Maximum load cell number			0...800.000
Minimum sensitivity	High resolution	Up to 8 x 350 Ω	
	Legal for trade	0,01 µV/d	
Legal for trade number of intervals		0,3 µV/e	
Load cell excitation voltage		Up to 10.000e or multirange 2 x 3.000e	
Communication ports		5 V	
Communication protocols		See version table	
Communication rate		Modbus RTU, ASCII or fieldbus	
Web server	Via serial port		Via Fieldbus
	Up to 325 Hz		Up to 16 Hz
Configuration PC utility		Included in fieldbus version, see version table	
Display		DiniTools	
Keyboard		Red LED 6 20-mm digits and 6 LEDs to show active functions	
Case		Waterproof mechanical, 5 keys	
Power supply		Aluminium panel, stainless steel enclosure. Wall bracket included.	
Operating temperature range		Internal Use	OIML approved
		-20 °C / +60 °C	-10 °C / +40 °C
			85 %

Approvals	Type	Description
2014/30/EU EMC	Electric	EN 61000-6-2 : 2005 EN 61000-6-4 : 2007+A1 : 2011 EN 61326-1 : 2013 EN 61326-1 : 2013 EN 55011 : 2009+A1 : 2010 EN 55011 : 2009+A1 : 2010
2014/35/EU LVD	Electric	EN 61010-1 : 2010
2011/65/EU (RoHS)	Electric	EN 50581 : 2012
OIML R61 - MID	Metrological	AWI - Automatic filling machine
OIML R51 - MID	Metrological	AWI - Checkweighers
OIML R76	Metrological	NAWI - Weight transmitter
EU Type Examination Certificate (2014/31/EU)	Metrological	NAWI - Weight transmitter

Analog output	Digital inputs / outputs	V	I
Settings	0÷5 Vdc, 0÷10 Vdc, 0÷20 mA, 4÷20 mA	2 Digital inputs	12÷24 Vdc
Resolution	16 bit	2 Digital outputs	5÷20 mA
Communication rate	0,1 s	Opto-isolated as standard	48 Vac 60 Vdc
Opto-isolated as standard	Yes		150 mA


Version codes

Fieldbus	Analog output	Modbus RTU	RS485	RS232	2 IN / 2 OUT	Web server	Code	
		•	•	•	•		DGT20	DGT1SX
PROFINET	•	•	•	•	•	•	DGT20AN	DGT4X
EtherNet/IP				•	•	•	DGT20PRONET	DGX4SP
Modbus TCP/IP				•	•	•	DGT20ETHIP	DGT1S PLUS
EtherCAT				•	•		DGT20MODTCP	DGT1S
Profibus				•	•		DGT20ETHCAT	DGT1
CANopen				•	•		DGT20PB-1	DGT1
DeviceNet				•	•		DGT20COPEN	DGT4
							DGT20DEVNET	DGT1P

Main options and accessories (for a complete list visit www.diniargeo.com)

	Description	Code	
SUPPORT BRACKETS	 Kit for panel installation.	DGTSTF	

Technical drawing (mm)

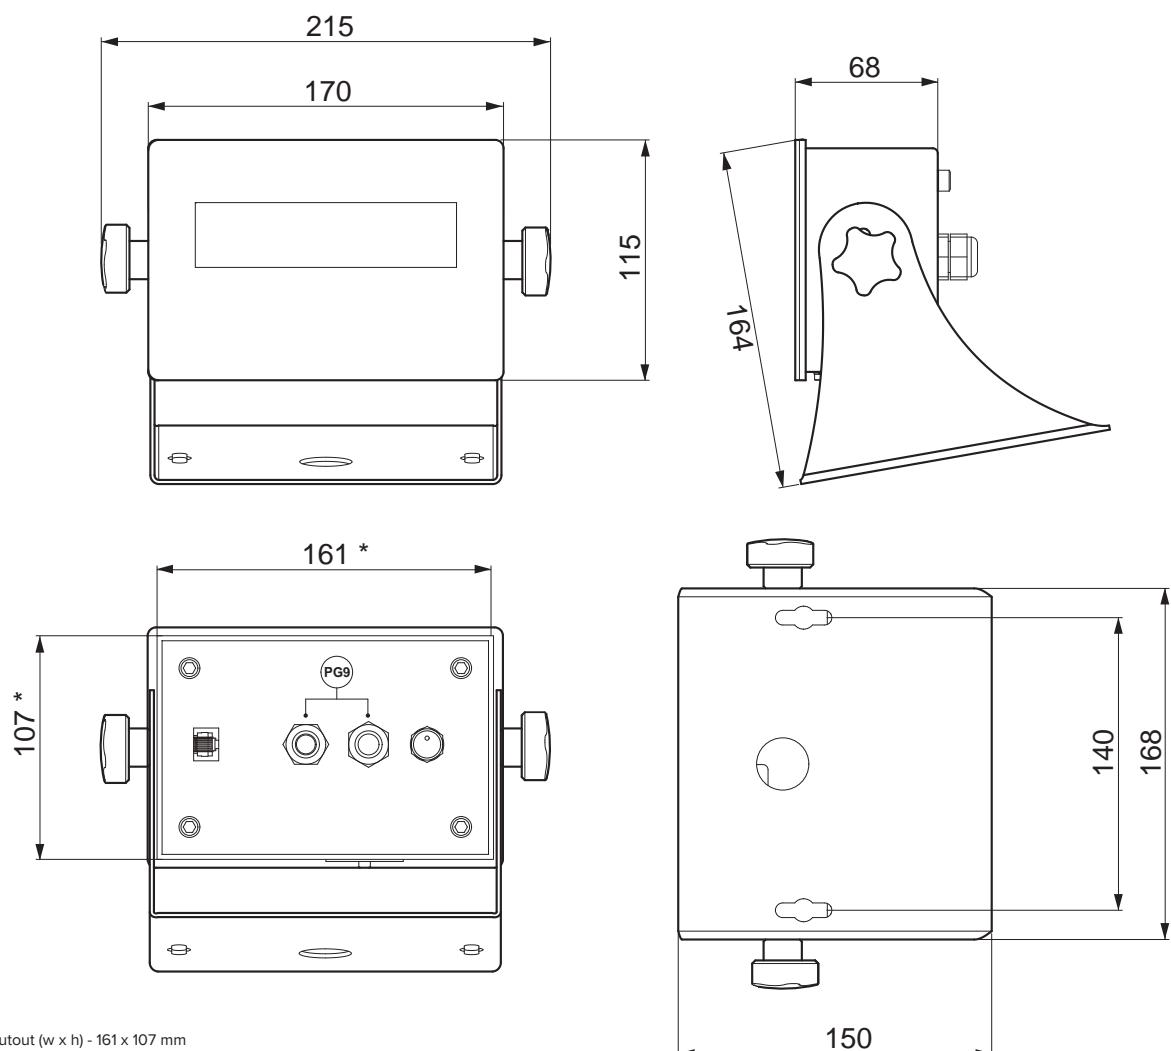

* Panel cutout (w x h) - 161 x 107 mm

DGT20I | 1 CHANNEL

Main features

Technical features

Number of scales / channels	1 (up to 4 upon request)	
Calibration	Electronic (Theoretical)	Real calibration with sample weights
Communication rate	Up to 400 Hz	
Maximum display digits	0...800.000	
Maximum load cell number	Up to 8 x 350 Ω	
Minimum sensitivity	High resolution	0,01 µV/d
	Legal for trade	0,3 µV/e
Legal for trade number of intervals	Up to 10.000e or multirange 2 x 3.000e	
Load cell excitation voltage	5 V	
Communication ports	See version table	
Communication protocols	Modbus RTU, ASCII or fieldbus	
Communication rate	Via serial port	Via Fieldbus
	Up to 325 Hz	Up to 16 Hz
Configuration PC utility	DiniTools	
Display	Red LED 6 20-mm digits and 6 LEDs to show the active functions	
Keyboard	Waterproof mechanical, 5 keys	
IP protection rating	IP68	
Case	Full stainless steel AISI 304 enclosure. Wall bracket included.	
Power supply	12÷24 Vdc, 5 W. Power supply unit included.	
Operating temperature range	Internal Use	OIML approved
	-20 °C / +60 °C	-10 °C / +40 °C
	Humidity	
	85 %	

Approvals	Type	Description
2014/30/EU EMC	Electric	EN 61000-6-2 : 2005 EN 61000-6-4 : 2007+A1 : 2011 EN 61326-1: 2013 EN 61326-1 : 2013 EN 55011 : 2009+A1 : 2010 EN 55011 : 2009+A1 : 2010
2014/35/EU LVD	Electric	EN 61010-1 : 2010
2011/65/EU (RoHS)	Electric	EN 50581 : 2012
OIML R61 - MID	Metrological	AWI - Automatic filling machine
OIML R51 - MID	Metrological	AWI - Checkweighers
OIML R76	Metrological	NAWI - Weight transmitter
EU Type Examination Certificate (2014/31/EU)	Metrological	NAWI - Weight transmitter

Analog output	
Settings	0÷5 Vdc, 0÷10 Vdc, 0÷20 mA, 4÷20 mA
Resolution	16 bit
Communication rate	0,1 s
Opto-isolated as standard	Yes

Digital inputs / outputs	V	I
2 Digital inputs	12÷24 Vdc	5÷20 mA
2 Digital outputs	48 Vac 60 Vdc	150 mA
Opto-isolated as standard		Yes


Version codes

Analog output	Modbus RTU	RS485	RS232	2 IN / 2 OUT	230V Plug	Code	
	•	•	•	•	•	DGT20I-1	
	•	•	•	•	•	DGT20IPW	
•	•	•	•	•	•	DGT20IAN-1	

Main options and accessories (for a complete list visit www.diniargeo.com)

	Description	Code	
SUPPORT BRACKETS	 Kit for panel installation.	DGT20ISTF	

Technical drawing (mm)

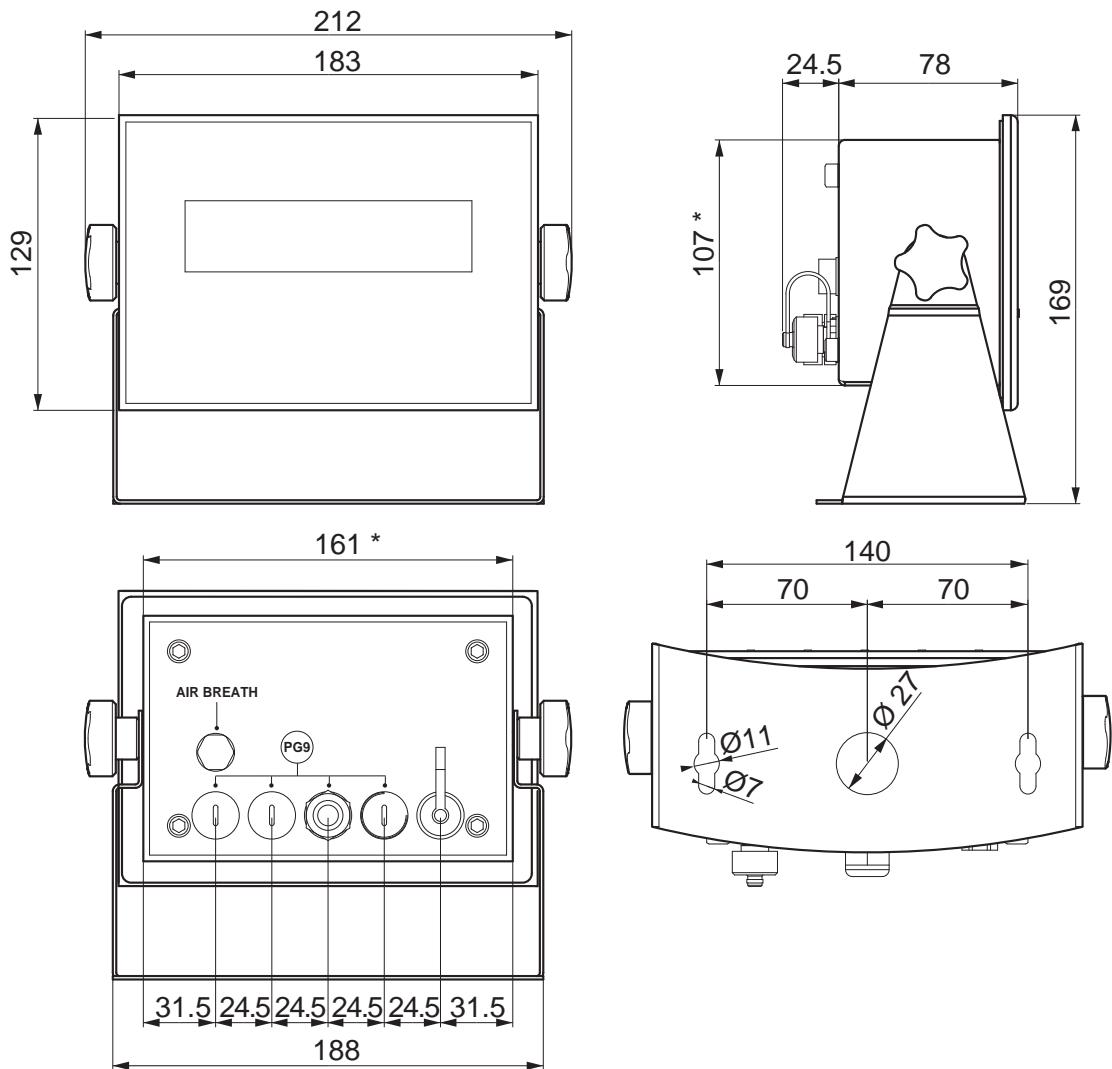

* Panel cutout (w x h) - 161 x 107 mm

GENERAL SALES AND WARRANTY CONDITIONS

Sales prices are always net of VAT, to be paid by the buyer.

WARRANTY / TECHNICAL ASSISTANCE - INSTALLATION / RETURNED GOODS

The warranty period is 24 months from delivery, excluding the parts classified as expendable materials such as: mechanical print heads, batteries, mass storages (SD, USB, etc.), electric motors, and wheels. The warranty period for these expendable materials is 3 months.

The warranty refers to breakdowns resulting from any construction defect or material defect of the product supplied and covers the cost of labour and spare parts. The product must be returned to Dini Argeo headquarters in its original packaging with shipping paid by the sender.

If work is required at the place of use, the applicant will bear the technician's transfer expenses. Dini Argeo will bear the labour of the repair and the cost of any replaced parts.

The warranty does not apply to breakdowns due to improper use or non-observance of the operating instructions, electrical phenomenon, tampering, unauthorised attempted repair, connections to other equipment or removal of any product identification elements (serial number, label, etc.). This warranty does not provide for any compensation for damages, direct or indirect, incurred by the user due to complete or partial failure of instruments or systems sold, even during the warranty period. The warranty for the load cells excludes the damages caused by impacts and overloads (the overload is evident if the cell output signal measured, powered and without load, has an output voltage over 1 mV).

REPAIRS - RETURNED GOODS - RMA

Repairs at Dini Argeo premises are carried out at the current hourly rates and on the basis of the prices shown in the spare parts price list. If the repair price estimate is necessary before proceeding, the applicant must explicitly request it when ordering the repair of the goods. In this case the repair will be made once the price estimate filled in by the Dini Argeo technical assistance dept. has been accepted.

Technical assistance and/or installation at the customer's premises is carried out upon agreement with Dini Argeo technical and/or sales personnel and with written confirmation for acceptance of the conditions in force.

The repair of DINI ARGEO products must be requested by sending the proper RMA (Return Material Authorization) form. Once the form has been received the Technical Assistance Dept. will communicate the applicant the RMA number that is to be indicated on the documents of transport. To use this service, simply access the reserved area and fill in the on-line form in order to send the material for repair.

Returned products will only be accepted, if previously agreed upon and authorised by Dini Argeo's sales office.

TRANSPORT AND PACKAGING

Delivery is Ex Works. The transport risks, loss and/or damage of goods, are to be borne by the buyer even if the goods are delivered carriage free. Transportation by couriers affiliated with Dini Argeo is available.

The prices shown include also cardboard packaging when the goods fit in a carton with dimensions up to 680 x 520 x 320 mm. When the goods take up more space pallets are used.

MINIMUM INVOICING / PAYMENT / OTHER CONDITIONS

For orders whose total amounts are less than 50 Euro, prices are net of discounts.

Payment delays, collection fees, and interest arrears will be charged at the "prime rate" increased by 5 percentage points. Any claims or objections do not authorise the buyer to delay or suspend payments.

The sales prices are considered accepted by Dini Argeo only after written confirmation of the purchase order by Dini Argeo and except for what was sold.

Dini Argeo reserves the right of ownership on the delivered material until the customer has paid for the goods. Any disputes arising under or in connection with the supply of products shall be finally settled according to Italian law and the place of jurisdiction is Modena.

SELLING AND SUPPORTING PRODUCTS RESTRICTIONS

As countries and companies place restrictions on the locations they will do business with, it is critical you understand how these restrictions may apply to you, so you can maintain trade compliance.

Companies located in these countries cannot receive sales or support for Rice Lake's global brands products from our offices or through our authorized distributors; for the most up to date list of countries and regions that have restrictions, please visit the [General Sales and Warranty Conditions](#) page on the Dini Argeo website.

Dini Argeo dealer network:
over 3500 partners
in more than 85 countries across the world

"YOUR WORLDWIDE PARTNER
FOR WEIGHING"



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 843418

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 921784

OTHER DINI ARGEO LOCATIONS

DINI ARGEO WEIGHING INSTRUMENTS Ltd
China
DINI ARGEO UK Ltd
United Kingdom
DINI ARGEO FRANCE sarl
France
DINI ARGEO GMBH
Germany
DINI ARGEO OCEANIA
Australia

WHY CHOOSE DINI ARGEO?



WORLDWIDE SERVICE AND SHIPPING

International group with offices in America, Europe, India, China, Mexico and Oceania, over 900 employees and a network of specialised partners in 130 countries worldwide.



FAST SHIPPING

Dini Argeo always keeps complete systems in stock that can be shipped quickly.



MADE IN ITALY

Dini Argeo weighing solutions are made in Italy and guarantee the highest quality standards.

SALES SERVICE AND TECHNICAL ASSISTANCE

Mod LCELL-CEN

P/N LCELL-CEN

Sn NOSN

LCELL-CEN/NOSN

Rev. 01.01.2023