

3590ETT

3590ETT "TOUCH": Touch Screen weight indicator with adjustable inclination



Digital weight indicator with a big touch screen display and with adjustable inclination, suitable for advanced industrial applications. It allows the visualization of all the weighing data and the customization of the screens, simplifying the user operations. Fitted with 3 serial ports, transmission protocols for data communication, completely configurable printouts, integrated alibi memory, and port for connection to barcode/badge reader. CE-M approvable (OIML R-76 / EN 45501).



The best solution
for advanced industrial
applications

MAIN FEATURES

- Backlit graphic display with touch screen technology, l x h = 120x90mm size. Screens completely customizable.
- Multilanguage software.
- Selectable QWERTY, AZERTY & QWERTZ keyboard, selectable.
- IP65 rated stainless steel enclosure.
- Dimensions: 298x176x110 mm.
- Waterproof front panel, ideal for wet environments.
- Easy and fast to clean thanks to the scratchproof smooth surface.
- Suitable for food contact (physiologically inert).
- As standard fitted with a support bracket with adjustable inclination, suitable for use on the table, column, or wall.
- Real time clock and permanent data storage.
- Fitted alibi memory, integrated on the motherboard.
- Slot for built-in micro SD for recording logos (upon request).
- Functions available with DINI TOOLS utility
 - Configuration, data entry and print formatting.
 - Recording and filing of all the information on PC.
 - Complete retrieval of the configuration.
 - Customization of the screens.
- 24-bit A/D converter, 4 channels, up to 3200 conv./sec. and up to 8 signal linearisation points.
- 4 independent analogue channels (up to 2 in the E-AF03 version) for reading of the weight.
- Connection with up to 16 analogue load cells of 350 Ohm (45 load cells of 1000 Ohm) and with the main digital load cells available on the market (mod. E-AF03).
- Up to 10.000e OIML or 3 x 3000e @ 0,3 μ V/d CE-M legal for trade.
- Up to 1.000.000 displayable divisions for internal factory use, with internal resolution up to 3.000.000 points.
- Connectable to printers and labellers with free programming of the printout formats.
- 110-240 Vac power supply.

MAIN CERTIFICATIONS

- EC Type Approval (EN45501)
- OIML R76
- OIML R51 - MID
- OIML R134 (AF09)

APPLICATION SOFTWARE

- AE01: Totalization and formula weighing (integrated)
- AE02: Pieces/quantity counting (optional)
- AE03: Weighbridges - Input/Output vehicle (optional)
- AE04: Statistical checking of prepackaged goods (optional)
- AE05: Price computing and industrial labelling (optional)
- AE08: Management of wheel and axle weighing systems (optional)
- BATCH1: Single product dosage systems in loading and unloading (optional)

CUSTOMISED APPLICATIONS


Thanks to our integrated development, you can create complete customised applications in autonomy:

- wizards, operator messages
- serial port management, protocols customization
- digital I/O full management
- sequential or simultaneous automations
- data entry, custom archives

Dini Argeo can offer the service of custom development programs.

COMPLETELY CUSTOMIZABLE SCREENS

- Thanks to the programmable Touch Screen Display, you can create custom-made interfaces for any application:

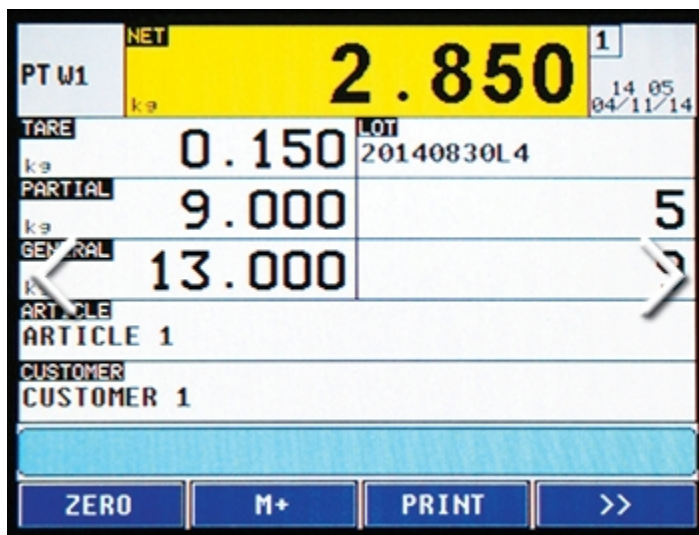

- The "Dini Display Tool" is a PC software which allows you to quickly customize the TOUCH SCREEN.



I/O SECTION

- 2 RS232 serial ports, for connection to printer, PC or PLC, radio module, PC or PLC, badge reader or remote scale.
- 1 RS232 serial port (optional RS485), for connection to repeater, remote scale, barcode/badge readers or digital load cells.
- Fitted keyboard emulation input, for barcode/badge readers or external PC keyboard, through cable with mini DIN connector (optional).
- 4 optoisolated outputs (optional), that can be increased up to 16 with the expansion board (optional).
- 2 optoisolated inputs (optional), that can be increased up to 8 with the expansion board (optional).
- External Profibus interface (optional), for automation management.
- Modbus RTU protocol.
- Optional Bluetooth connection, for quick wireless programming of the archives, through PC, Tablet o Smartphone.



www.diniargeo.com

“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 843418

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 921784

SALES AND TECHNICAL ASSISTANCE SERVICE